


U S A

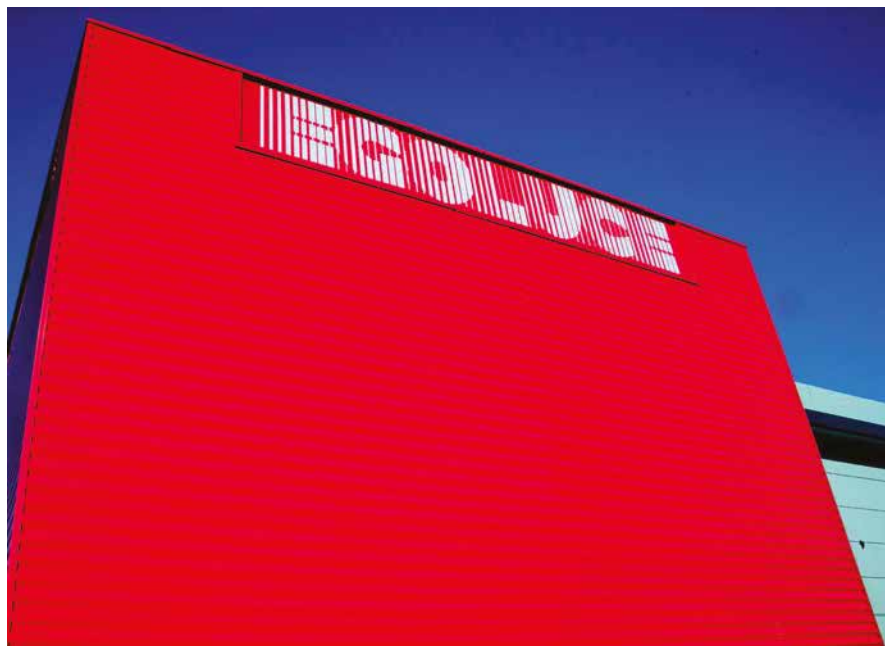

45 years of success 45 años de éxitos

Since 1978 EgoLuce, founded by three friends: Bruno, Mario e Renato with a great lighting experience and passion, has been manufacturing 100% Made in Italy lighting products, collaborating with Italian companies and artisans to offer the highest quality and long-lasting light fixtures for various applications. Experience, innovation, and technology are the values that have made EgoLuce one of the important players in the worldwide lighting industry.

Our know-how and attention to detail in every production phase have been the main aspects of EgoLuce success. We constantly research and test innovative solutions to develop products with the latest materials, technologies, and design trends. Our products are designed to be energy efficient and eco-friendly, contributing to environmental sustainability. At EgoLuce, we believe that modern lighting

Desde 1978 EgoLuce, fundada por tres amigos: Bruno, Mario y Renato con una gran experiencia y pasión por la iluminación, fabrica productos de iluminación 100% Made in Italy, trabajando con empresas y artesanos italianos para ofrecer luminarias de la más alta calidad y durabilidad para diferentes aplicaciones. Experiencia, innovación y tecnología son los valores que han convertido a EgoLuce en uno de los principales actores de la industria de la iluminación en todo el mundo.

Nuestro saber hacer y nuestra atención al detalle en cada fase de la producción han sido aspectos clave del éxito de EgoLuce. Investigamos y probamos constantemente soluciones innovadoras para desarrollar productos con los últimos materiales, tecnologías y tendencias de diseño. Nuestros productos están diseñados para ser eficientes energéticamente y respetuosos con el medio ambiente, contribuyendo así a la sostenibilidad medioambiental.

controls should consider the human biorhythm and positively impact our health and well-being. We are dedicated to create lighting solutions that enhance the perception of the spaces and provide an unforgettable sensorial experience.

EgoLuce offers lighting solutions to Architects, Lighting Specialists, Designers, and Specifiers. We also provide our customers with tailored solutions and custom products for every market demand.

At EgoLuce, we are proud to be part of the great Italian tradition of craftsmanship and design.

En EgoLuce creemos que los sistemas modernos de control de la iluminación deben tener en cuenta el biorritmo humano y repercutir positivamente en nuestra salud y bienestar. Nos dedicamos a crear soluciones técnicas de iluminación que mejoran la percepción de los espacios y proporcionan una experiencia sensorial inolvidable.

EgoLuce ofrece soluciones de iluminación a arquitectos, especialistas en iluminación, diseñadores y técnicos. También ofrecemos a nuestros clientes soluciones a medida y productos personalizados para cada necesidad del mercado.

En EgoLuce estamos orgullosos de formar parte de la gran tradición italiana de artesanía y diseño.

100% MADE IN ITALY 



4 good reasons to choose Egoluce

4 buenas razones para elegir EGOLUCE

1 – LED

EGOLUCE products are equipped with latest generation LED. We use different technologies to grant very good performances:

- Excellent luminous efficacy.
- Very good colour rendering.
- Different light colours.
- Designed to last for a very long time.

2 – MATERIALS

We have selected best materials for products that must have long-lasting life:

- ALUMINIUM – ductile and unalterable grants an optimal heat dissipation (important to grant longest operational life of LED).
- STAINLESS STEEL – the best warranty for fixtures that must resist to atmospheric or chemical agents (salt, chlorine, etc.)
- CLEAR CRYSTAL: to create objects with unique light effects and reflections.
- METHACRYLATE: to diffuse and at the same time shade the punctual light of LED.

3- GENERAL FEATURES

Small details that makes a great product:• LED unit easy to replace, the light source can be replaced as if it were a common lamp.

- Proper heat sink device placed in every product to grant maximum lifetime for the LED.
- Most of the products can be operated both at 350 mA or 500 mA.
- Optimization of the luminous flux obtained by the use of lenses and reflectors.

4 – SAFETY

A granted quality

- All our models undergo rigorous temperature and functional testing.
- All electronic components displayed in our catalogue (drivers, dimmers) are marked with European quality certification (ENEC).
- 100% of our products undergo quality and

1 - LED

Los productos EGOLUCE están equipados con fuentes LED de última generación. Las distintas tecnologías aplicadas garantizan un excelente rendimiento:

- Excelente rendimiento lumínico.
- Excelente valor de reproducción cromática.
- Varias temperaturas de color.
- Fuentes diseñadas para durar.

2 - MATERIALES

Hemos seleccionado los mejores materiales para luminarias que deben durar en el tiempo:- ALUMINIO: dúctil e inalterable, garantiza una excelente dispersión del calor (importante para optimizar la vida útil de los LED).

- ACERO INOXIDABLE: la mejor garantía para luminarias que deben resistir agentes atmosféricos o químicos (sal, cloro, etc.).
- CRISTAL CLARO: para crear objetos con efectos de luz y proyecciones únicos.
- METACRYLATE: para difundir y al mismo tiempo enmascarar la luz puntual del LED

3 - CARACTERÍSTICAS GENERALES

Pequeños detalles que hacen grande a un producto:

- Fácil sustitución por LED, la fuente de luz se puede sustituir tan fácilmente como una bombilla normal.
- Presencia de disipadores de calor adecuados en todos los productos para garantizar la durabilidad de los LED.
- Posibilidad de alimentar la mayoría de los productos con 350 mA o 500 mA
- Optimización del flujo luminoso mediante el uso de lentes o parábolas.

4 - SEGURIDAD

Calidad garantizada:

- Todos los modelos se someten a pruebas térmicas y funcionales.
- Todos los componentes electrónicos ofrecidos en el catálogo (controladores, atenuadores) llevan la marca de calidad europea (ENEC).
- El 100% de la producción se somete a pruebas de calidad y funcionamiento antes de salir al mercado.



Fixture repairable. Aparato reparabile.

EGOLUCE models are designed and produced according to the best quality standards existing on the technical lighting market following the "well made" standard: in full compliance with both quality and regulatory rules, in the fields of application of our products.

- Care and precision of the design aimed at a production of the highest quality.
- Excellent quality in the manufacture of products thanks to: high selection of high-end components, attention to coating, precise and punctual assembly and packaging, perfect for all types of shipping.
- Extremely severe durability and reliability tests: both on individual components and on final products.

These targets guarantees 5 years warranty on correctly installed EGOLUCE products and components following the instruction for users.

Los modelos de EGOLUCE se diseñan y fabrican con los más altos estándares de calidad del mercado de la iluminación, siguiendo el criterio de "hacer las cosas bien" en pleno cumplimiento de las normas tanto de calidad como reglamentarias en los ámbitos de aplicación de nuestros productos.

- Cuidado y precisión en el diseño para una producción de máxima calidad.
- Excelente calidad en la fabricación de productos gracias a: selección de componentes de alta gama, cuidado en el acabado, montaje preciso y puntual, embalaje impecable para todo tipo de envíos.
- Pruebas extremadamente rigurosas de durabilidad y fiabilidad, tanto en componentes individuales como en aparatos acabados.

Esto asegura una garantía de 5 años para los productos y componentes EGOLUCE correctamente instalados según las hojas de instrucciones.



Products without the ETL certification mark are wired 110V

Los productos sin la marca de certificación ETL están conectados a 110V



Layout

Still Life
Configuración

Code
Código

Name
Nombre

Picture
Fotos

Zeppelin
Design U.T. EGOLUCE

IP67, DALI, R, LAR, Plasterboard spring included / Muelle de escayola incluido

ROUND / RONDA: Ø 1.57"

FRAMEWORK / MARCO: 1.57"x1.57"

6348 / f / —	0.18 lb
.33 Stainless steel AISI 316L - Acero cepillado	
/W LED max 2W 500mA 209lm 4000K	
/WW LED max 2W 500mA 199lm 3000K	
/XW LED max 2W 500mA 189lm 2700K	

Wide beam / Haz de luz ancho

ACCESSORIES / ACCESORIOS: Plastic Box (0216), Kit draining junction box + IP68 connector (0220)

DRIVERS / CONDUCTORES: 0127, 0128, 0141/DIM, 0141/DALI, 0145/DALI

Only serial connection - Solo conexión serie

Technical Data
Datos técnicos

Technical Drawing
Dibujo técnico

Accessories
Accesorios

Drivers
Conductores

PRODUCT / PRODUCTO

Bold characters are used for code and specifications needed to identify the product code to be indicated in orders.

Los caracteres en negrita se utilizan para el código y las especificaciones que contribuyen a la definición del producto que debe indicarse en los pedidos.

Finish
Acabado

Light color
Color claro

Gross Lumen Package
Lúmenes nominales

6348 / f / —	0.18 lb
.33 Stainless steel AISI 316L - Acero cepillado	1,26"
Source LED cod.	
/W LED max 2W 500mA 209lm 4000K	
/WW LED max 2W 500mA 199lm 3000K	
/XW LED max 2W 500mA 189lm 2700K	

SIGNS / SÍMBOLOS

- Floor - Table / Suelo - Mesa
- Wall / Pared
- Suspension - Ceiling / Suspensión - Techo
- Cut out (round) / Agujero empotrado (redondo)
- Recessed hole (square) / Agujero empotrado (cuadrado)
- Walk over fitting / Luminarias transitables
- Drive over fittings / Calzadas
- Surface temperature <.....°C / Temperatura superficial <.....°C
- Converter not included / Fuente de alimentación excluida
- Converter included / Fuente de alimentación incluida
- Cable length / Longitud del cable
- Dimmer included / Regulador de intensidad incluido
- CRI >90
- Fixture repairable / Luminaria reparable
- Degrees / Grados
- Turnable / Ajustable
- Weight / Peso
- Rechargeable battery / Batería recargable
- IP65 Water resistant / Resistente al agua
- Tunable white TW / 2700K-3000K

IP / IP

- 1st digit:** protection against penetration by solid bodies.
1er dígito: protección contra la penetración de sólidos.
- 0** No protection. / Desprotegido.
- 1** Protected against solid matters (over 1.97"). / Protegido de sólidos mayores de 1.97".
- 2** Protected against solid matters (over 12mm). / Protegido de sólidos mayores de 12 mm.
- 3** Protected against solid matters (over 0.98"). / Protegido de sólidos mayores de 0.98".
- 4** Protected against solid matters (over 0.039"). / Protegido de sólidos superiores a 0.039".
- 5** Dust proof. / Protegido contra el polvo.
- 6** Fully dust proof. / Totalmente protegido contra el polvo.

- 2nd digit:** protection against penetration by water.
2º dígito: protección contra la penetración de agua.
- 0** No protection. / Desprotegido.
- 1** Protected against drops of water falling vertically. / Protegido contra la caída vertical de gotas de agua.
- 3** Rain proof fixture. / Protegido contra la lluvia.
- 4** Splash proof fixture. / Protegido contra salpicaduras.
- 5** Water jet proof. / Protegido contra chorros de agua.
- 6** Wave proof. / Protegido contra las olas.
- 7** Watertight immersion fixture. / Protegido contra la inmersión.

MARK / MARCAS

- Fixture on Class II, with double or reinforced insulation. / Luminaria de clase II con aislamiento doble o reforzado.
- SELV fixture with remote transformer. / Luminaria de muy baja tensión con transformador remoto.
- Fixture ready for installation on normally inflammable surfaces. / Luminaria adecuada para su instalación en superficies normalmente inflamables.



LIGHT COLOR CODES / CÓDIGOS DE COLOR DE LAS LUCES


- /XW** Extra White Led 2700K
- /WW** Warm White Led 3000K
- /W** Natural White Led 4000K
- /B** Blue Led

OPTION CODES / CÓDIGO DE VERSIÓN

- /EM** Emergency / Emergencia
- /DIM** Dimming / Regulable
- /DALI** Dimming / Regulable
- /ST** Satin diffuser / Con difusor satinado
- /TR** Transparent diffuser / Con difusor transparente



Finishes / Acabados

 <p>.00 Clear <i>Transparente</i></p>	 <p>.01 White <i>Blanco</i></p>	 <p>.02 Black <i>Negro</i></p>	 <p>.05 Red <i>Rojo</i></p>
 <p>.06 Green <i>Verde</i></p>	 <p>.14 Blackboard <i>Pizarra</i></p>	 <p>.21 Shiny golded <i>Oro brillante</i></p>	 <p>.25 Golded Satin <i>Satén dorado</i></p>
 <p>.29 Gold leaf <i>Hoja de Oro</i></p>	 <p>.30 Silver leaf <i>Hoja de plata</i></p>	 <p>.31 Chromed <i>Cromado</i></p>	 <p>.32 Nickel mat <i>Níquel satinado</i></p>
 <p>.33 Stainless steel AISI 316L <i>Acero cepillado AISI 316L</i></p>	 <p>.34 Painted corten finishing <i>Corten pintado</i></p>	 <p>.39 Painted Anthracite finishing <i>Pintado antracita</i></p>	 <p>.45 Aluminium anodized <i>Aluminio anodizado</i></p>
 <p>.50 Crystal <i>Cristal</i></p>	 <p>.56 Mirror <i>Espejo</i></p>	 <p>.57 Blown white glass <i>Vidrio blanco soplado</i></p>	 <p>.85 Painted silver finishing <i>Plata pintada</i></p>
 <p>.86 Painted gold finishing <i>Oro pintado</i></p>	 <p>.87 Painted copper finishing <i>Cobre pintado</i></p>	 <p>.88 Painted bronze finishing <i>Bronce pintado</i></p>	






Index / Índice




Lancia Tonda
14



Lancia Tonda XL /XXL
20



Lancia Tonda System
24



Lancia Tonda
32




Lancia
38




Lancia System
44



Lancia no limits
48




Lancia di Achille
54



Matita
60



Radar
68



Moonlight
74



Tiny
90



Newton Spots
108




Newton Spots Slim
118



Newton Spots Flat
120



Newton Track 48V
124




Newton Slim Track 48V
126



Newton Flat Track 48V
130



Newton System
134



Stick System
144



Linea
150



Joy
164



Lara
190



Lara Maxi
192



Wanda
202



Wanda System
212



Spooky
220



Zeppelin
242



Zeppelin 25 Plus
244



Zeppelin Maxi
246



Zeppelin COB
250



Zeppelin Orientabile
252



Tris
254



Drive
258



Vista
262



Kross
268



Step
272



Soft
276



Cerchio
280



Vision 1
288



Vision 3
290



Top
294



Top Mini
296



Dot
298



Pix
302



Sirio
306



Alcor
310



Vega
314



Fire
318



Ice
322



Snorky
326



Cerchietto
330



Cruise
334



Spoon
338



Slot
346

INDOOR

Lancia

Design P. Peperè



Adjustable suspension lamp with both direct or diffused light. A body of extruded aluminum with an opal polycarbonate diffuser, injection-molded ABS caps, and a transparent coaxial power cable of 250 cm. Lancia System offers multiple compositions. The coupling system allows you to rotate the profile and direct the light in the desired direction. The elegant line gives it an appearance that adapts well to any space, from classic to modern interiors.

Lámpara de suspensión regulable con ambas luz directa o difusa. Un cuerpo de aluminio extruido con un difusor de policarbonato opalino, tapas de ABS moldeadas por inyección y un cable de alimentación coaxial transparente de 250 cm. El sistema Lancia ofrece múltiples composiciones. El sistema de acoplamiento permite girar el perfil y dirigir la luz en la dirección deseada. Su elegante línea le confiere un aspecto que se adapta bien a cualquier espacio, desde los interiores clásicos a los modernos.

Lancia Tonda

Design P. Pepere




Lancia Tonda

Design P. Pepere




Dimmable on request
Regulable bajo pedido

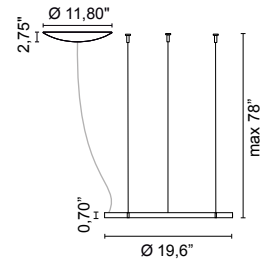

U1566 / / 2.65 lb

- .01** White - Blanco
- .02** Black - Negro
- .25** Golded satin - Oro satinado
- .31** Chromed - Cromado
- .85** Painted silver finishing - Plata pintada
- .86** Painted gold finishing - Oro pintado
- .87** Painted copper finishing - Cobre pintado
- .88** Painted bronze finishing - Bronce pintado


/W	4000K	LED 27W CRI>90	3390lm
/WW	3000K	LED 27W CRI>90	3030lm
/XW	2700K	LED 27W CRI>90	2835lm

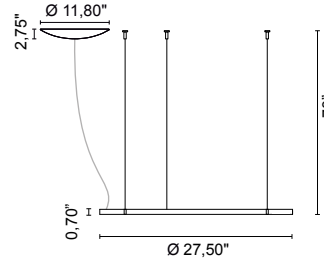

U1562 / / 3.09 lb

- .01** White - Blanco
- .02** Black - Negro
- .25** Golded satin - Oro satinado
- .31** Chromed - Cromado
- .85** Painted silver finishing - Plata pintada
- .86** Painted gold finishing - Oro pintado
- .87** Painted copper finishing - Cobre pintado
- .88** Painted bronze finishing - Bronce pintado


/W	4000K	LED 37,5W CRI>90	4746lm
/WW	3000K	LED 37,5W CRI>90	4242lm
/XW	2700K	LED 37,5W CRI>90	3969lm

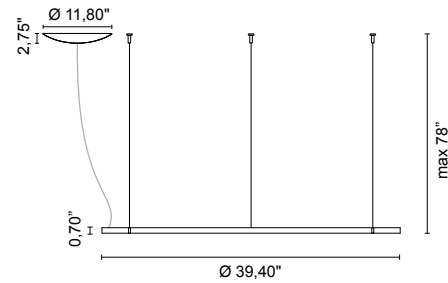

U1563 / / 3.75 lb

- .01** White - Blanco
- .02** Black - Negro
- .85** Painted silver finishing - Plata pintada
- .86** Painted gold finishing - Oro pintado
- .87** Painted copper finishing - Cobre pintado
- .88** Painted bronze finishing - Bronce pintado

/W	4000K	LED 54W CRI>90	6780lm
/WW	3000K	LED 54W CRI>90	6060lm
/XW	2700K	LED 54W CRI>90	5670lm

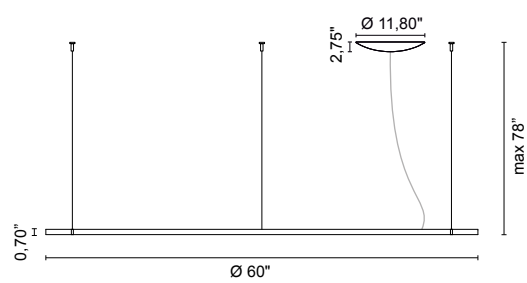

U1564 / / 5.51 lb

- .01** White - Blanco
- .02** Black - Negro
- .85** Painted silver finishing - Plata pintada
- .86** Painted gold finishing - Oro pintado
- .87** Painted copper finishing - Cobre pintado
- .88** Painted bronze finishing - Bronce pintado

/W	4000K	LED 81W CRI>90	10170lm
/WW	3000K	LED 81W CRI>90	9090lm
/XW	2700K	LED 81W CRI>90	8505lm



OPTIONAL



Displacement component
Elemento de descentralización

0536 / /

- .01** White - Blanco
- .02** Black - Negro
- .25** Golded satin - Oro satinado
- .31** Chromed - Cromado

FINISHES CODES - CÓDIGOS DE ACABADOS



- .01** White
Blanco
- .02** Black
Negro
- .25** Golded satin
Oro satinado
- .31** Chrome
Cromo
- .85** Decor silver
Decoración plateada
- .86** Decor gold
Decoración dorada
- .87** Decor copper
Decoración de cobre
- .88** Decor bronze
Decoración de bronce

Electric cable length 98,43"
Longitud del cable eléctrico 98,43"

Lancia Tonda

Design P. Peperè



Dimmable on request
Regulable bajo pedido

U1573._._ / _._ 16.00 lb

.01 White - Blanco

.02 Black - Negro

/W LED 172,5W 21696lm 4000K



/WW LED 172,5W 19392lm 3000K

/XW LED 172,5W 18144lm 2700K



On request are available compositions with rings with different diameter.

A petición están disponibles las composiciones con anillos de diferente diámetro.

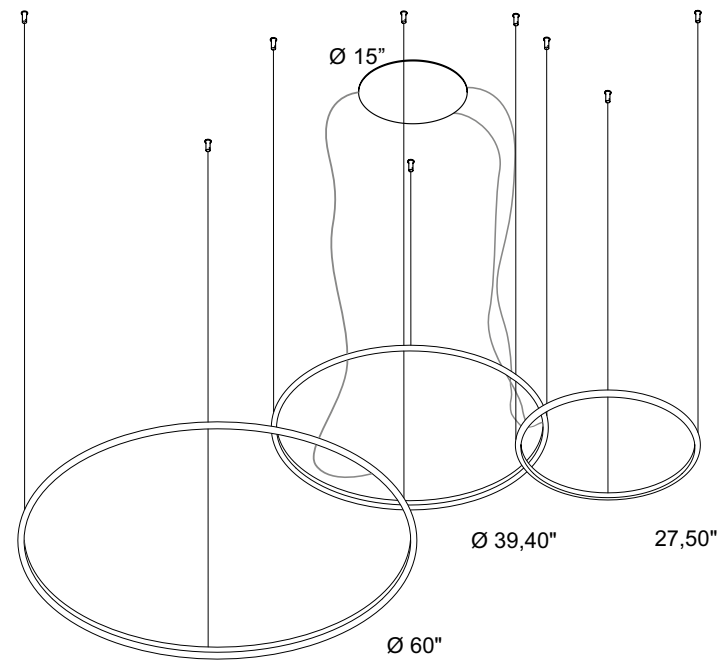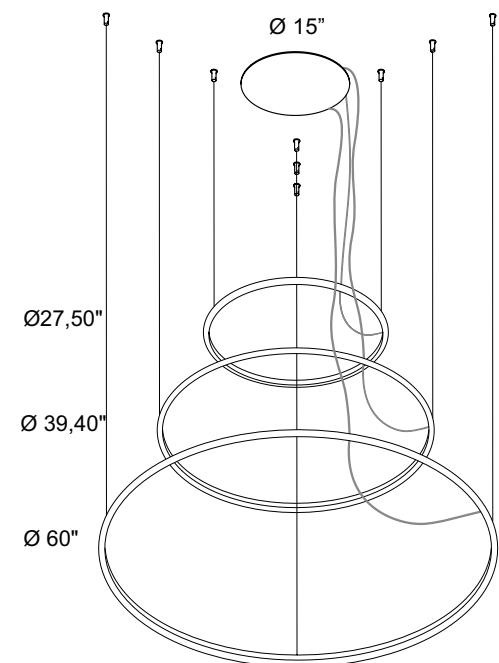

U1574._._ / _._ 16.00 lb

.01 White - Blanco

.02 Black - Negro

/W LED 172,5W 21696lm 4000K



/WW LED 172,5W 19392lm 3000K

/XW LED 172,5W 18144lm 2700K




On request are available compositions with rings with different diameter.

A petición están disponibles las composiciones con anillos de diferente diámetro.

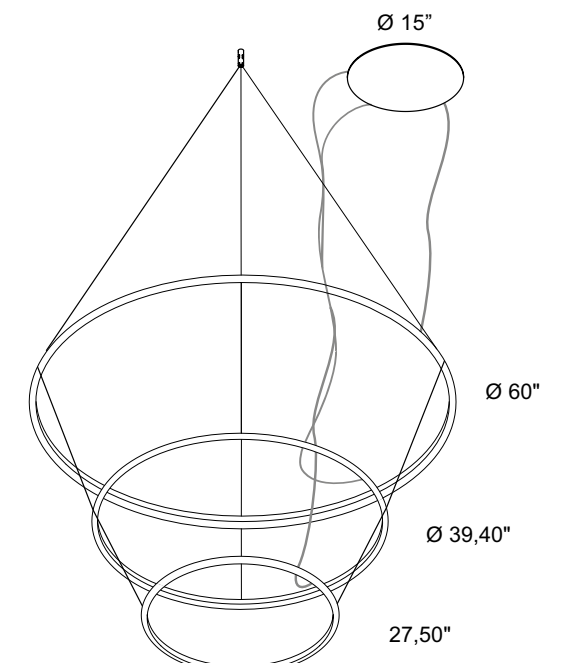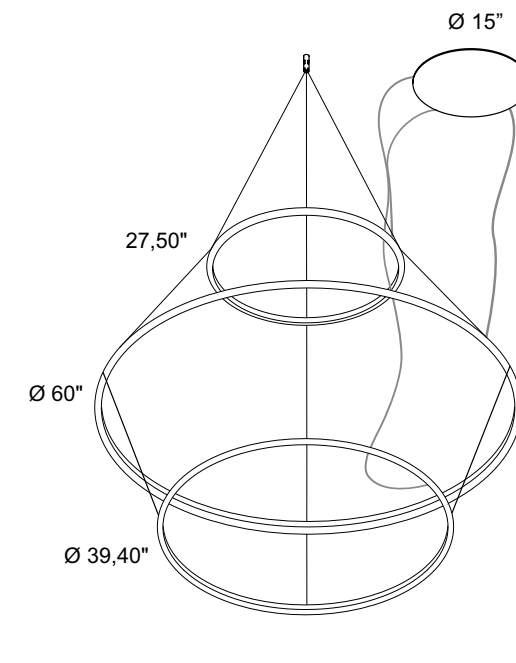

Lancia Tonda XL/XXL

Design P. Peperè

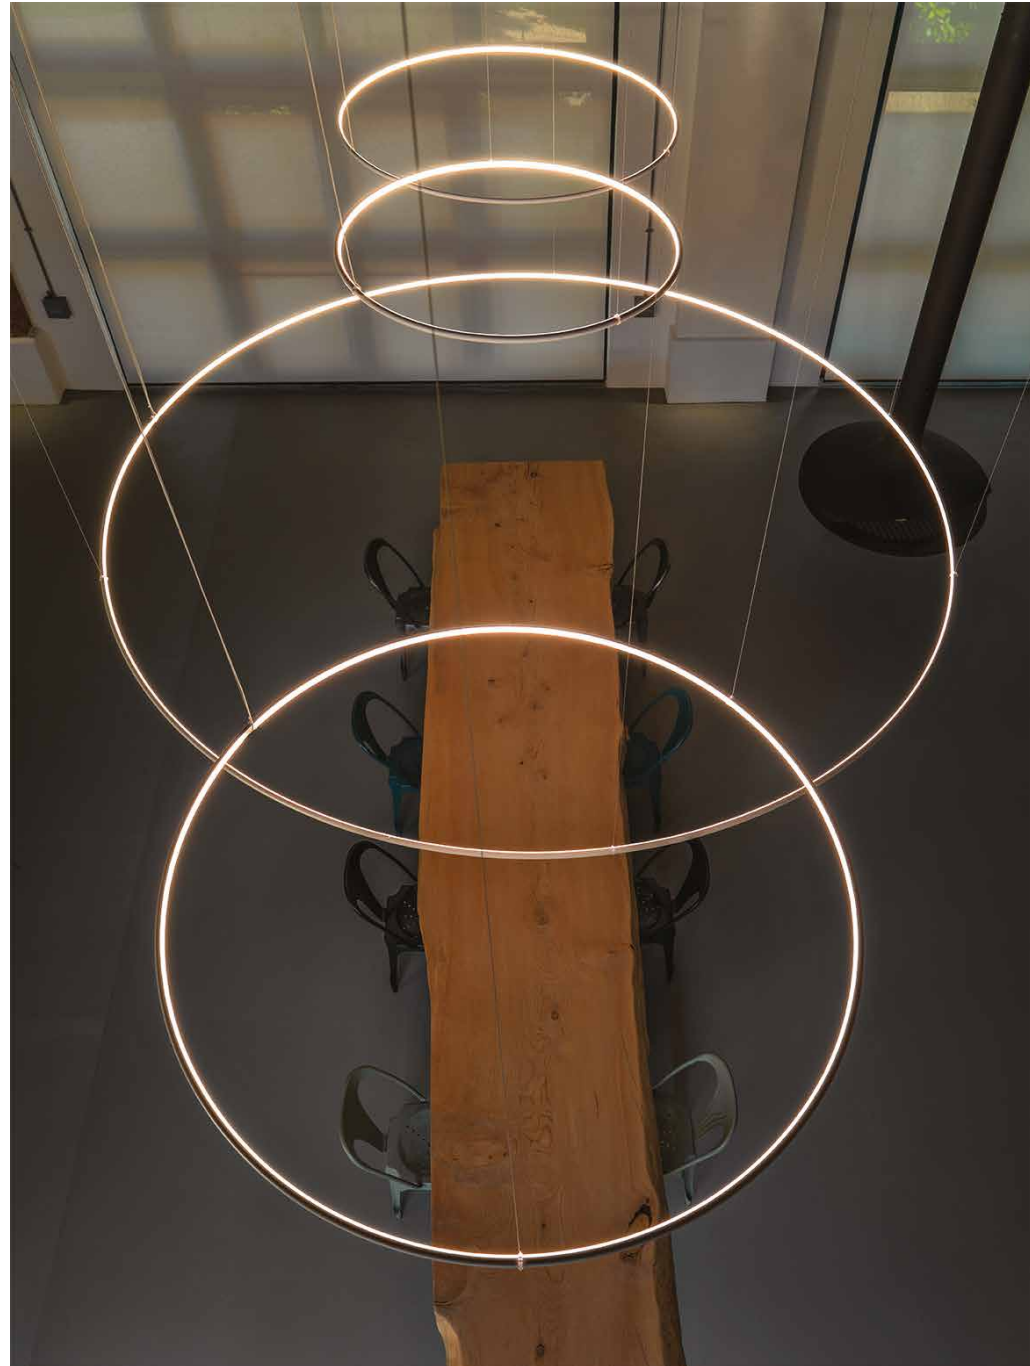


Lancia Tonda XL/XXL

Design P. Pepere



Dimmable on request
Regulable bajo pedido

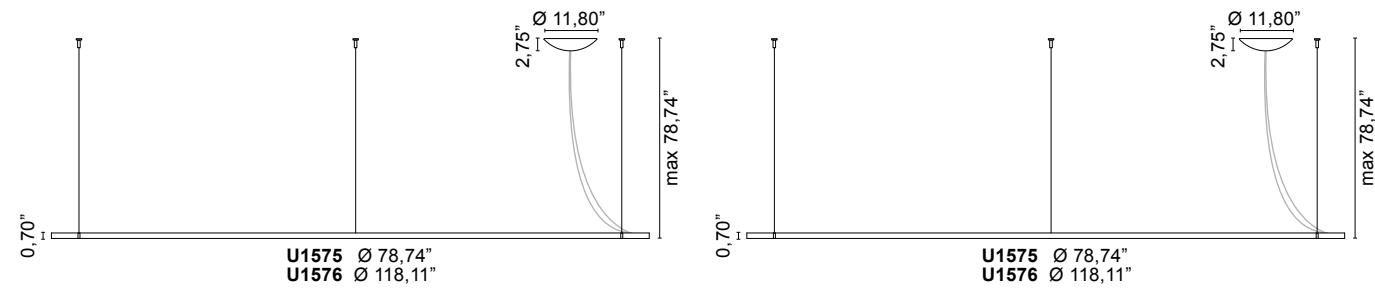

U1575 6.61 lb
U1576 11.02 lb

.01	White - Blanco	
.02	Black - Negro	

/W	4000K	LED 67W CRI>90	7560lm
/WW	3000K	LED 67W CRI>90	7140lm
/XW	2700K	LED 67W CRI>90	6720lm




U1576 11.02 lb

.01	White - Blanco	
.02	Black - Negro	

/W	4000K	LED 96W CRI>90	10800lm
/WW	3000K	LED 96W CRI>90	10120lm
/XW	2700K	LED 96W CRI>90	9600lm


ASSEMBLY SCHEME ESQUEMA DE MONTAJE

The lamp is supplied in 4 separate sectors to be assembled during installation
La lámpara se suministra en 4 secciones separadas que deben ensamblarse durante la instalación

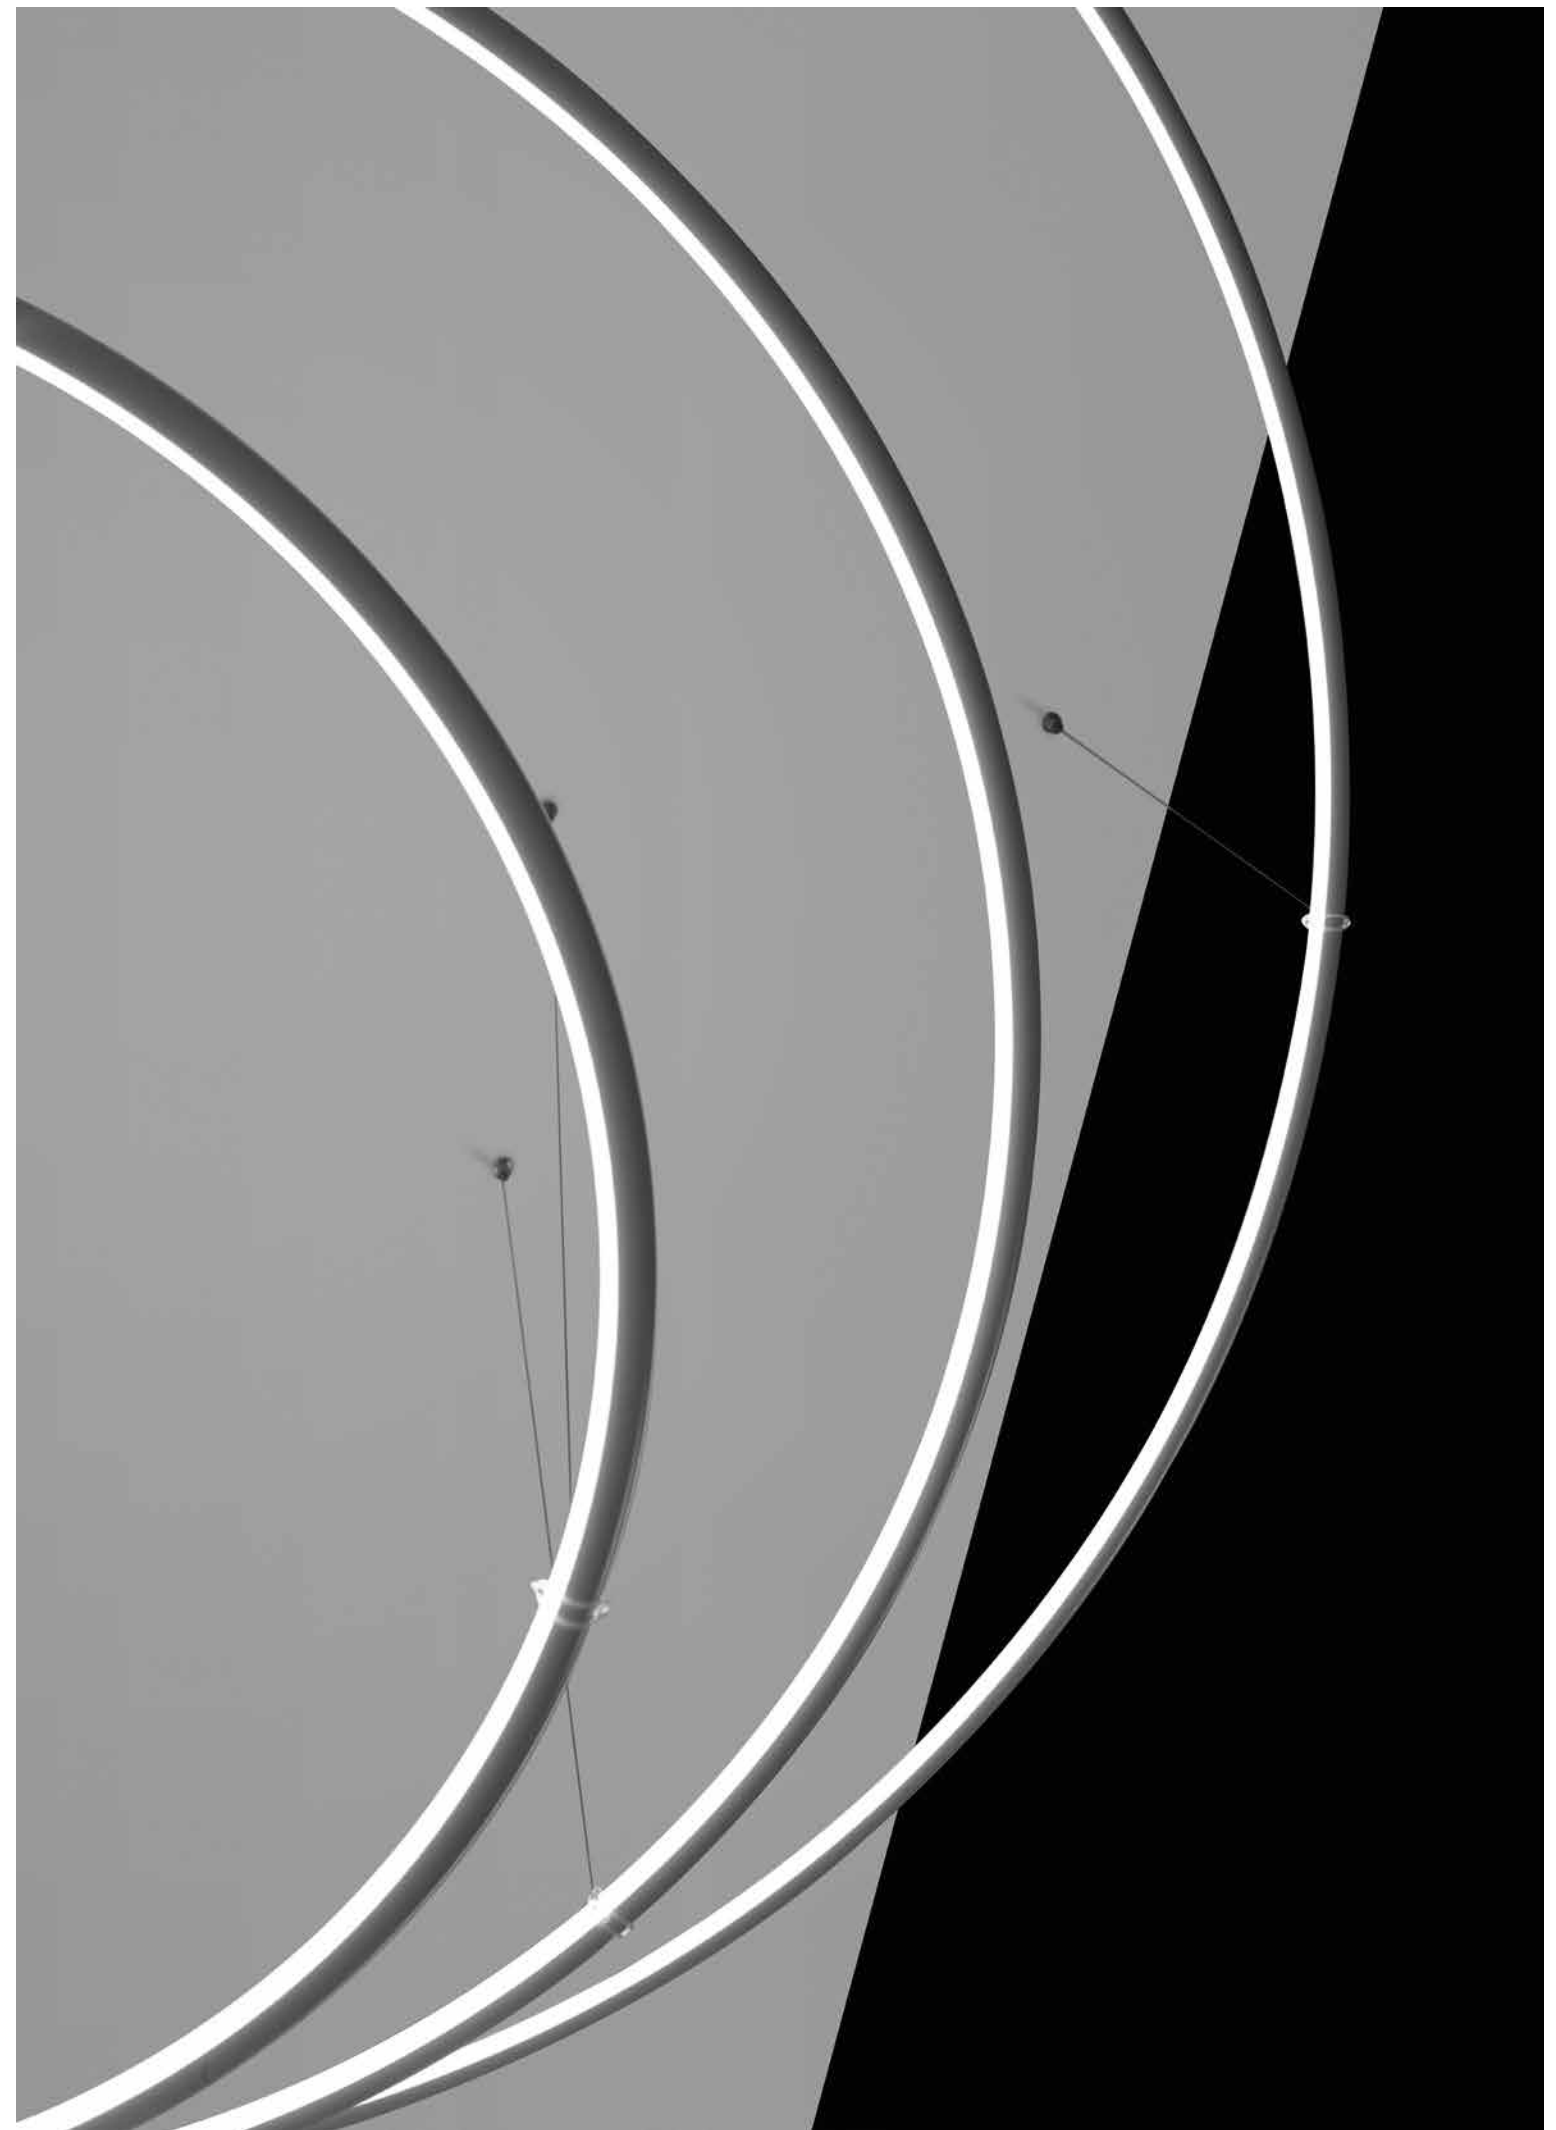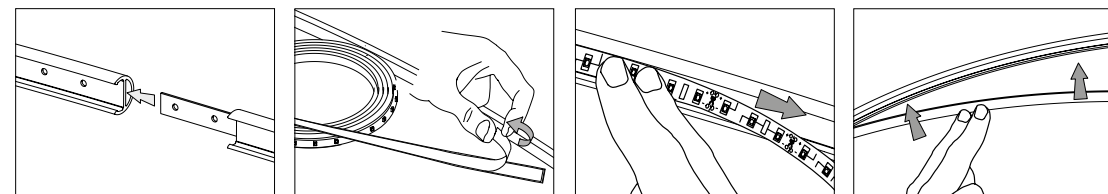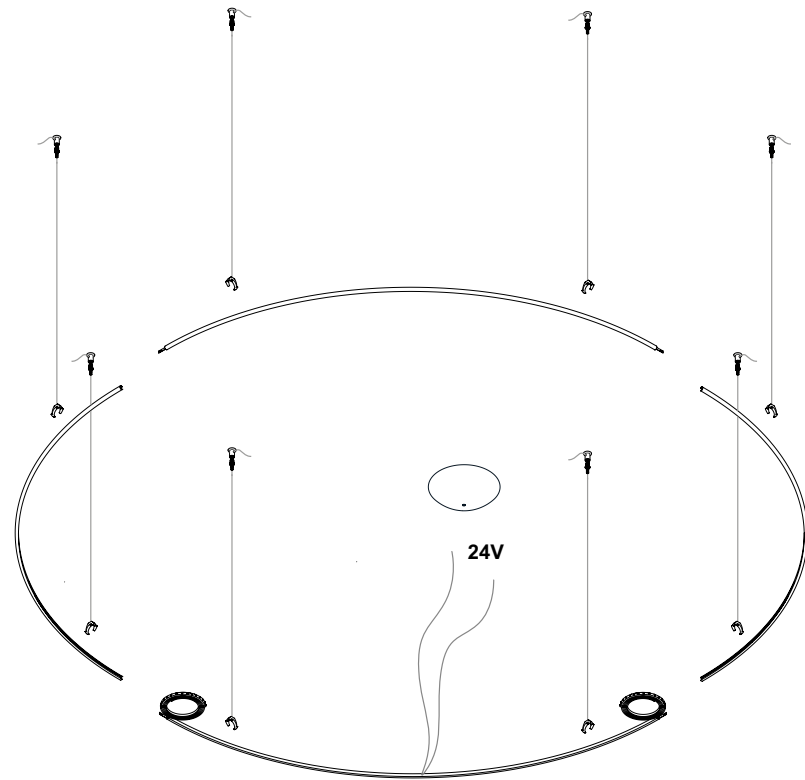

Lancia Tonda System

Design P. Pepere

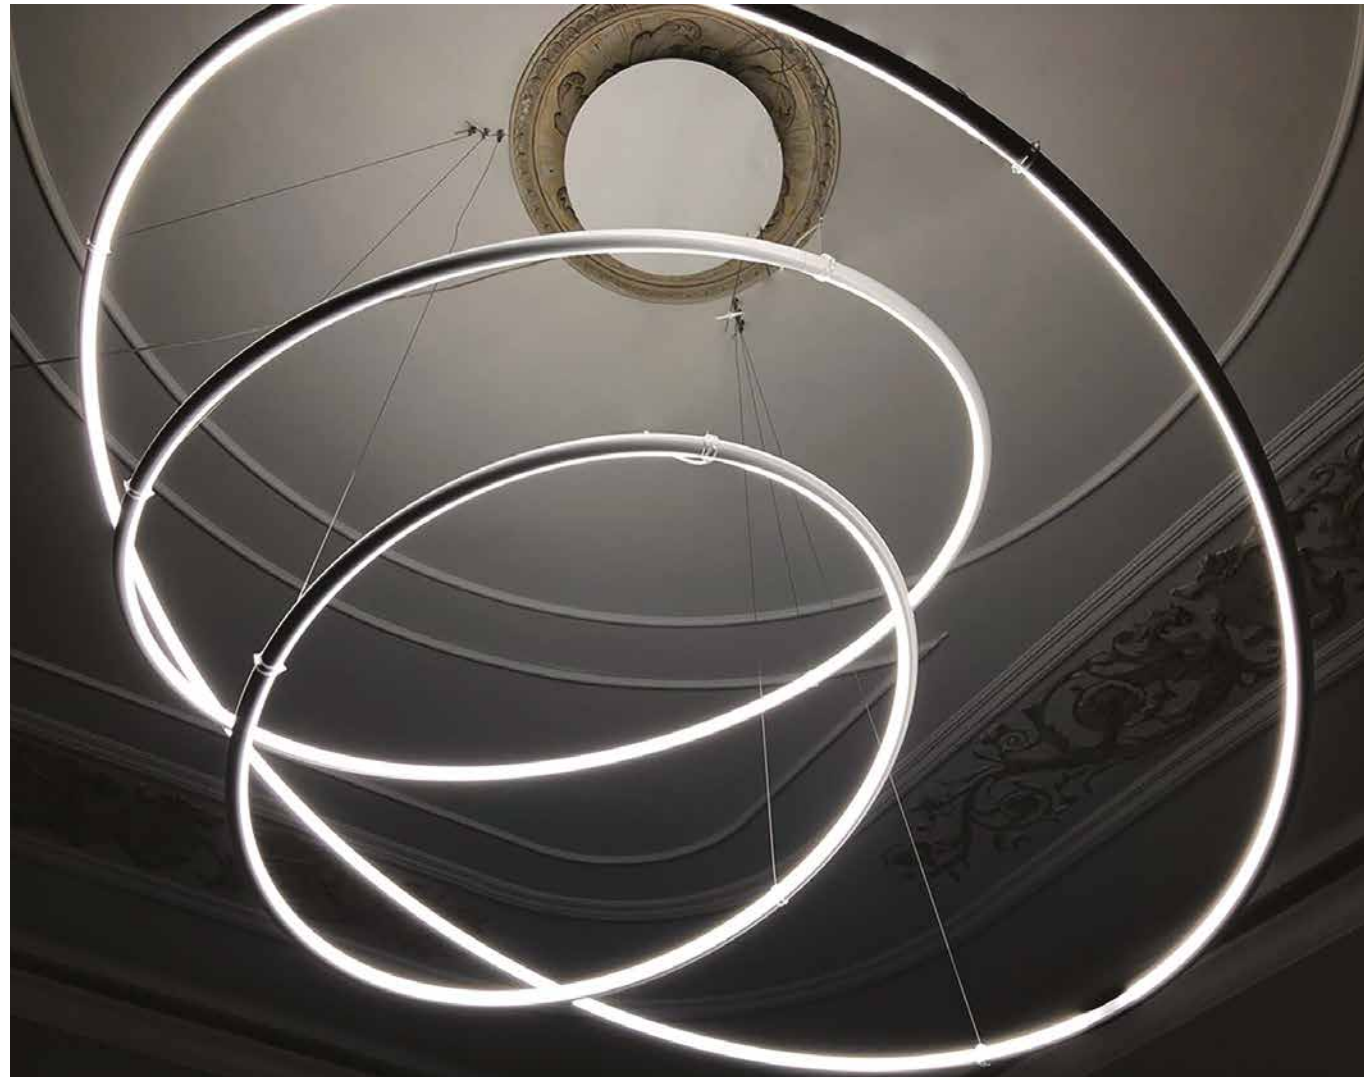



Lancia Tonda System

Design P. Peperè




Lancia Tonda System

Design P. Peperè




Length of electrical cable 98.42"
Longitud del cable eléctrico 98.42"

SINGLE LAMP CABLE KIT / KIT DE CABLE DE LÁMPARA INDIVIDUAL

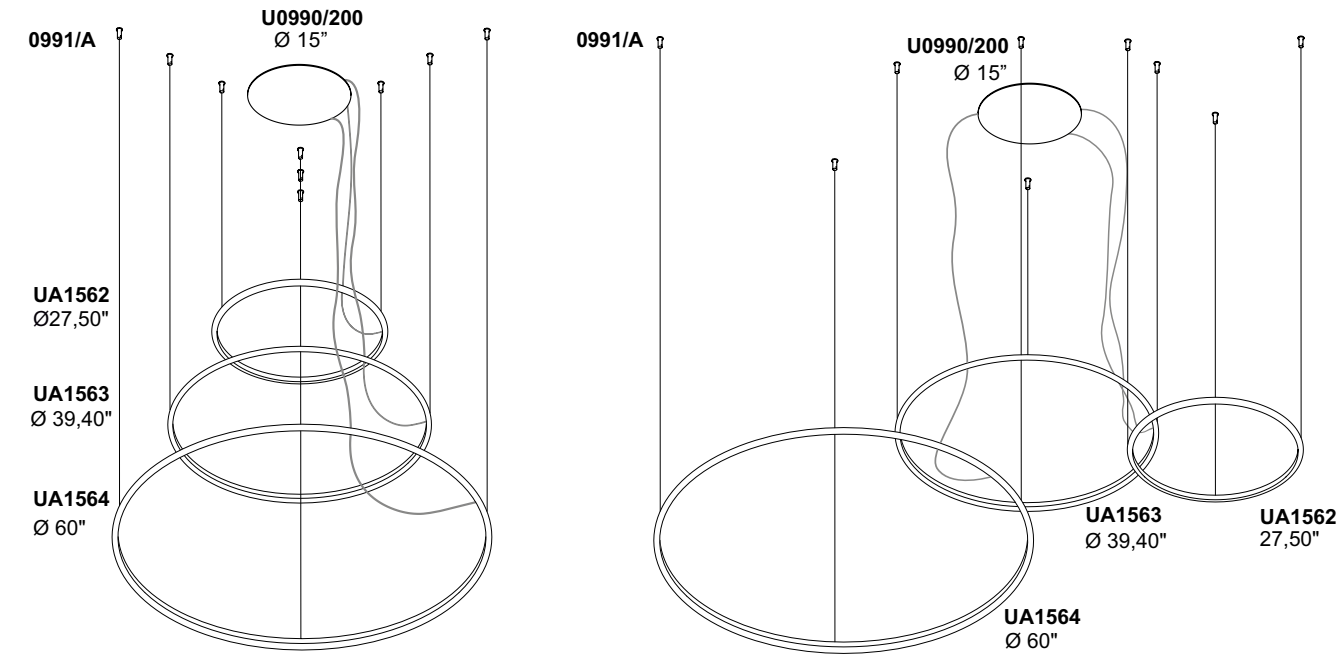

3 LAMPS CABLE KIT / JUEGO DE CABLES DE 3 LÁMPARAS

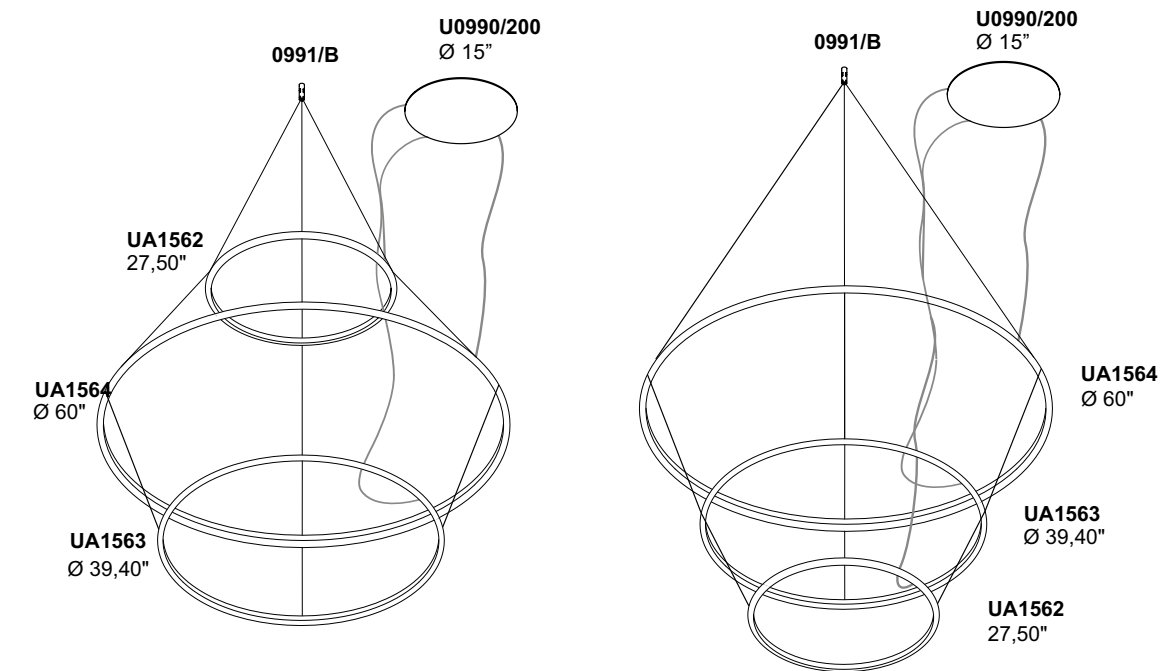

0991/A
Single lamp cable kit
Kit de cable de lámpara individual
3 Steel cables 78.74"
3 Cable retainers.
3 Lamp Holder Clips
3 Cables de acero de 78.74"
3 Retenedores de cables.
3 clips portalámparas


0991/B
Single lamp cable kit
Kit de cable de lámpara individual
3 Steel cables 157.48"
1 Displacement element for cable fixing.
3 Lamp Holder Clips
3 Cables de acero de 157.48"
1 decentrador de cables.
3 clips portalámparas

CUSTOM SIZE

Ø	watt	codice - code	finiture - finishes	2700K	lm	3000K	lm	4000K	lm
19.69"	27W	UA1566	.01 White - Blanco	/XW	2835	/WW	3030	/W	3390
19.69"	27W	UA1566	.02 Black - Negro	/XW	2835	/WW	3030	/W	3390
19.69"	27W	UA1566	.25 Golded satin - Oro satinado	/XW	2835	/WW	3030	/W	3390
19.69"	27W	UA1566	.31 Chromed - Cromado	/XW	2835	/WW	3030	/W	3390
19.69"	27W	UA1566	.85 Painted silver finishing - Plata pintada	/XW	2835	/WW	3030	/W	3390
19.69"	27W	UA1566	.86 Painted gold finishing - Oro pintado	/XW	2835	/WW	3030	/W	3390
19.69"	27W	UA1566	.87 Painted copper finishing - Cobre pintado	/XW	2835	/WW	3030	/W	3390
19.69"	27W	UA1566	.88 Painted bronze finishing - Bronce pintado	/XW	2835	/WW	3030	/W	3390
27.56"	37.8W	UA1562	.01 White - Blanco	/XW	3969	/WW	4242	/W	4746
27.56"	37.8W	UA1562	.02 Black - Negro	/XW	3969	/WW	4242	/W	4746
27.56"	37.8W	UA1562	.25 Golded satin - Oro satinado	/XW	3969	/WW	4242	/W	4746
27.56"	37.8W	UA1562	.31 Chromed - Cromado	/XW	3969	/WW	4242	/W	4746
27.56"	37.8W	UA1562	.85 Painted silver finishing - Plata pintada	/XW	3969	/WW	4242	/W	4746
27.56"	37.8W	UA1562	.86 Painted gold finishing - Oro pintado	/XW	3969	/WW	4242	/W	4746
27.56"	37.8W	UA1562	.87 Painted copper finishing - Cobre pintado	/XW	3969	/WW	4242	/W	4746
27.56"	37.8W	UA1562	.88 Painted bronze finishing - Bronce pintado	/XW	3969	/WW	4242	/W	4746
39.37"	54W	UA1563	.01 White - Blanco	/XW	5670	/WW	6060	/W	6780
39.37"	54W	UA1563	.02 Black - Negro	/XW	5670	/WW	6060	/W	6780
39.37"	54W	UA1563	.85 Painted silver finishing - Plata pintada	/XW	5670	/WW	6060	/W	6780
39.37"	54W	UA1563	.86 Painted gold finishing - Oro pintado	/XW	5670	/WW	6060	/W	6780
39.37"	54W	UA1563	.87 Painted copper finishing - Cobre pintado	/XW	5670	/WW	6060	/W	6780
39.37"	54W	UA1563	.88 Painted bronze finishing - Bronce pintado	/XW	5670	/WW	6060	/W	6780
59.06"	81W	UA1564	.01 White - Blanco	/XW	8505	/WW	9090	/W	10170
59.06"	81W	UA1564	.02 Black - Negro	/XW	8505	/WW	9090	/W	10170
59.06"	81W	UA1564	.85 Painted silver finishing - Plata pintada	/XW	8505	/WW	9090	/W	10170
59.06"	81W	UA1564	.86 Painted gold finishing - Oro pintado	/XW	8505	/WW	9090	/W	10170
59.06"	81W	UA1564	.87 Painted copper finishing - Cobre pintado	/XW	8505	/WW	9090	/W	10170
59.06"	81W	UA1564	.88 Painted bronze finishing - Bronce pintado	/XW	8505	/WW	9090	/W	10170

Suspension fixing kit and ceiling canopies, power supplies separately ordered
El kit de montaje en suspensión y las rosetas con fuentes de alimentación deben pedirse por separado

FINISHES CODES - CÓDIGOS DE ACABADOS

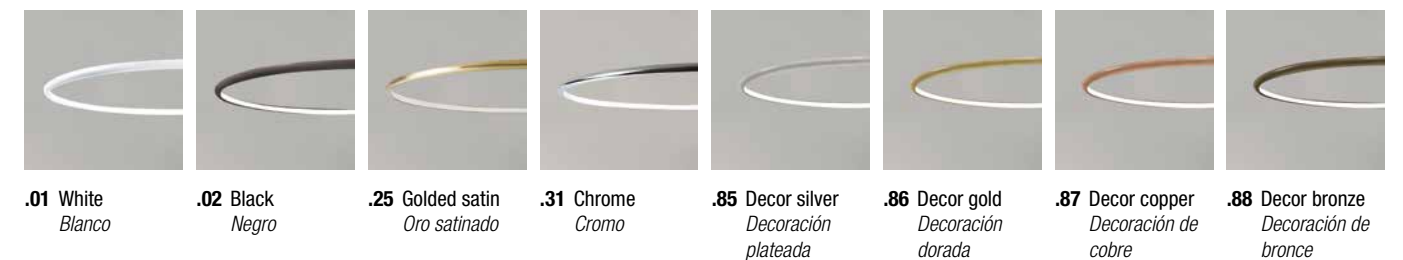


Lancia Tonda System

Design P. Pepere




CEILING ROSES FOR SUSPENSION SYSTEMS 24V / ROSETAS PARA SISTEMAS DE SUSPENSIÓN DE 24V



Canopy complete with 60W driver
Rosetón completa con controlador de 60W


U0990/60 . _ _	1.32 lb
.01 White - Blanco	60 W
.02 Black - Negro	60 W
.85 Painted silver finishing - Plata pintada	60 W
.86 Painted gold finishing - Oro pintado	60 W
.87 Painted copper finishing - Cobre pintado	60 W
.88 Painted bronze finishing - Bronce pintado	60 W



Canopy complete with 99W driver
Rosetón completa con controlador de 99W

U0990/100 . _ _ / _ _	2.87 lb
.01 White - Blanco	99 W
.02 Black - Negro	99 W
.85 Painted silver finishing - Plata pintada	99 W
.86 Painted gold finishing - Oro pintado	99 W
.87 Painted copper finishing - Cobre pintado	99 W
.88 Painted bronze finishing - Bronce pintado	99 W

/P	DIMMER		MAX 75W
/V	DIMMER		MAX 75W
/D	DIMMER		MAX 75W



Canopy complete with driver 198W
Roseta completa con driver de 198W

U0990/200 . _ _ / _ _	4.41 lb
.01 White - Blanco	198 W
.02 Black - Negro	198 W
.85 Painted silver finishing - Plata pintada	198 W
.86 Painted gold finishing - Oro pintado	198 W
.87 Painted copper finishing - Cobre pintado	198 W
.88 Painted bronze finishing - Bronce pintado	198 W

/P	DIMMER		MAX 2x75W
/V	DIMMER		MAX 2x75W
/D	DIMMER		MAX 2x75W



Lancia Tonda

Design P. Peperè




Lancia Tonda

Design P. Pepere




With push dimm on cable
Completo de cable Push dimm

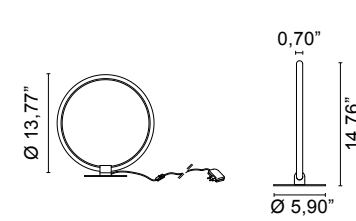

U2513... / ... 1.54 lb

- .01** White - Blanco
- .02** Black - Negro
- .25** Golded satin - Oro satinado
- .31** Chromed - Cromado

/W	4000K	LED 9,6W CRI>90	1080lm
/WW	3000K	LED 9,6W CRI>90	1020lm
/XW	2700K	LED 9,6W CRI>90	960lm

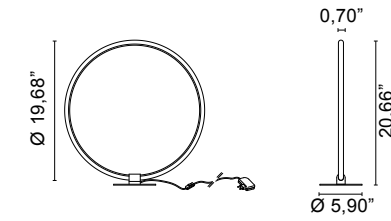

U2514... / ... 2.20 lb

- .01** White - Blanco
- .02** Black - Negro
- .25** Golded satin - Oro satinado
- .31** Chromed - Cromado

/W	4000K	LED 14W CRI>90	1620lm
/WW	3000K	LED 14W CRI>90	1530lm
/XW	2700K	LED 14W CRI>90	1440lm



FINISHES CODES - CÓDIGOS DE ACABADOS




- .01** White
Blanco
- .02** Black
Negro
- .25** Golded satin
Oro satinado
- .31** Chrome
Cromo

Lancia Tonda

Design P. Peperè




With push dimm on cable
Completo de cable Push dimm

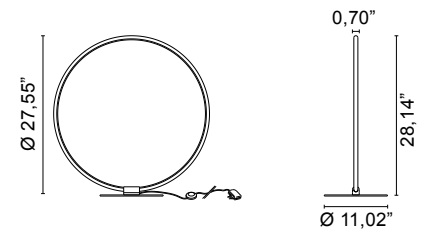

U3513. / / 4.41 lb

- .01** White - Blanco
- .02** Black - Negro
- .25** Golded satin - Oro satinado
- .31** Chromed - Cromado


/W	4000K	LED 20W CRI>90	2268lm
/WW	3000K	LED 20W CRI>90	2142lm
/XW	2700K	LED 20W CRI>90	2016lm

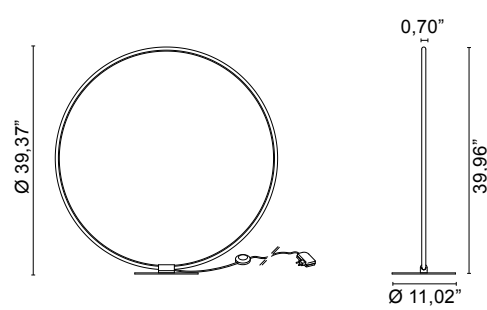

U3514. / / 8.60 lb

- .01** White - Blanco
- .02** Black - Negro

/W	4000K	LED 29W CRI>90	3240lm
/WW	3000K	LED 29W CRI>90	3060lm
/XW	2700K	LED 29W CRI>90	2880lm

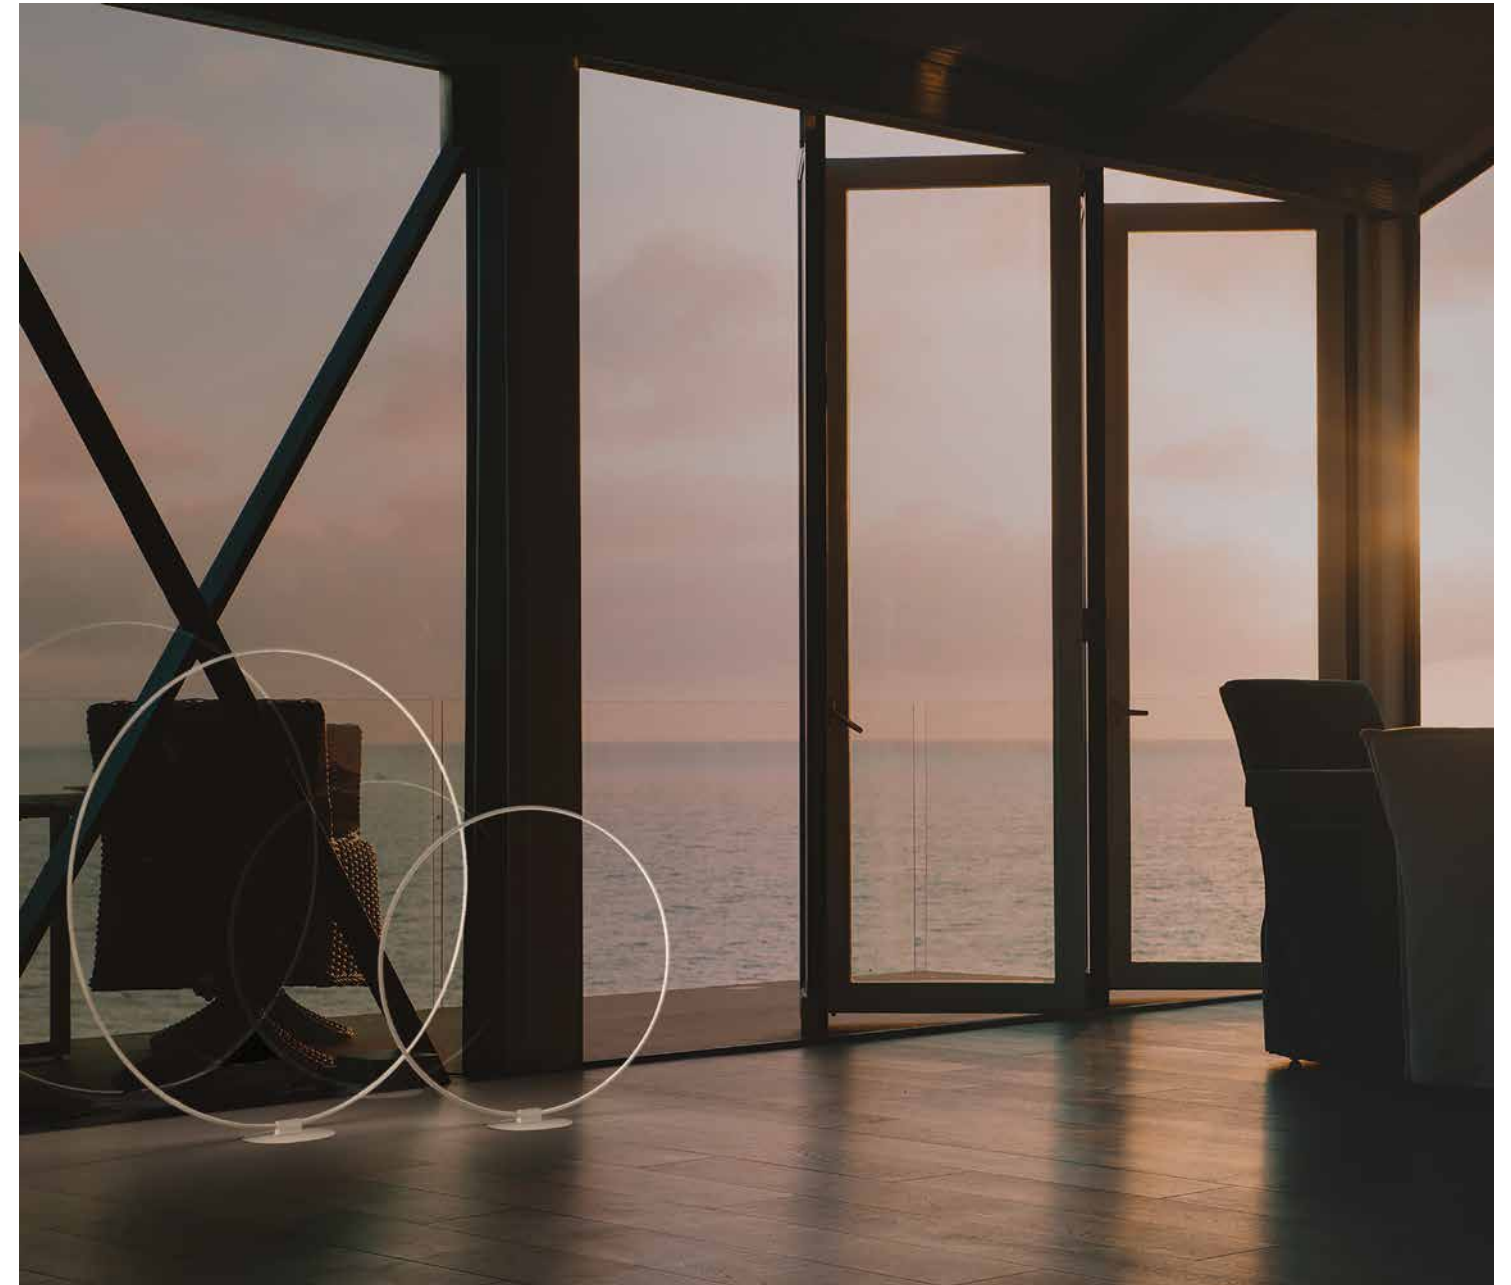

FINISHES CODES - CÓDIGOS DE ACABADOS



- .01** White
Blanco
- .02** Black
Negro
- .25** Golded satin
Oro satinado
- .31** Chrome
Cromo



Lancia

Design P. Peperè



Lancia


Design P. Pepere

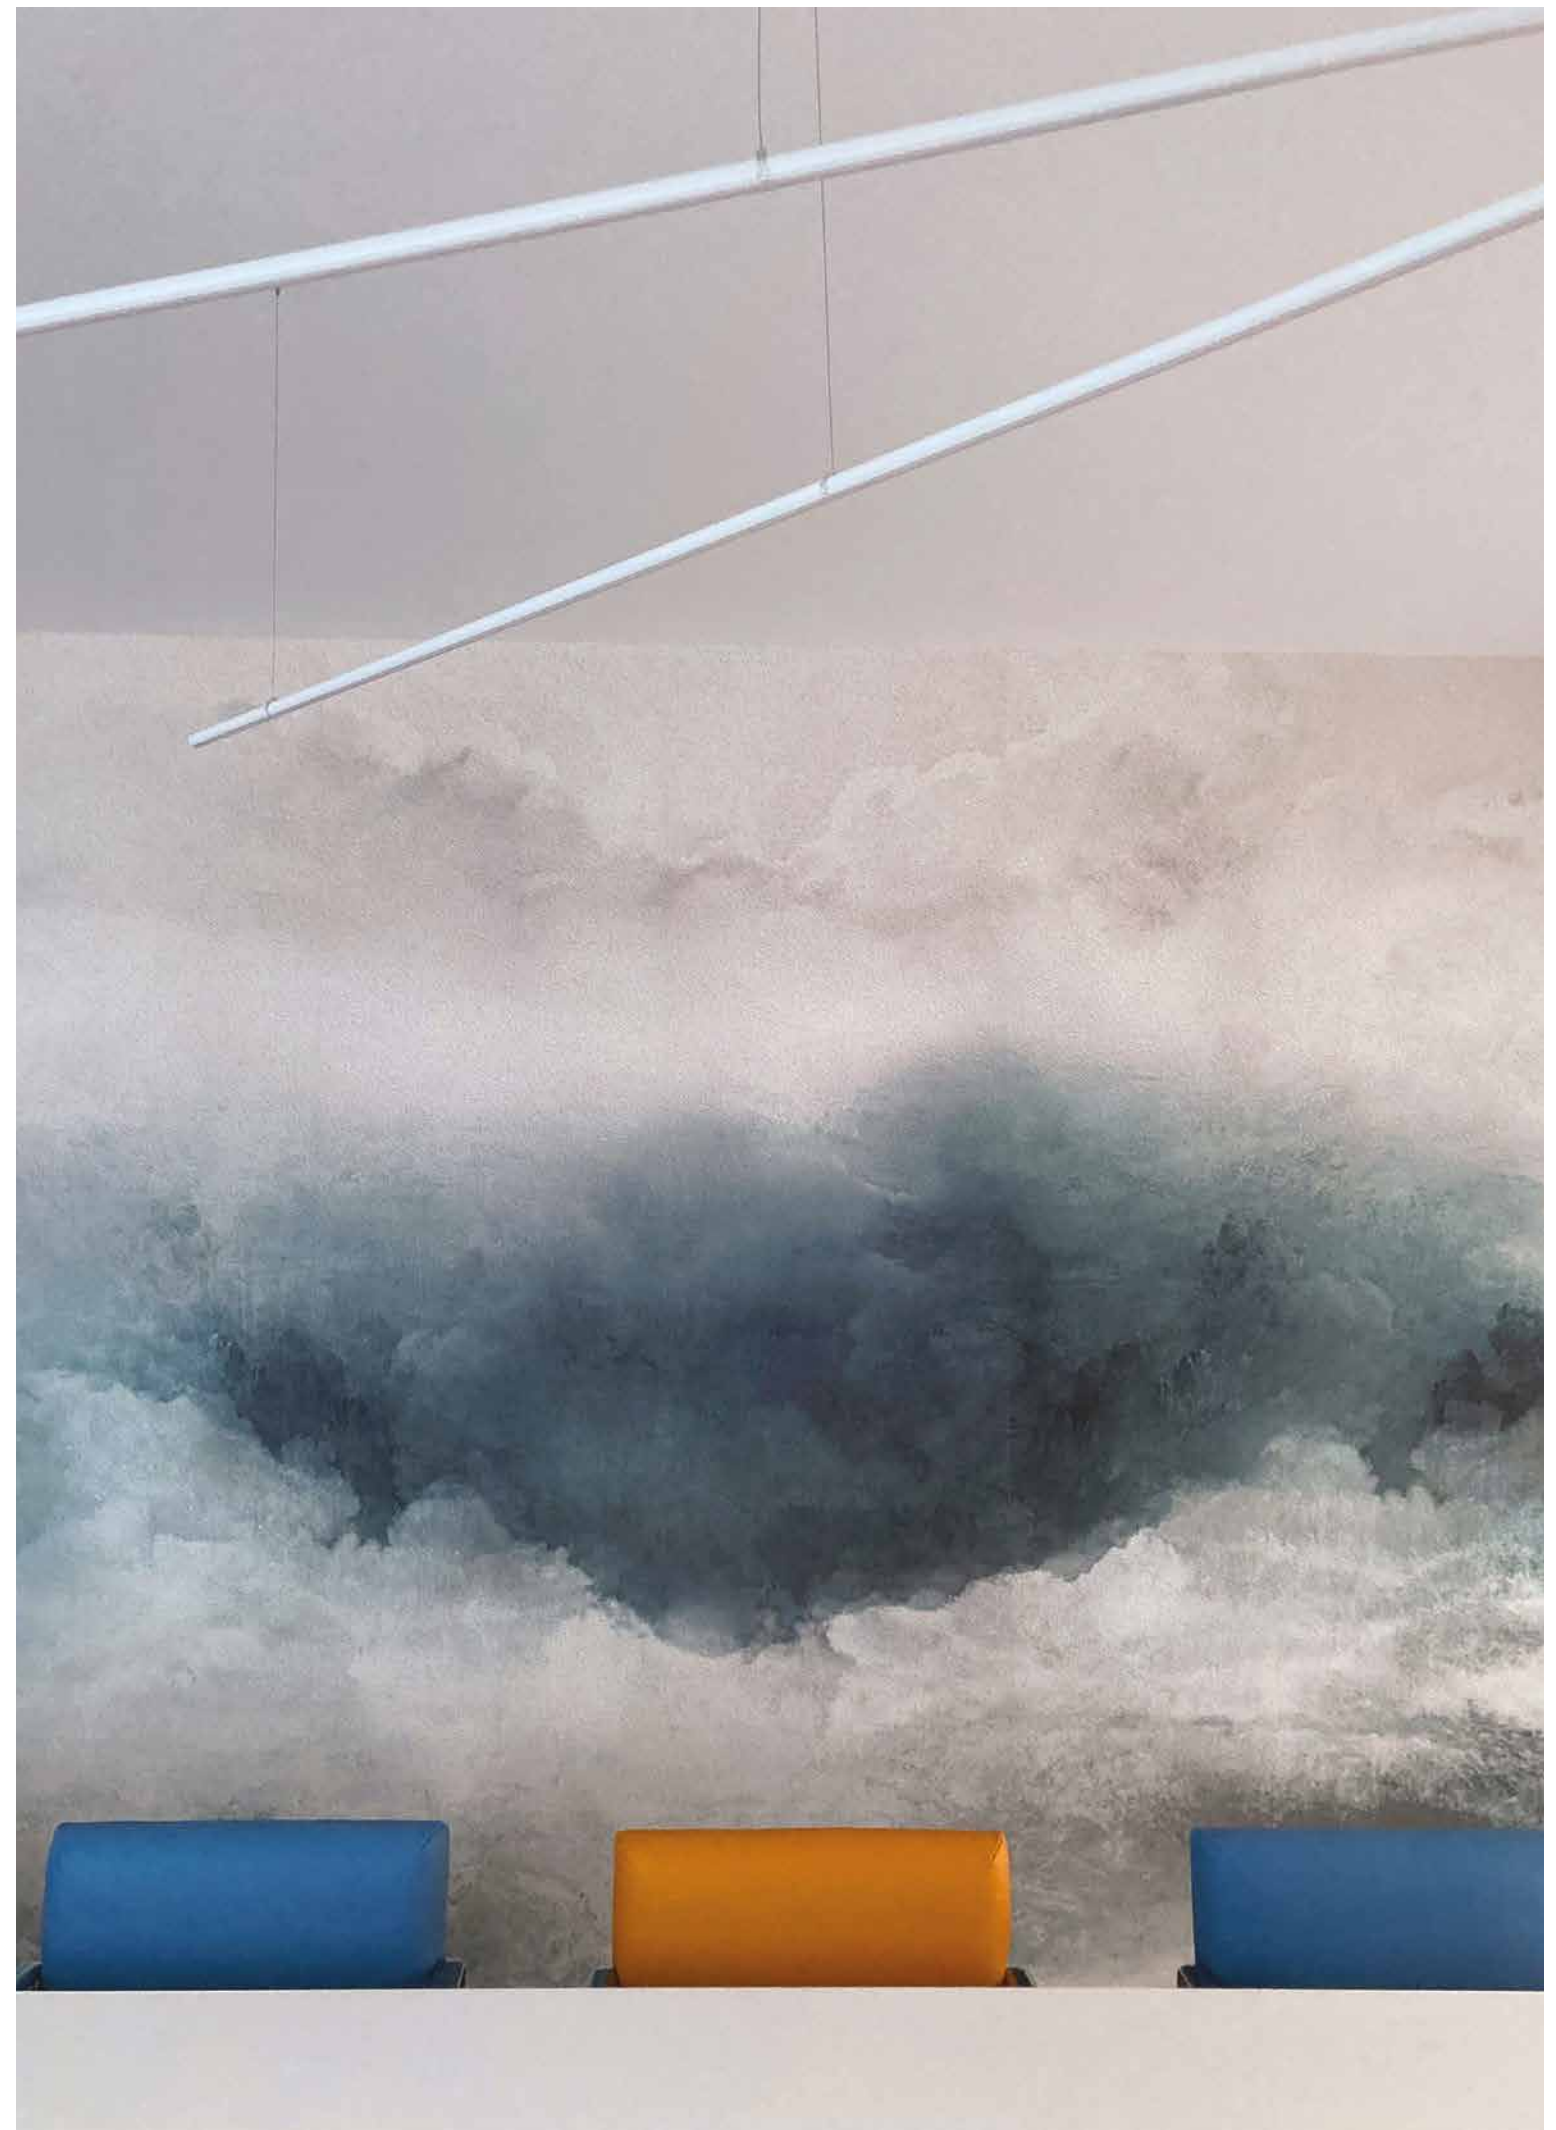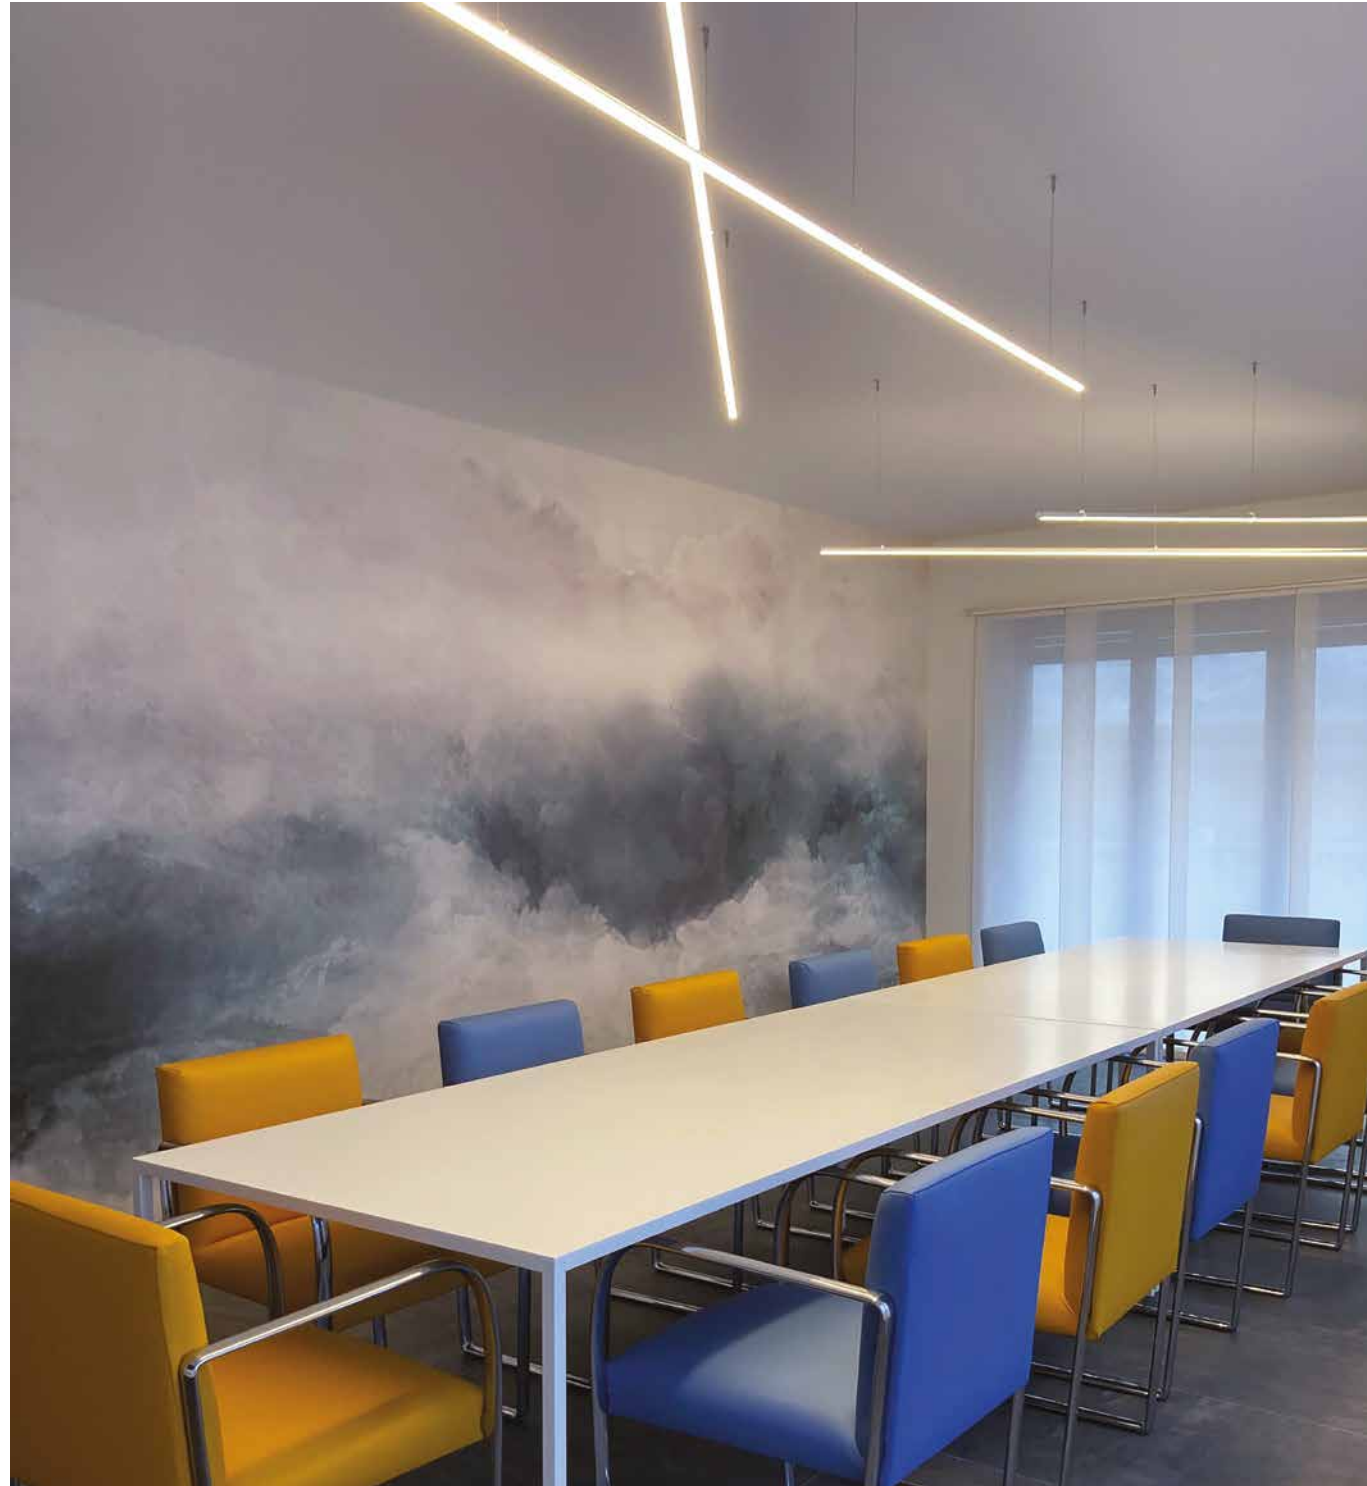



Lancia

Design P. Pepere

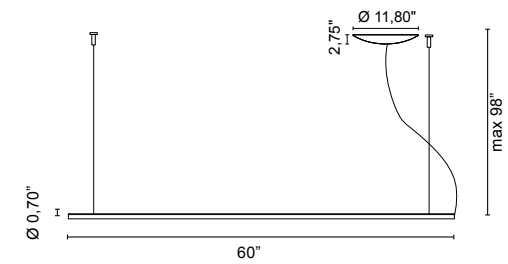

U1540. _/_/_ 2.43 lb

- .01** White - Blanco
- .02** Black - Negro
- .85** Painted silver finishing - Plata pintada
- .86** Painted gold finishing - Oro pintado
- .87** Painted copper finishing - Cobre pintado
- .88** Painted bronze finishing - Bronce pintado

/W	4000K	LED 27W CRI>90	3390lm
/WW	3000K	LED 27W CRI>90	3030lm
/XW	2700K	LED 27W CRI>90	2835lm



CUSTOM SIZE

Table of available lengths on request.
 Tabla de longitudes disponible previa solicitud.

inches	watt	2700K (XW)	lm	3000K (WW)	lm	4000K (W)	lm
40.16"	18W	U1540.01/100/XW	1890	U1540.01/100/WW	2020	U1540.01/100/W	2260
50.00"	22.5W	U1540.01/125/XW	2362	U1540.01/125/WW	2525	U1540.01/125/W	2825
59.84"	27W	U1540.01/150/XW	2835	U1540.01/150/WW	3030	U1540.01/150/W	3390
69.69"	31.5W	U1540.01/175/XW	3307	U1540.01/175/WW	3535	U1540.01/175/W	3955
79.53"	36W	U1540.01/200/XW	3780	U1540.01/200/WW	4040	U1540.01/200/W	4520
89.37"	40.5W	U1540.01/225/XW	4252	U1540.01/225/WW	4545	U1540.01/225/W	5085
99.21"	45W	U1540.01/250/XW	4725	U1540.01/250/WW	5050	U1540.01/250/W	5650

FINISHES CODES - CÓDIGOS DE ACABADOS



- .01** White
Blanco
- .02** Black
Negro
- .85** Painted silver
finishing
Plata pintada
- .86** Painted gold
finishing
Oro pintado
- .87** Painted copper
finishing
Cobre pintado
- .88** Painted bronze
finishing
Bronce pintado

Lancia System



Design P. Pepere




CUSTOM SIZE

Table of available lengths on request.
Tabla de longitudes disponible previa solicitud.

inches	watt	2700K (XW)	lm	3000K (WW)	lm	4000K (W)	lm
40.16"	18W	UA1539.01/100/XW	1890	UA1539.01/100/WW	2020	UA1539.01/100/W	2260
50.00"	22.5W	UA1539.01/125/XW	2362	UA1539.01/125/WW	2525	UA1539.01/125/W	2825
59.84"	27W	UA1539.01/XW *	2835	UA1539.01/WW *	3030	UA1539.01/W *	3390
69.69"	31.5W	UA1539.01/175/XW	3307	UA1539.01/175/WW	3535	UA1539.01/175/W	3955
79.53"	36W	UA1539.01/200/XW	3780	UA1539.01/200/WW	4040	UA1539.01/200/W	4520
89.37"	40.5W	UA1539.01/225/XW	4252	UA1539.01/225/WW	4545	UA1539.01/225/W	5085
99.21"	45W	UA1539.01/250/XW	4725	UA1539.01/250/WW	5050	UA1539.01/250/W	5650

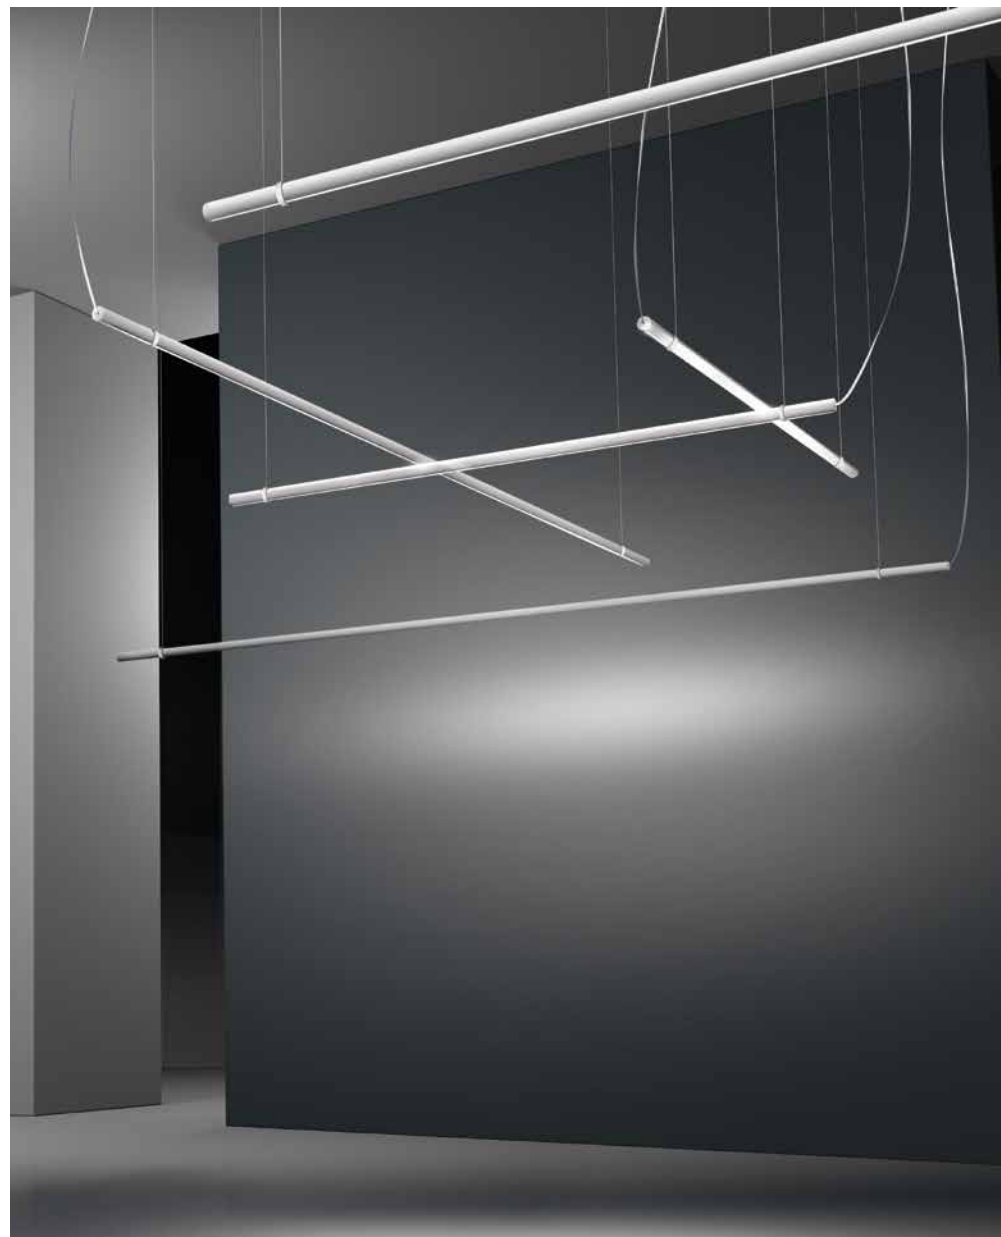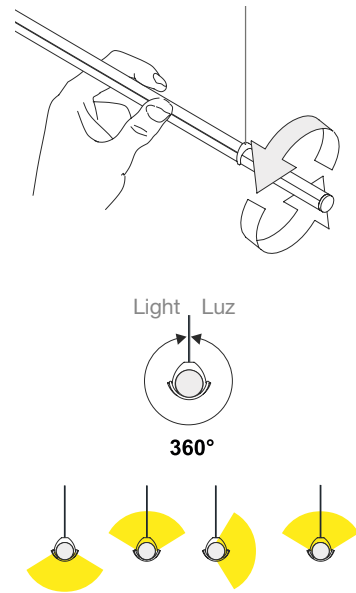


CEILING ROSES FOR SUSPENSION SYSTEMS 24V ROSETAS PARA SISTEMAS DE SUSPENSIÓN DE 24V



Canopy complete with 60W driver
Rosetón completa con controlador de 60W


U0990/60 . _ _	1.32 lb
.01 White - Blanco	60 W
.02 Black - Negro	60 W
.85 Painted silver finishing - Plata pintada	60 W
.86 Painted gold finishing - Oro pintado	60 W
.87 Painted copper finishing - Cobre pintado	60 W
.88 Painted bronze finishing - Bronce pintado	60 W



Canopy complete with 99W driver
Rosetón completa con controlador de 99W

U0990/100 . _ _ / _ _	2.87 lb
.01 White - Blanco	99 W
.02 Black - Negro	99 W
.85 Painted silver finishing - Plata pintada	99 W
.86 Painted gold finishing - Oro pintado	99 W
.87 Painted copper finishing - Cobre pintado	99 W
.88 Painted bronze finishing - Bronce pintado	99 W

/P DIMMER		MAX 75W
/V DIMMER		MAX 75W
/D DIMMER		MAX 75W



Canopy complete with driver 198W
Roseta completa con driver de 198W


U0990/200 . _ _ / _ _	4.41 lb
.01 White - Blanco	198 W
.02 Black - Negro	198 W
.85 Painted silver finishing - Plata pintada	198 W
.86 Painted gold finishing - Oro pintado	198 W
.87 Painted copper finishing - Cobre pintado	198 W
.88 Painted bronze finishing - Bronce pintado	198 W

/P DIMMER		MAX 2x75W
/V DIMMER		MAX 2x75W
/D DIMMER		MAX 2x75W



Lancia System

Design P. Pepere

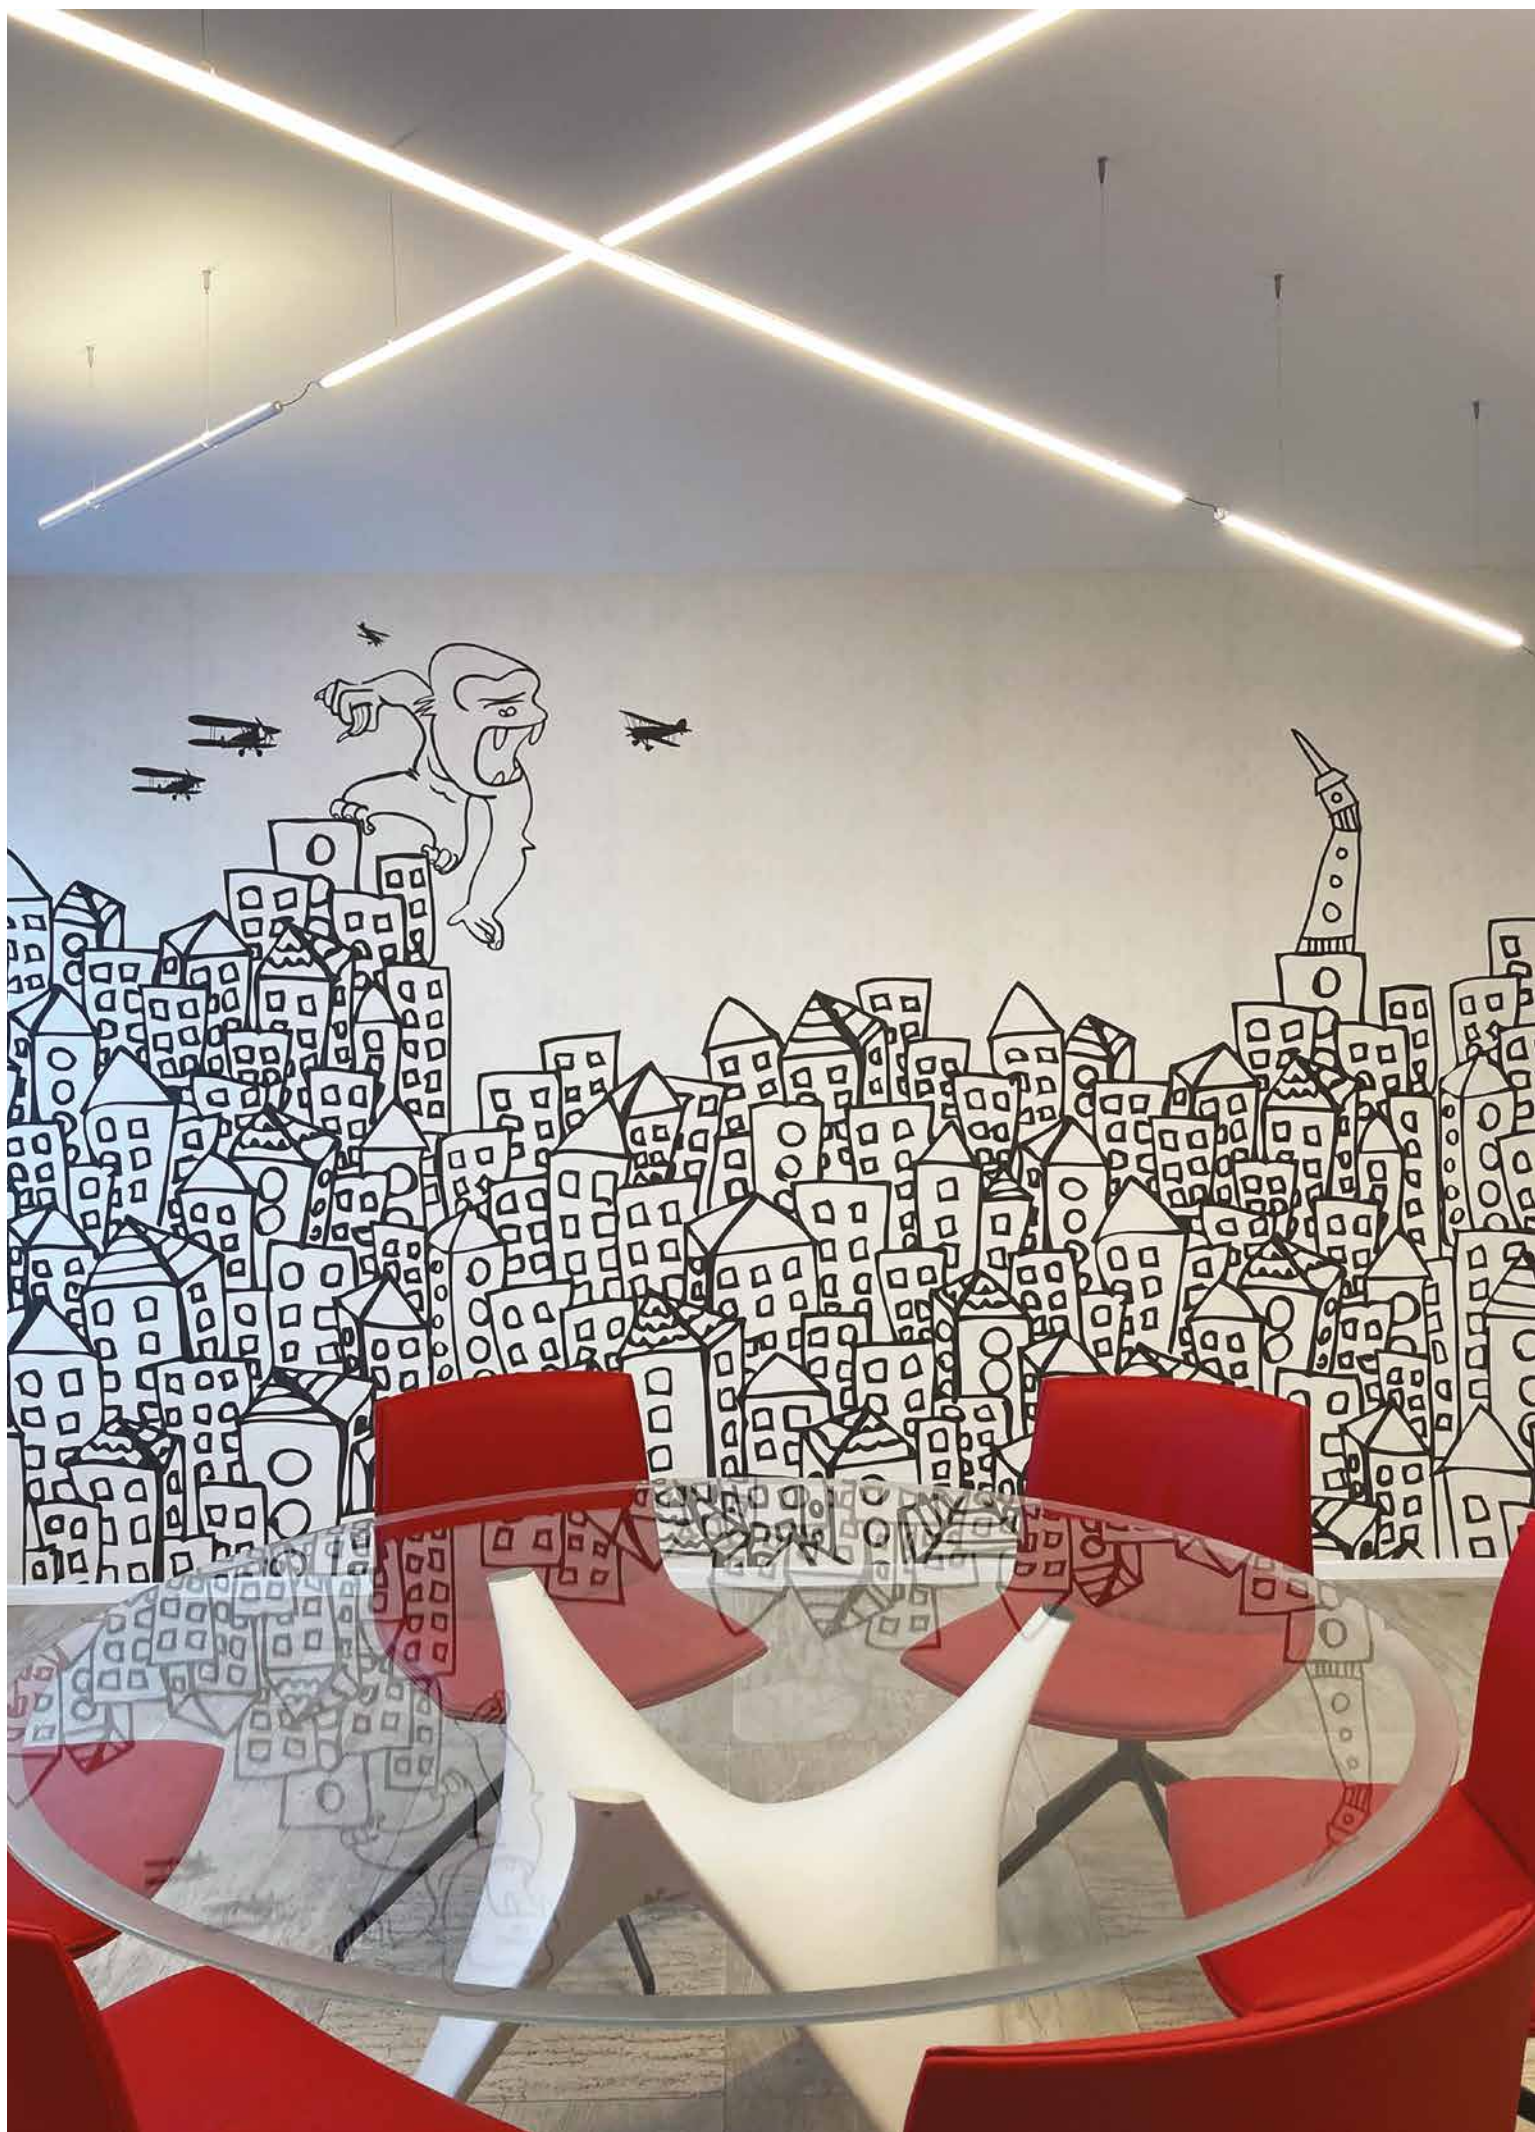

Lancia no limits

Design Lux Studio




Lancia no limits

Design Lux Studio



Without canopy/driver
Sin roseta/conductor

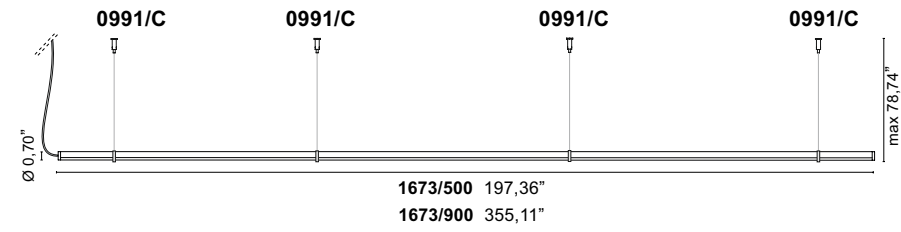

Suspension fixing kit and ceiling canopies, power supplies separately ordered
El kit de montaje en suspensión y las rosetas con fuentes de alimentación deben pedirse por separado

U1673._ _ / 500 / _			U1673._ _ / 900 / _				
9.26 lb			13.89 lb				
.01	White - Blanco		.01	White - Blanco			
.02	Black - Negro		.02	Black - Negro			
/W	4000K	LED 60W CRI>90	9200lm	/W	4000K	LED 108W CRI>90	16560lm
/WW	3000K	LED 60W CRI>90	8250lm	/WW	3000K	LED 108W CRI>90	14850lm
/XW	2700K	LED 60W CRI>90	7800lm	/XW	2700K	LED 108W CRI>90	14040lm



ACCESSORIES ACCESORIOS



Single lamp cable kit
1 Steel cable 78,74"
1 Element for cable fixing
1 Suspension clip
Kit de cable de lámpara individual
1 Cable de acero de 78,74"
1 Desenroscador para fijación de cables
1 Pinza portalámparas




Ceiling fixing clip
Clips de fijación al techo

0991/C

0093

FINISHES CODES - CÓDIGOS DE ACABADOS



.01 White
Blanco

.02 Black
Negro




Lancia no limits

Design Lux Studio




CEILING ROSES FOR SUSPENSION SYSTEMS 24V / ROSETAS PARA SISTEMAS DE SUSPENSIÓN DE 24V



Canopy complete with 60W driver
Rosetón completa con controlador de 60W


U0990/60 . _ _	Weight
.01 White - Blanco	60 W
.02 Black - Negro	60 W
.85 Painted silver finishing - Plata pintada	60 W
.86 Painted gold finishing - Oro pintado	60 W
.87 Painted copper finishing - Cobre pintado	60 W
.88 Painted bronze finishing - Bronce pintado	60 W



Canopy complete with 99W driver
Rosetón completa con controlador de 99W

U0990/100 . _ _ / _ _	Weight
.01 White - Blanco	99 W
.02 Black - Negro	99 W
.85 Painted silver finishing - Plata pintada	99 W
.86 Painted gold finishing - Oro pintado	99 W
.87 Painted copper finishing - Cobre pintado	99 W
.88 Painted bronze finishing - Bronce pintado	99 W


/P DIMMER		MAX 75W
/V DIMMER		MAX 75W
/D DIMMER		MAX 75W



Canopy complete with driver 198W
Roseta completa con driver de 198W


U0990/200 . _ _ / _ _	Weight
.01 White - Blanco	198 W
.02 Black - Negro	198 W
.85 Painted silver finishing - Plata pintada	198 W
.86 Painted gold finishing - Oro pintado	198 W
.87 Painted copper finishing - Cobre pintado	198 W
.88 Painted bronze finishing - Bronce pintado	198 W

/P DIMMER		MAX 2x75W
/V DIMMER		MAX 2x75W
/D DIMMER		MAX 2x75W

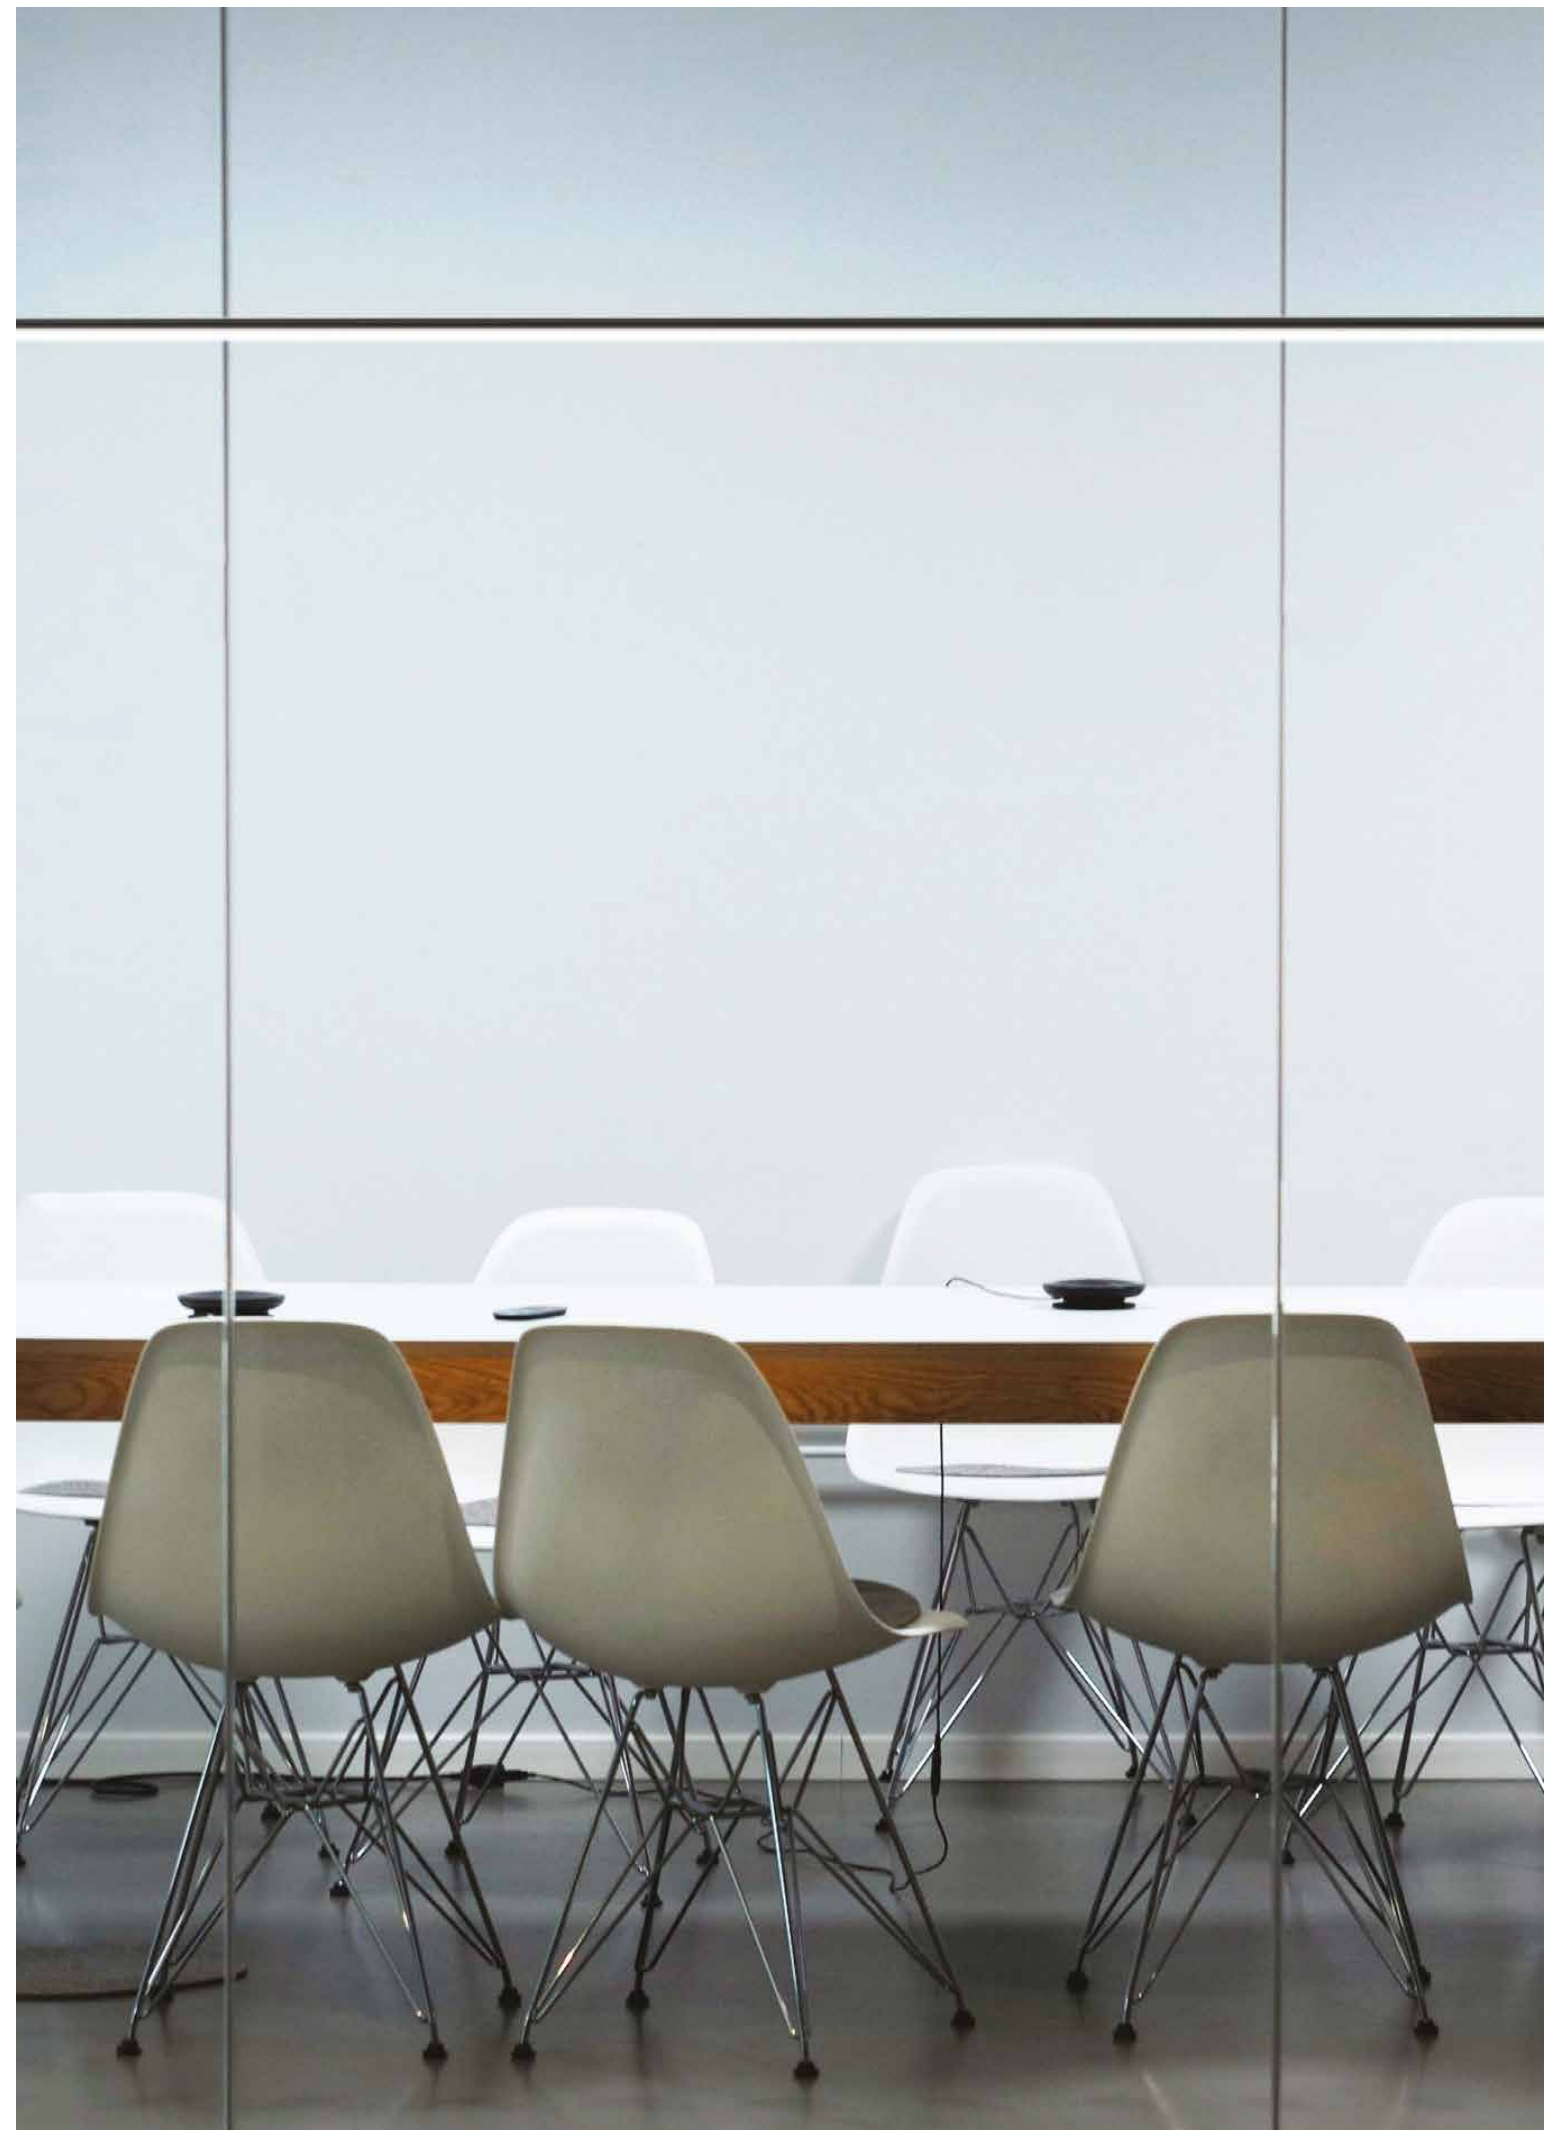


Lancia di Achille

Design P. Peperè

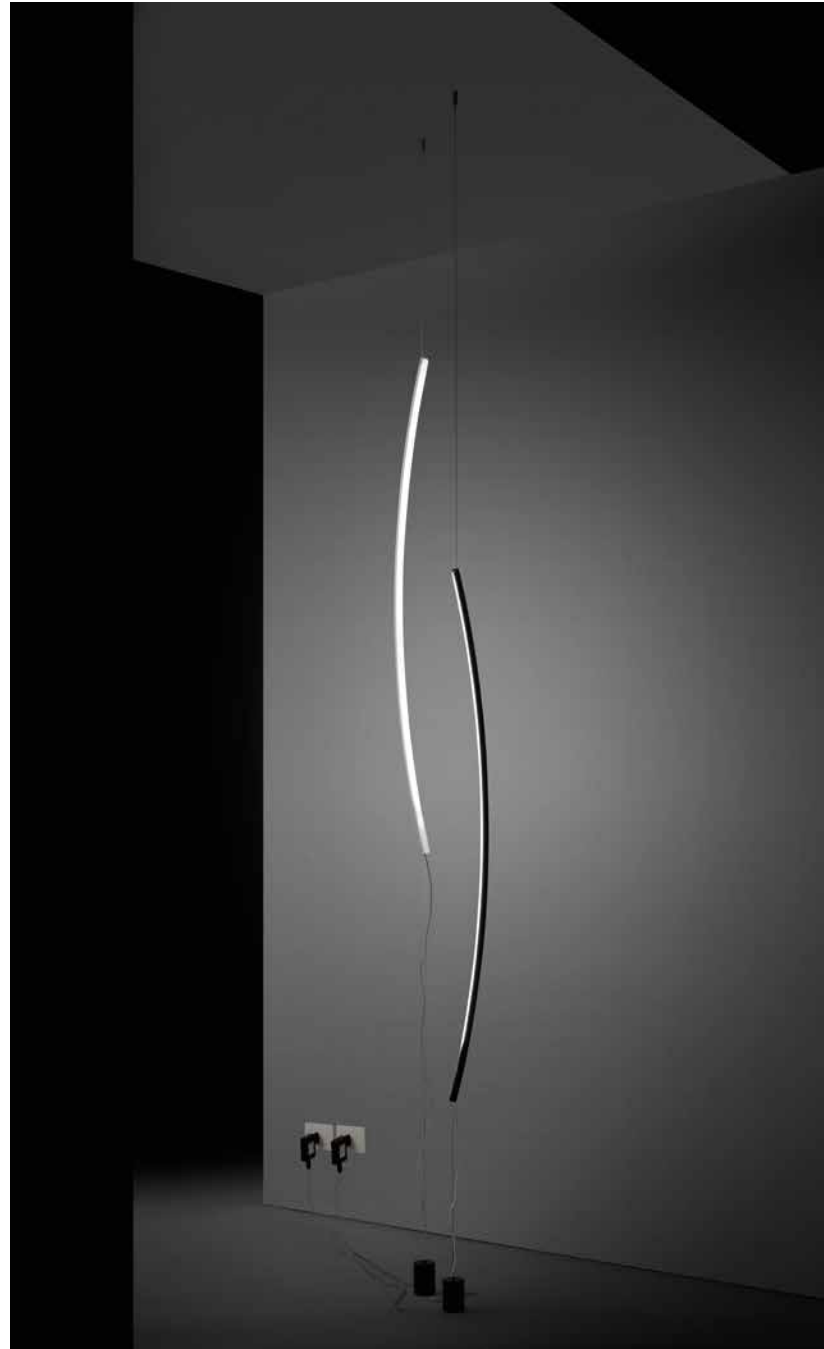

Lancia di Achille

Design P. Peperè


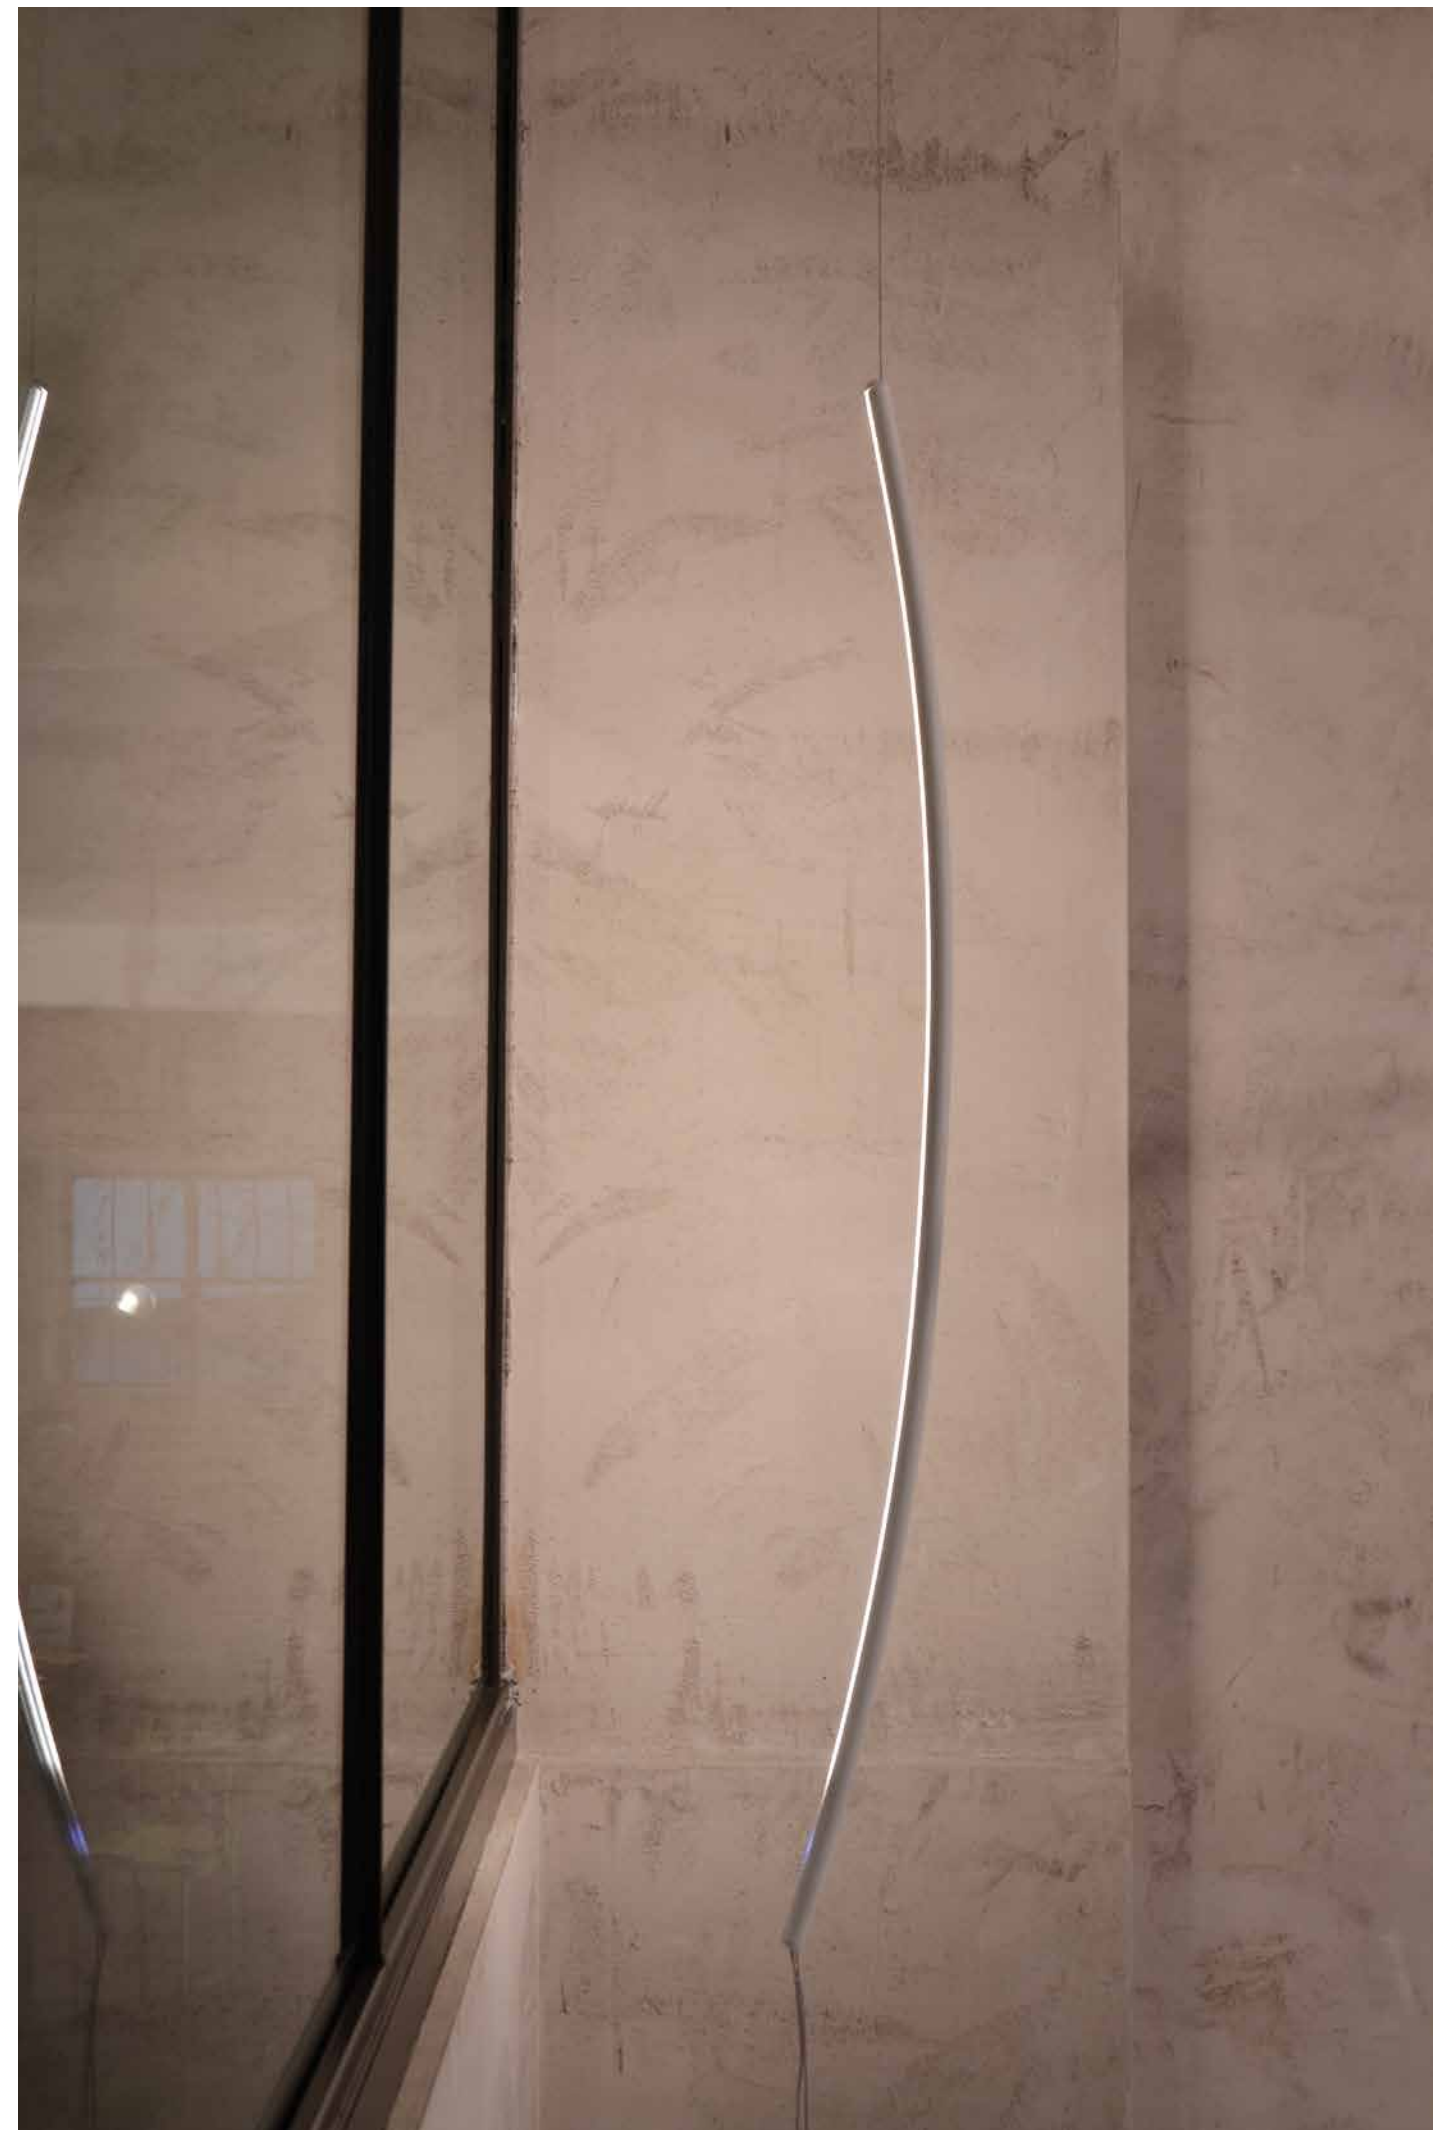


Lancia di Achille

Design P. Peperè



Touch dimmer switch included
Con regulador de intensidad táctil

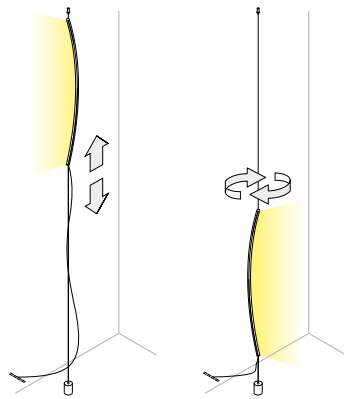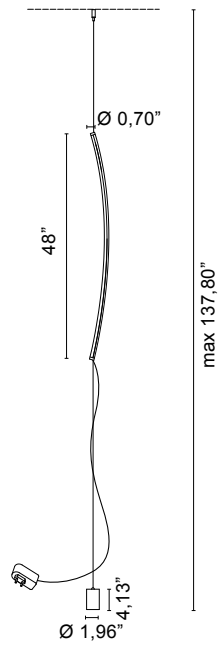

U1567... / ... 6.17 lb

.01 White - Blanco

.02 Black - Negro

.31 Chromed - Cromado



/W 4000K LED 19,5W CRI>90 2486lm

/WW 3000K LED 19,5W CRI>90 2222lm

/XW 2700K LED 19,5W CRI>90 2079lm



FINISHES CODES - CÓDIGOS DE ACABADOS



.01 White
Blanco

.02 Black
Negro

.31 Chrome
Cromo

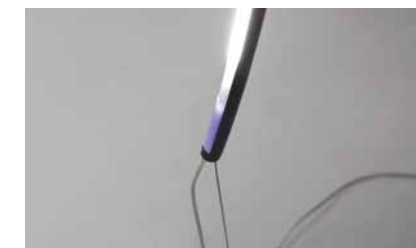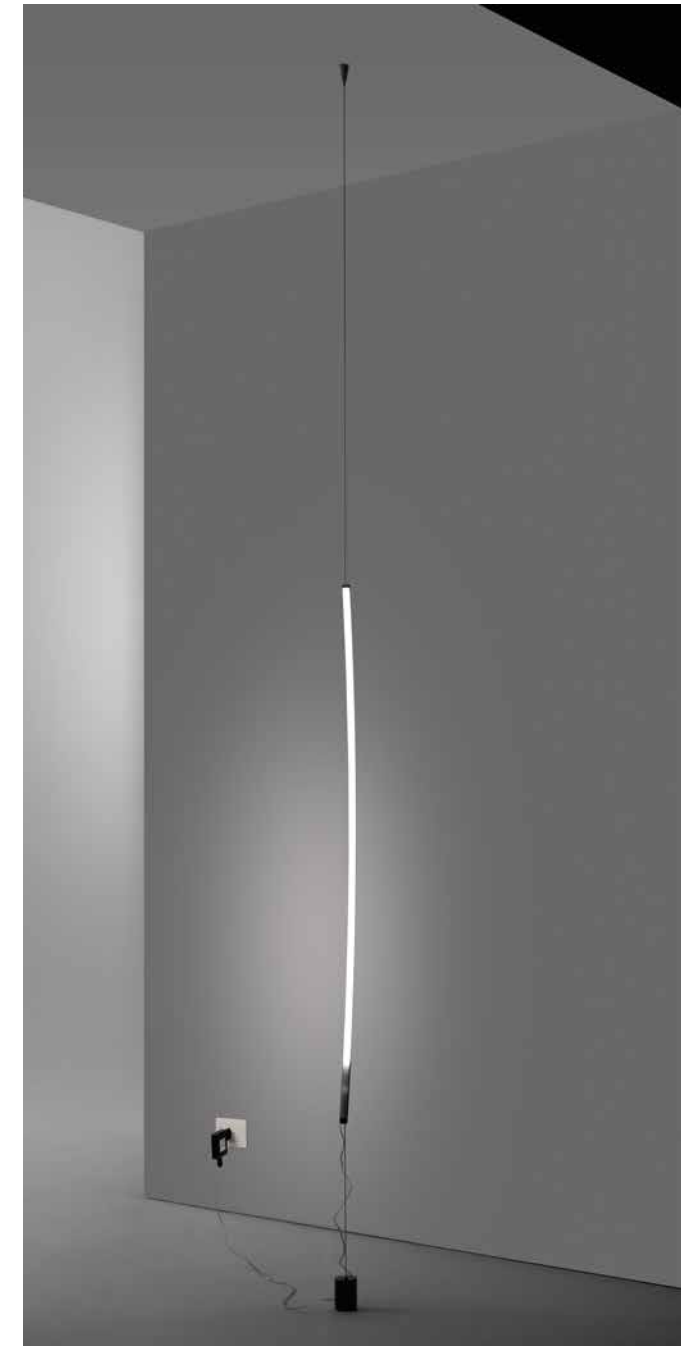

The dimmer-switch with memory is integrated in the stem.
El regulador de intensidad táctil con memoria está integrado en el perfil.



The counterweight maintains the lamp in the desired position.
El contrapeso permite colocar la lámpara en el lugar deseado.

INDOOR

Matita

Design Mati



The Matita collection features a slender aluminium profile with a high-efficiency LED micro-circuit and is part of a family that contains suspension, table, ceiling, floor, and wall lamps. The uniqueness of the joints allows the profiles to move freely, creating light solutions that seem to cut the wall into two sections, capable of achieving up to two and a half meters in height that can redefine the space. The surprising result that EgoLuce accomplished with Matita is the creation of design objects that are functional tools used to “draw with light” and redefine the environment.

La colección Matita se caracteriza por un fino perfil de aluminio con un microcircuito LED de alta eficiencia y forma parte de una familia que incluye lámparas colgantes, de mesa, de pared, de pie y de sobremesa. La singularidad de las juntas permite que los perfiles se muevan libremente, creando soluciones de iluminación que parecen cortar la pared en dos secciones, capaces de alcanzar hasta dos metros y medio de altura y redefinir el espacio. El sorprendente resultado que EgoLuce ha conseguido con Matita es la creación de objetos de diseño que son herramientas funcionales utilizadas para “dibujar con la luz” y redefinir el entorno.



Matita

Design Mati



EXAMPLES OF MULTIPLE INSTALLATION EJEMPLOS DE INSTALACIÓN MÚLTIPLE

Examples of multiple installation, the choice of the ceiling rose depends on total power consumption.
Ejemplos de instalación múltiple, la elección de la roseta viene determinada por la suma de las potencias de las lámparas individuales.

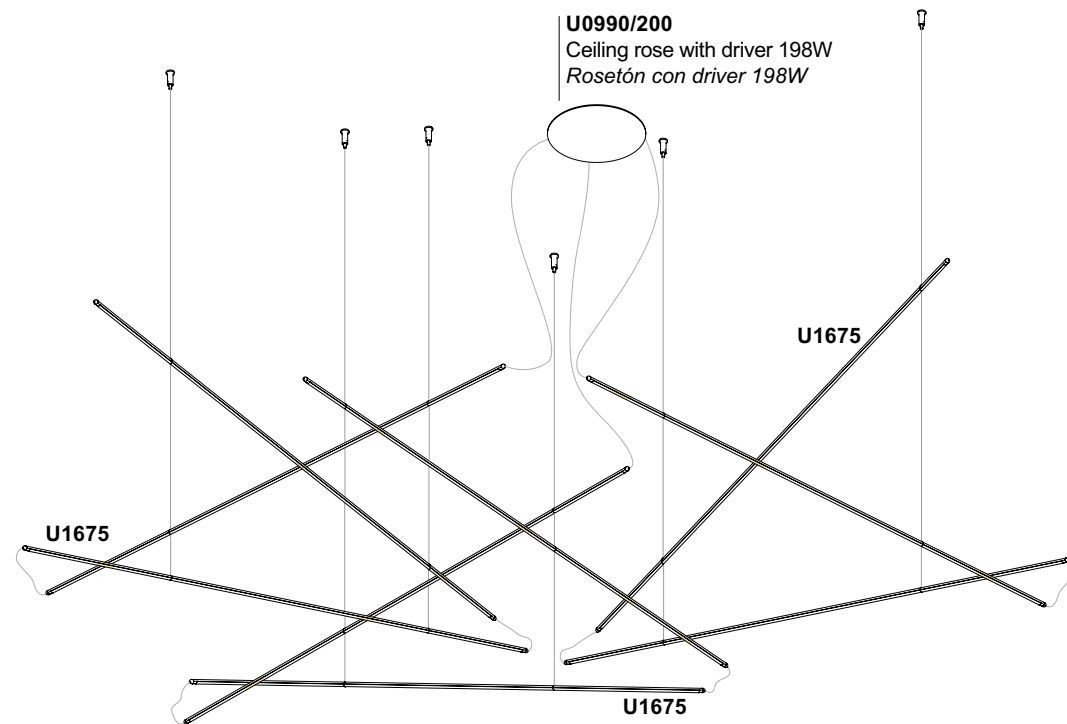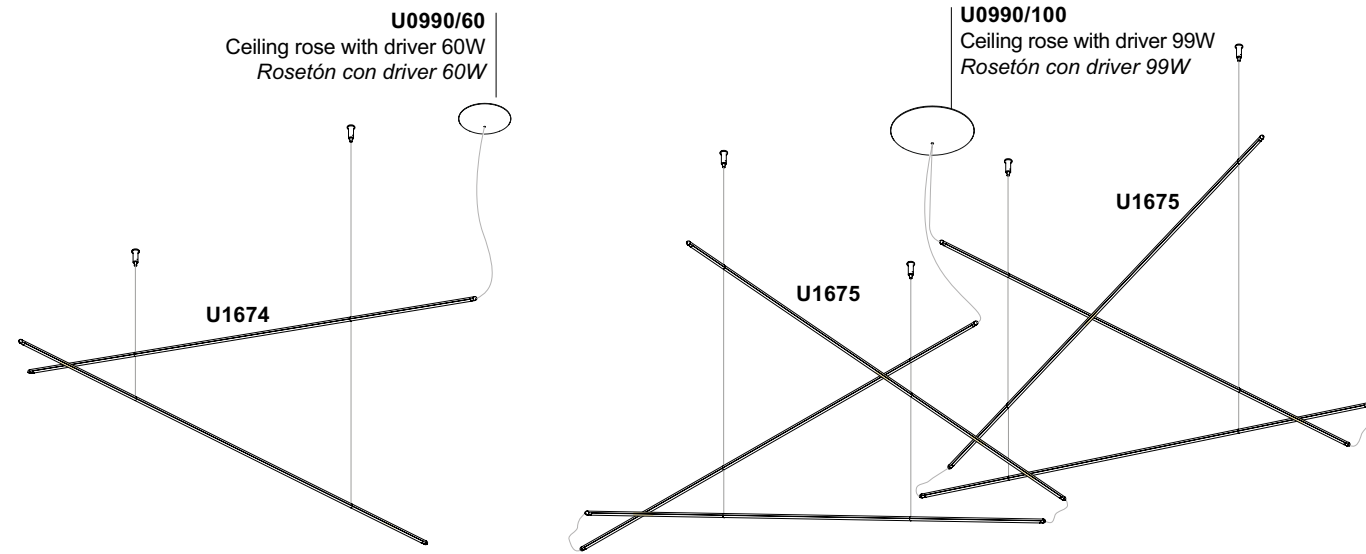




Matita

Design Mati

Without canopy/driver
 Sin roseta/conductor

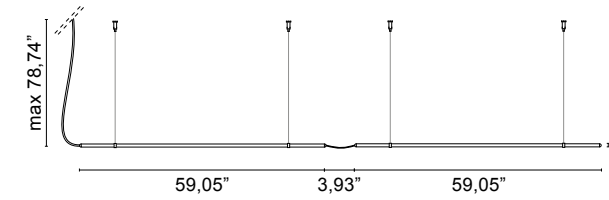


Suspension fixing kit supplied with the lamp
 Kit de fijación de la suspensión suministrado con la lámpara

U1674 _ _ / _ _ 1.10 lb

.02 ■ Black - Negro

/W	LED 24V 37,5W	4440lm	4000K
/WW	LED 24V 37,5W	4050lm	3000K
/XW	LED 24V 37,5W	3600lm	2700K

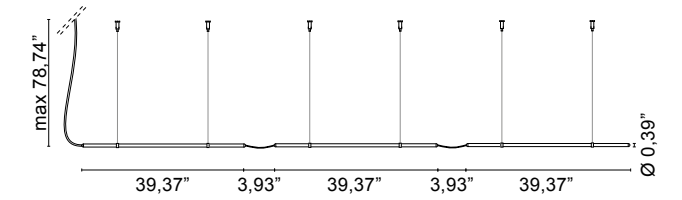

Suspension fixing kit supplied with the lamp
 Kit de fijación de la suspensión suministrado con la lámpara

U1675 _ _ / _ _ 1.32 lb


.02 ■ Black - Negro

/W	LED 24V 37,5W	4440lm	4000K
/WW	LED 24V 37,5W	4050lm	3000K
/XW	LED 24V 37,5W	3600lm	2700K




Matita

Design Mati




Without canopy/driver
Sin roseta/conductor

CEILING ROSES FOR SUSPENSION SYSTEMS 24V / ROSETAS PARA SISTEMAS DE SUSPENSIÓN DE 24V



Canopy complete with 60W driver
Rosetón completa con controlador de 60W


U0990/60 . _ _	1.32 lb
.01 White - Blanco	60 W
.02 Black - Negro	60 W
.85 Painted silver finishing - Plata pintada	60 W
.86 Painted gold finishing - Oro pintado	60 W
.87 Painted copper finishing - Cobre pintado	60 W
.88 Painted bronze finishing - Bronce pintado	60 W



Canopy complete with 99W driver
Rosetón completa con controlador de 99W

U0990/100 . _ _ / _ _	2.87 lb
.01 White - Blanco	99 W
.02 Black - Negro	99 W
.85 Painted silver finishing - Plata pintada	99 W
.86 Painted gold finishing - Oro pintado	99 W
.87 Painted copper finishing - Cobre pintado	99 W
.88 Painted bronze finishing - Bronce pintado	99 W


/P	DIMMER		MAX 75W
/V	DIMMER		MAX 75W
/D	DIMMER		MAX 75W



Canopy complete with driver 198W
Roseta completa con driver de 198W

U0990/200 . _ _ / _ _	4.41 lb
.01 White - Blanco	198 W
.02 Black - Negro	198 W
.85 Painted silver finishing - Plata pintada	198 W
.86 Painted gold finishing - Oro pintado	198 W
.87 Painted copper finishing - Cobre pintado	198 W
.88 Painted bronze finishing - Bronce pintado	198 W

/P	DIMMER		MAX 2x75W
/V	DIMMER		MAX 2x75W
/D	DIMMER		MAX 2x75W

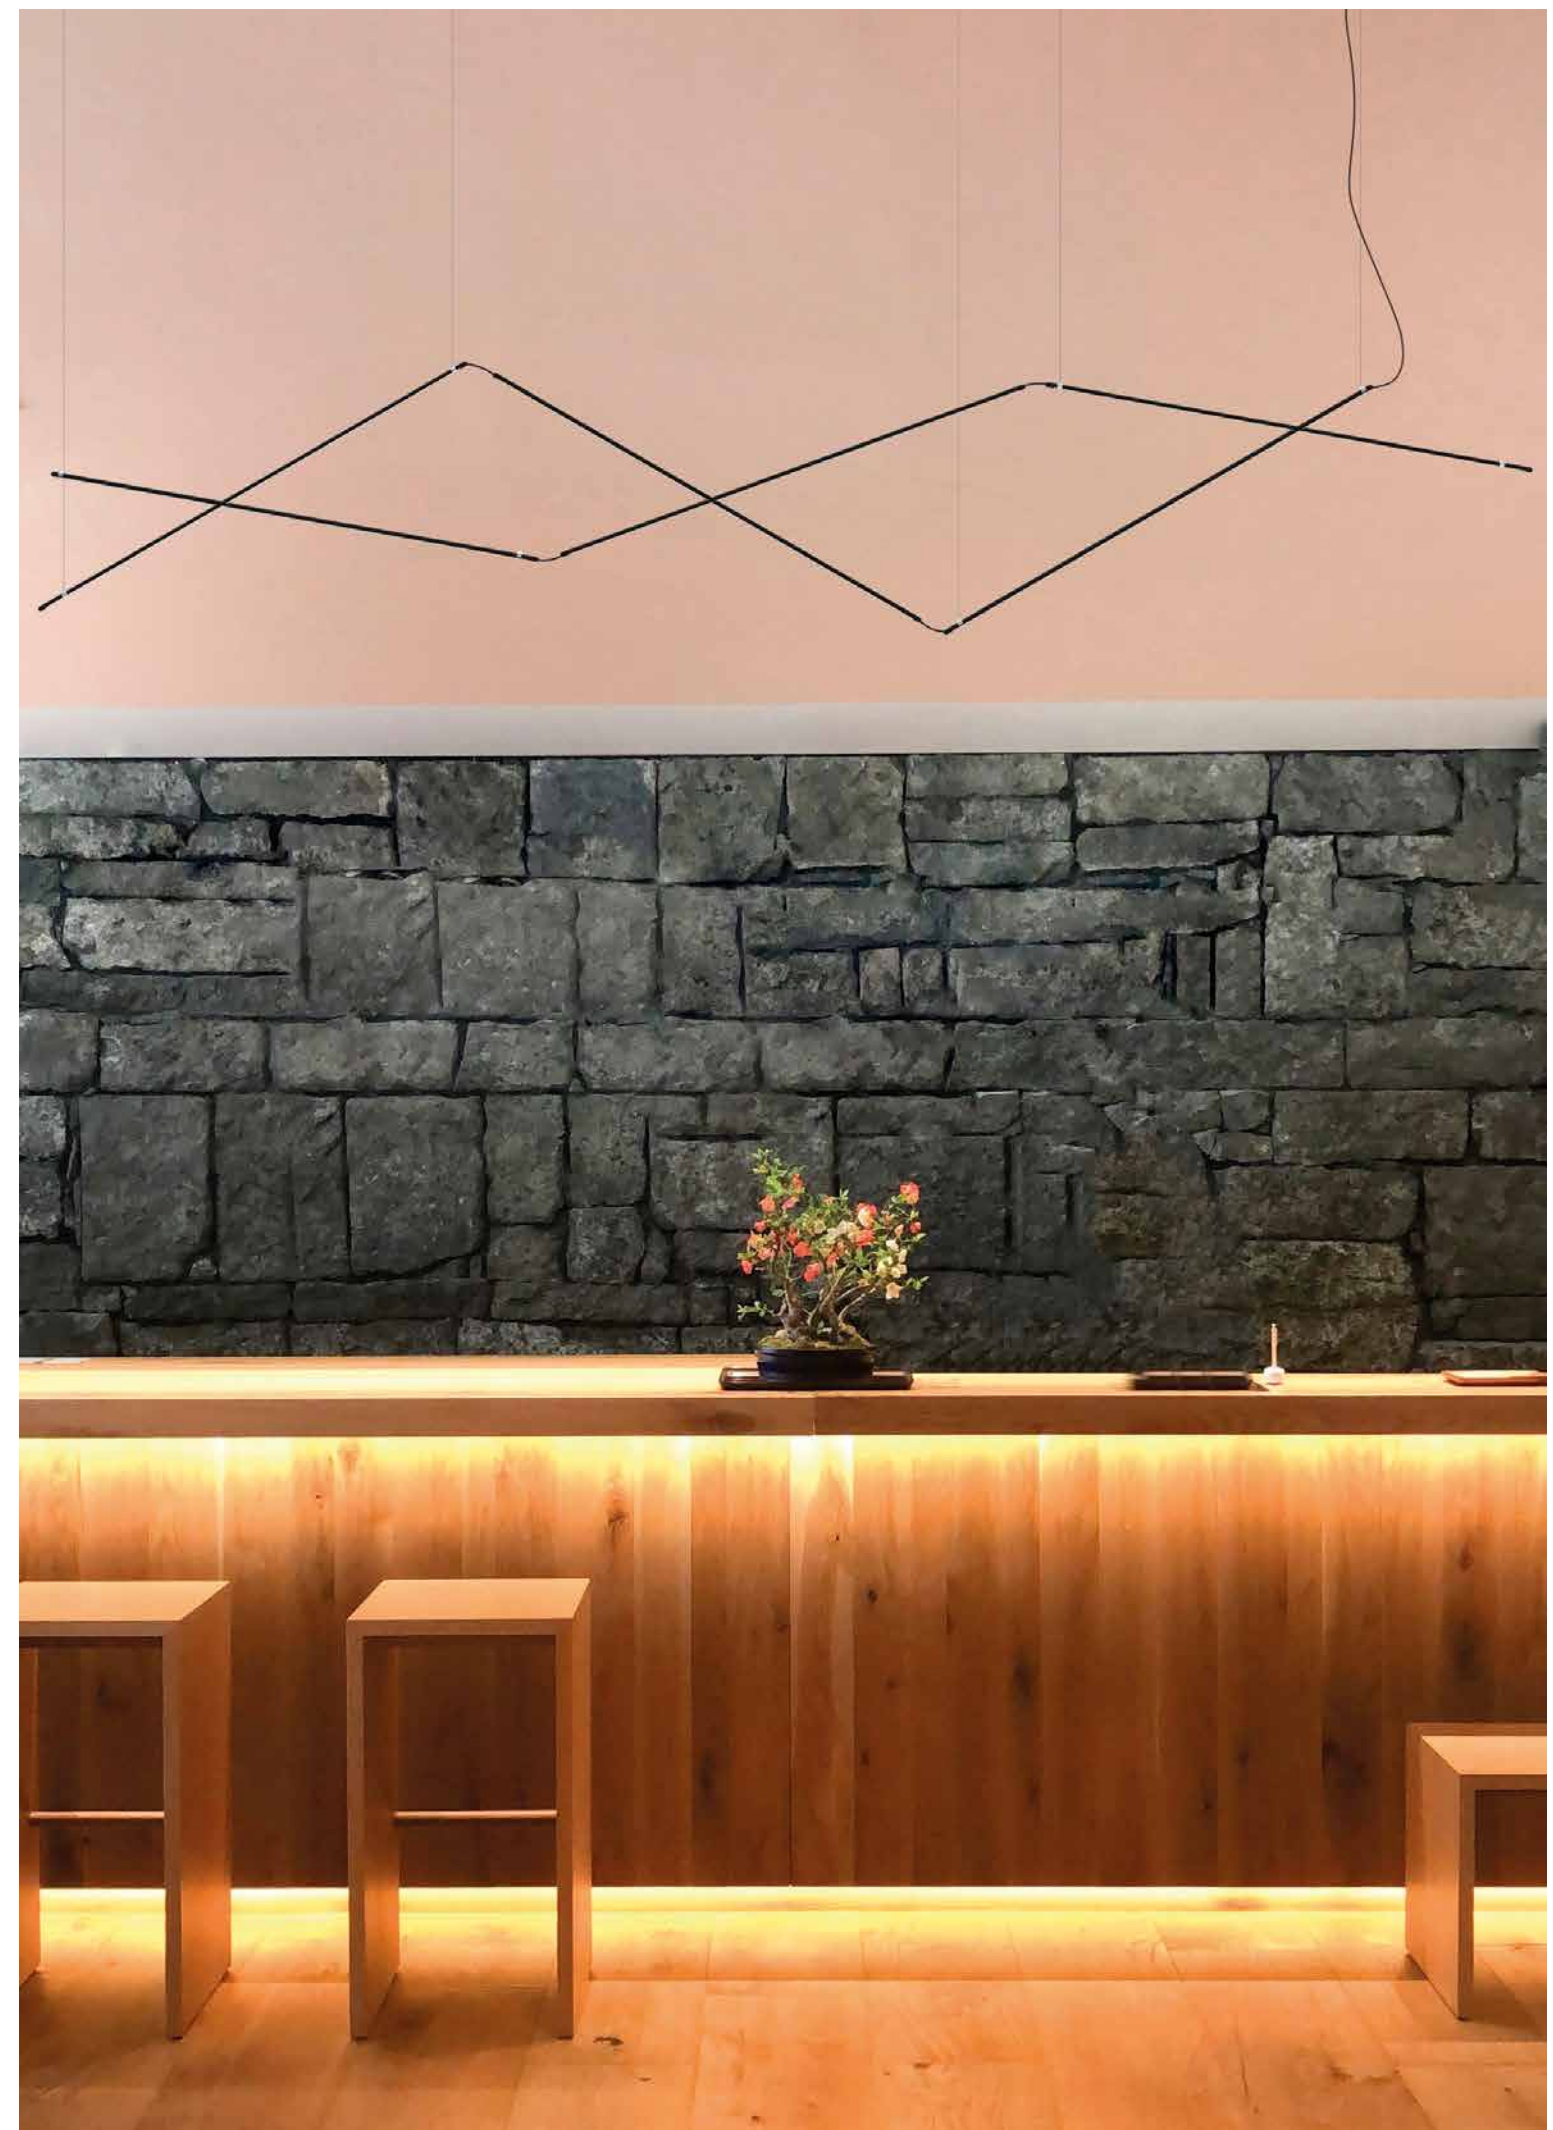



INDOOR

Radars

Design ABS Studio



Ceiling and suspension lamps with circular lampshade in fabric and self-extinguishing PVC. Aluminum frame and internal diffuser in opal polycarbonate available in 3 diameters: 21,25", 28,34" and 40,15".

Lámparas de techo y colgantes con pantalla circular de tela y PVC autoextinguible. Marco de aluminio y difusor interior de policarbonato opal disponible en 3 diámetros: 21,25", 28,34" Y 40,15".

Radar

Design ABS Studio




Radar

Design ABS Studio




Dimmable on request
Regulable bajo pedido

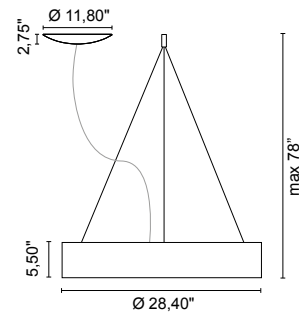

U1570 / / 5.51 lb

- .01** White - Blanco
- .02.01** Out black / in white - exterior negro interior blanco
- .02.21** Out black / in shiny gold - Negro / interior dorado brillante


/W	4000K	LED 37,8W CRI>90	4746lm
/WW	3000K	LED 37,8W CRI>90	4242lm
/XW	2700K	LED 37,8W CRI>90	3969lm

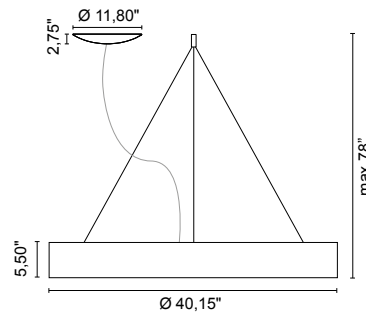

U1571 / / 6.61 lb

- .01** White - Blanco
- .02.01** Out black / in white - exterior negro interior blanco
- .02.21** Out black / in shiny gold - Negro / interior dorado brillante

/W	4000K	LED 54W CRI>90	6780lm
/WW	3000K	LED 54W CRI>90	6060lm
/XW	2700K	LED 54W CRI>90	5670lm

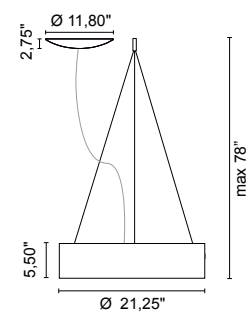

U1572 / / 3.97 lb

- .01** White - Blanco
- .02.01** Out black / in white - exterior negro interior blanco
- .02.21** Out black / in shiny gold - Negro / interior dorado brillante

/W	4000K	LED 27W CRI>90	3390lm
/WW	3000K	LED 27W CRI>90	3030lm
/XW	2700K	LED 27W CRI>90	2835lm



FINISHES CODES - CÓDIGOS DE ACABADOS




- .02.21** Out black / in shiny gold
Negro / interior dorado brillante
- .01** Out white / in white
Blanco / interior blanco
- .02.01** Out black / in white
exterior negro interior blanco



INDOOR

Moonlight

Design ABS Studio




Wall or ceiling lamp with radial emission with MDF front, aluminum structure, internal opal polycarbonate diffuser, integrated driver. Available in 3 dimensions. The original white version can be decorated with different finishes and wallpaper, mirrors and gold and silver leaf solution are available. The unique finish grants the use of water-based paint, making Moonlight a novelty lamp for each space.

Lámparas de techo o de pared con luz radial caracterizadas por un disco frontal de MDF que puede pintarse con pintura al agua u otro material de su elección. Disponible en tres tamaños. Sólo la versión pequeña está disponible también en acabado espejo. Partiendo de un único punto de suministro, es posible crear composiciones intersectando varios elementos gracias a un Kit especial que debe pedirse por separado (Art.0963). Versión regulable bajo pedido.



Moonlight

Design ABS Studio

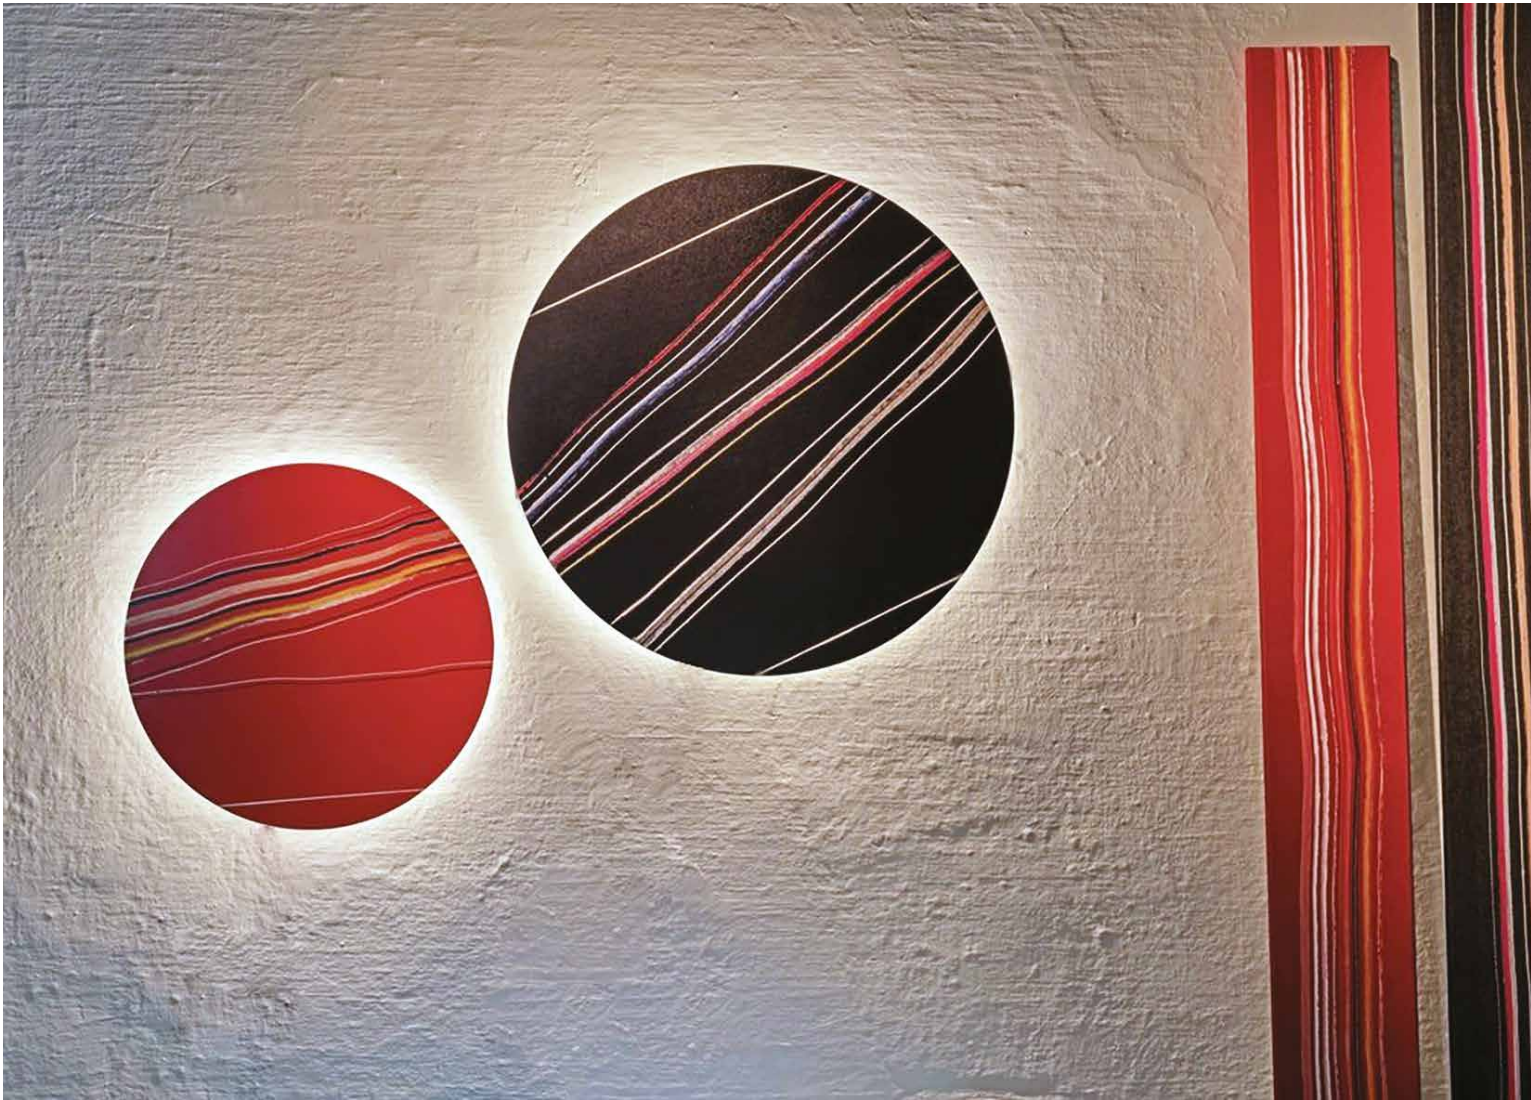




Moonlight

Design ABS Studio




Dimmable on request
Regulable bajo pedido

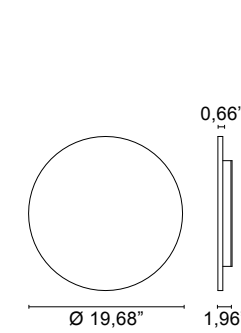

U4582 / / 3.97 lb

- .01** Raw white - Blanco crudo
- .14** Blackboard - Pizarra
- .29** Gold leaf - Hoja de Oro
- .30** Silver leaf - Hoja de plata
- .56** Mirror - Espejo (No ceiling / Sin techo)


/W	4000K	LED 15W CRI>90	1840lm
/WW	3000K	LED 15W CRI>90	1650lm
/XW	2700K	LED 15W CRI>90	1560lm

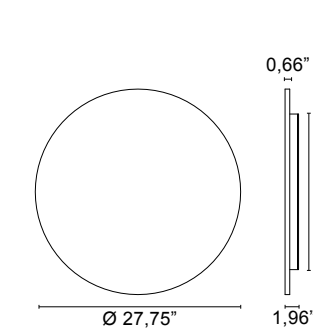

U4583 / / 6.61 lb

- .01** Raw white - Blanco crudo
- .14** Blackboard - Pizarra
- .29** Gold leaf - Hoja de Oro
- .30** Silver leaf - Hoja de plata
- .56** Mirror - Espejo (No ceiling / Sin techo)

/W	4000K	LED 24W CRI>90	2944lm
/WW	3000K	LED 24W CRI>90	2640lm
/XW	2700K	LED 24W CRI>90	2496lm

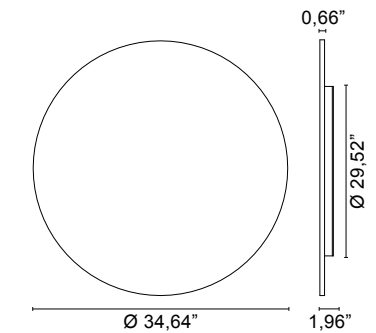

U4620 / / 8.82 lb

- .01** Raw white - Blanco crudo
- .14** Blackboard - Pizarra
- .29** Gold leaf - Hoja de Oro
- .30** Silver leaf - Hoja de plata
- .56** Mirror - Espejo (No ceiling / Sin techo)

/W	4000K	LED 33W CRI>90	4150lm
/WW	3000K	LED 33W CRI>90	3700lm
/XW	2700K	LED 33W CRI>90	3460lm



OPTIONAL




Kit for overlapping only for art. U4582-U4583
Distanciador para instalaciones múltiples sólo para Art. U4582-U4583

0963

- .01** White - Blanco


FINISHES CODES - CÓDIGOS DE ACABADOS

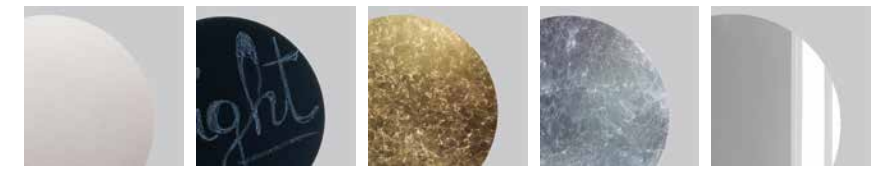



- .01** Raw white to be painted
Blanco crudo para terminar
- .14** Blackboard
Pizarra
- .29** Gold leaf
Hoja de Oro
- .30** Silver leaf
Hoja de plata
- .56** Mirror
no ceiling mounting
Espejo no para techo

Moonlight

Design ABS Studio




Ph. Flavio Ricci

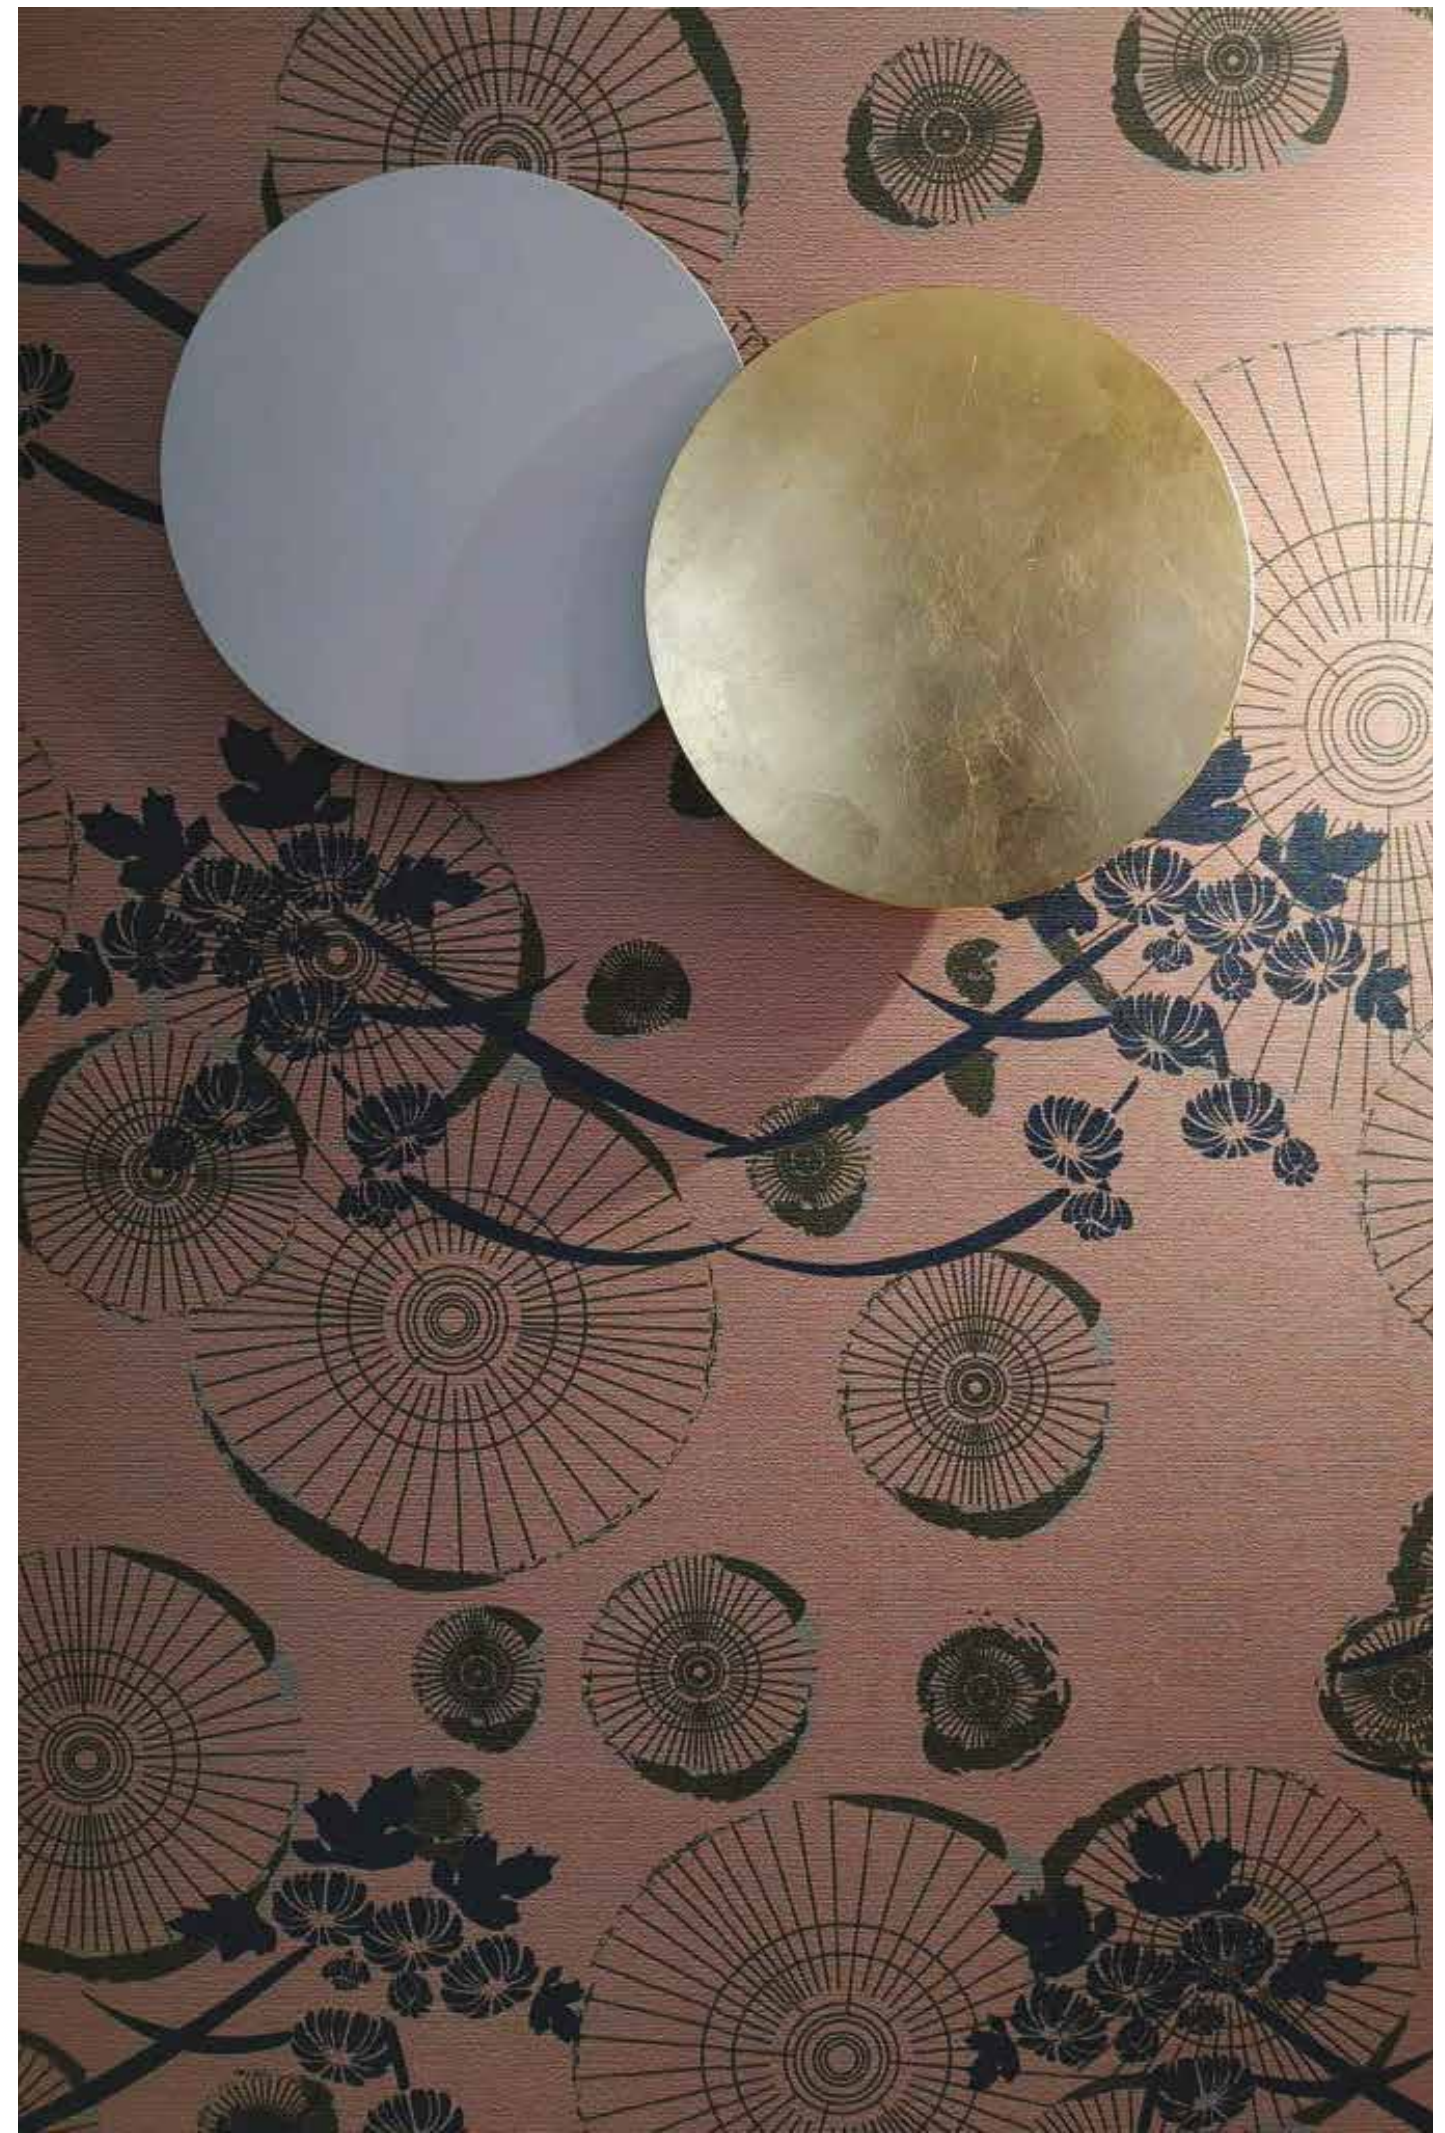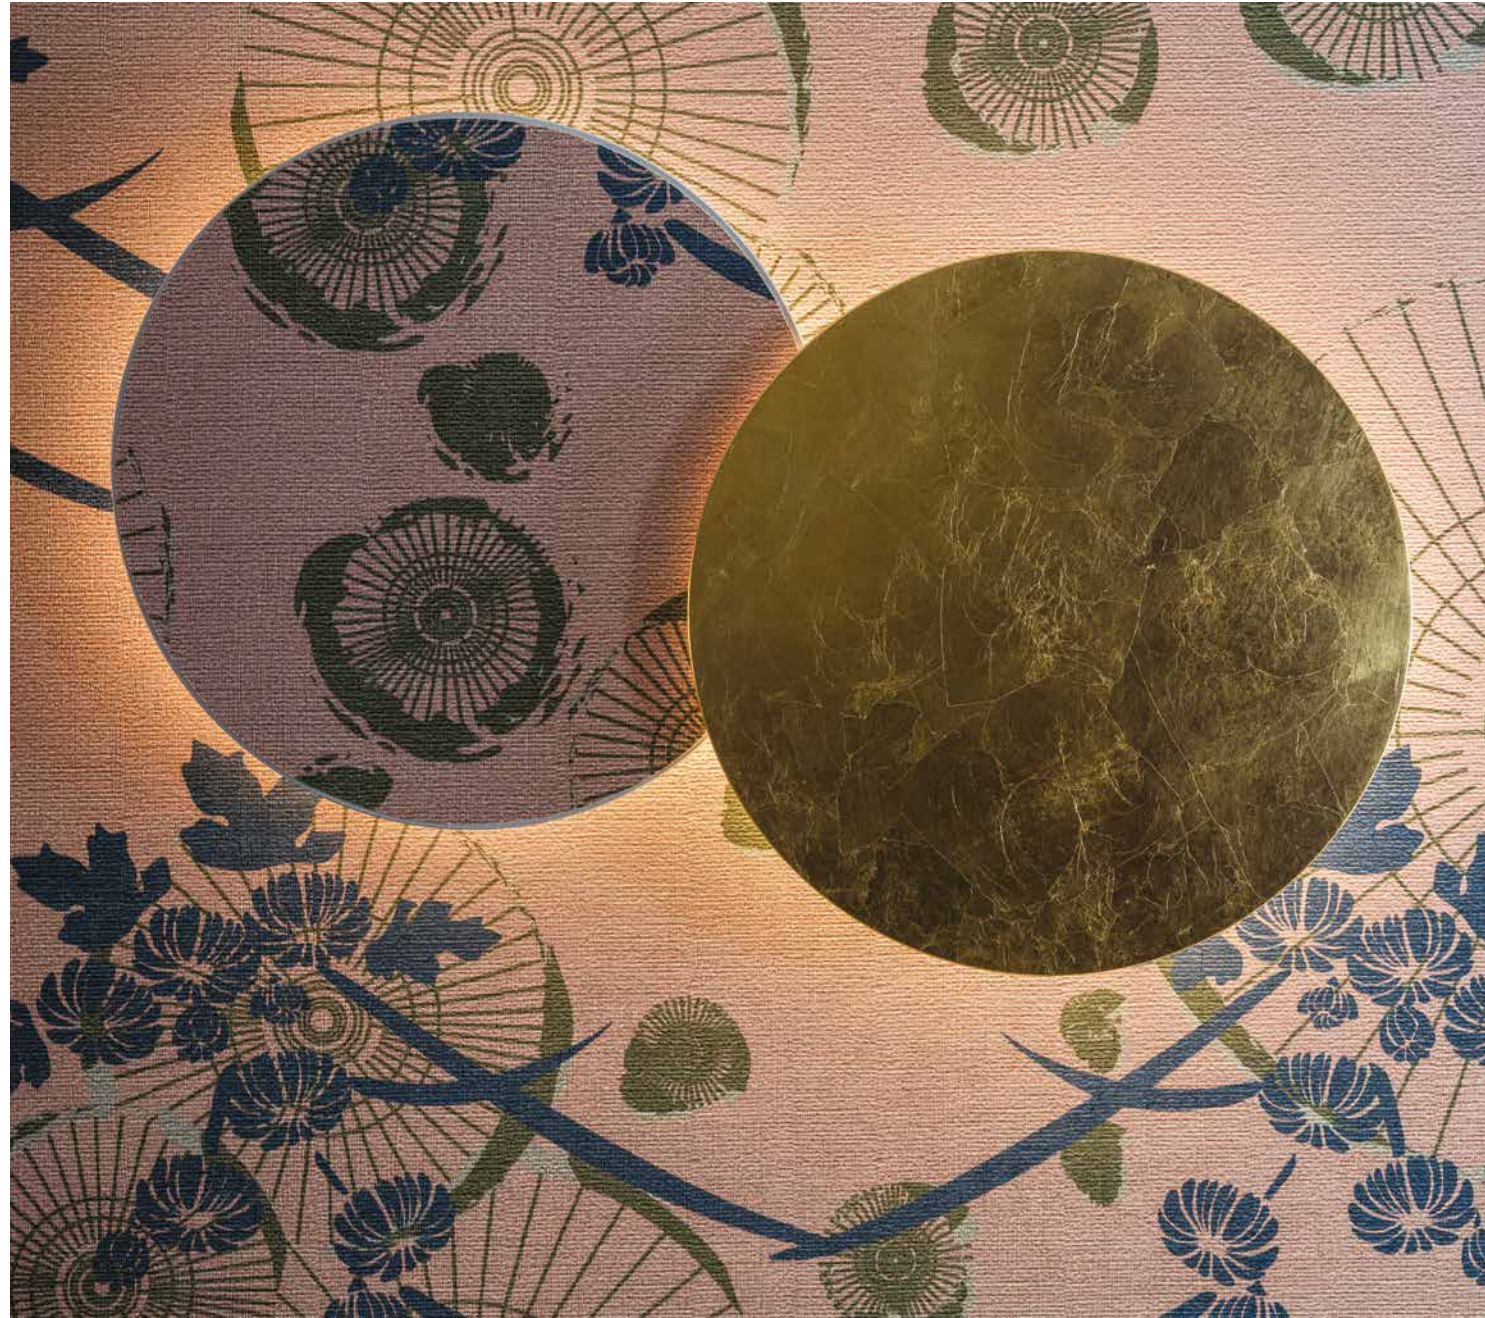


Moonlight
Design ABS Studio







Moonlight

Design ABS Studio




Dimmable on request
Regulable bajo pedido

INSTALLATION - INSTALACIÓN

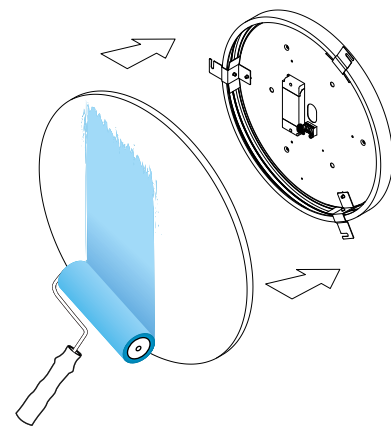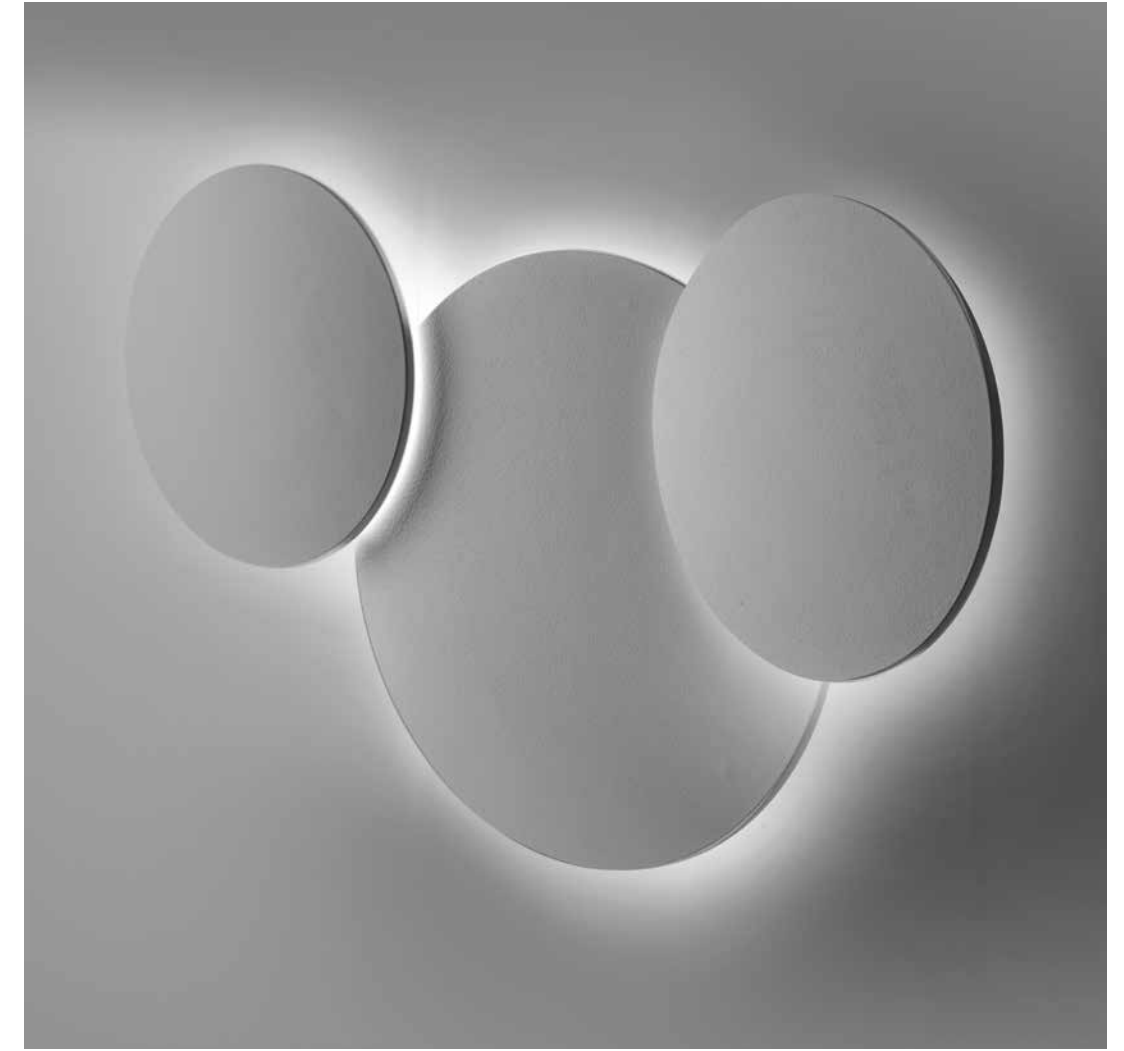

Example of single installation
Ejemplo de instalación individual

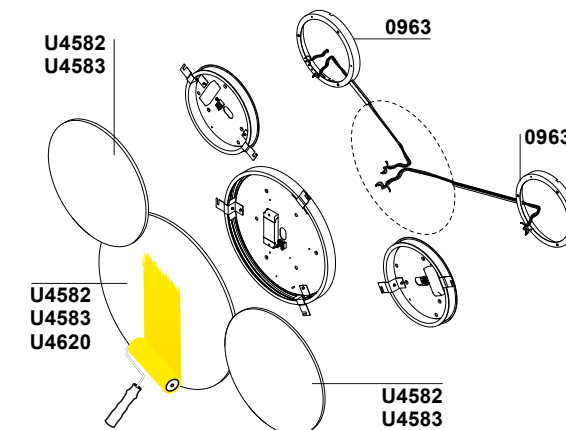

Example of multiple installation with spacers
Art.0963 can be used in multiple installations as long as it is positioned as a lamp on the wall.


Ejemplo de instalación múltiple con espaciadores el Art.0963 se puede utilizar en múltiples instalaciones siempre que se coloque como lámpara en la pared.

Moonlight

Design ABS Studio




Project Studio Keyart Milano

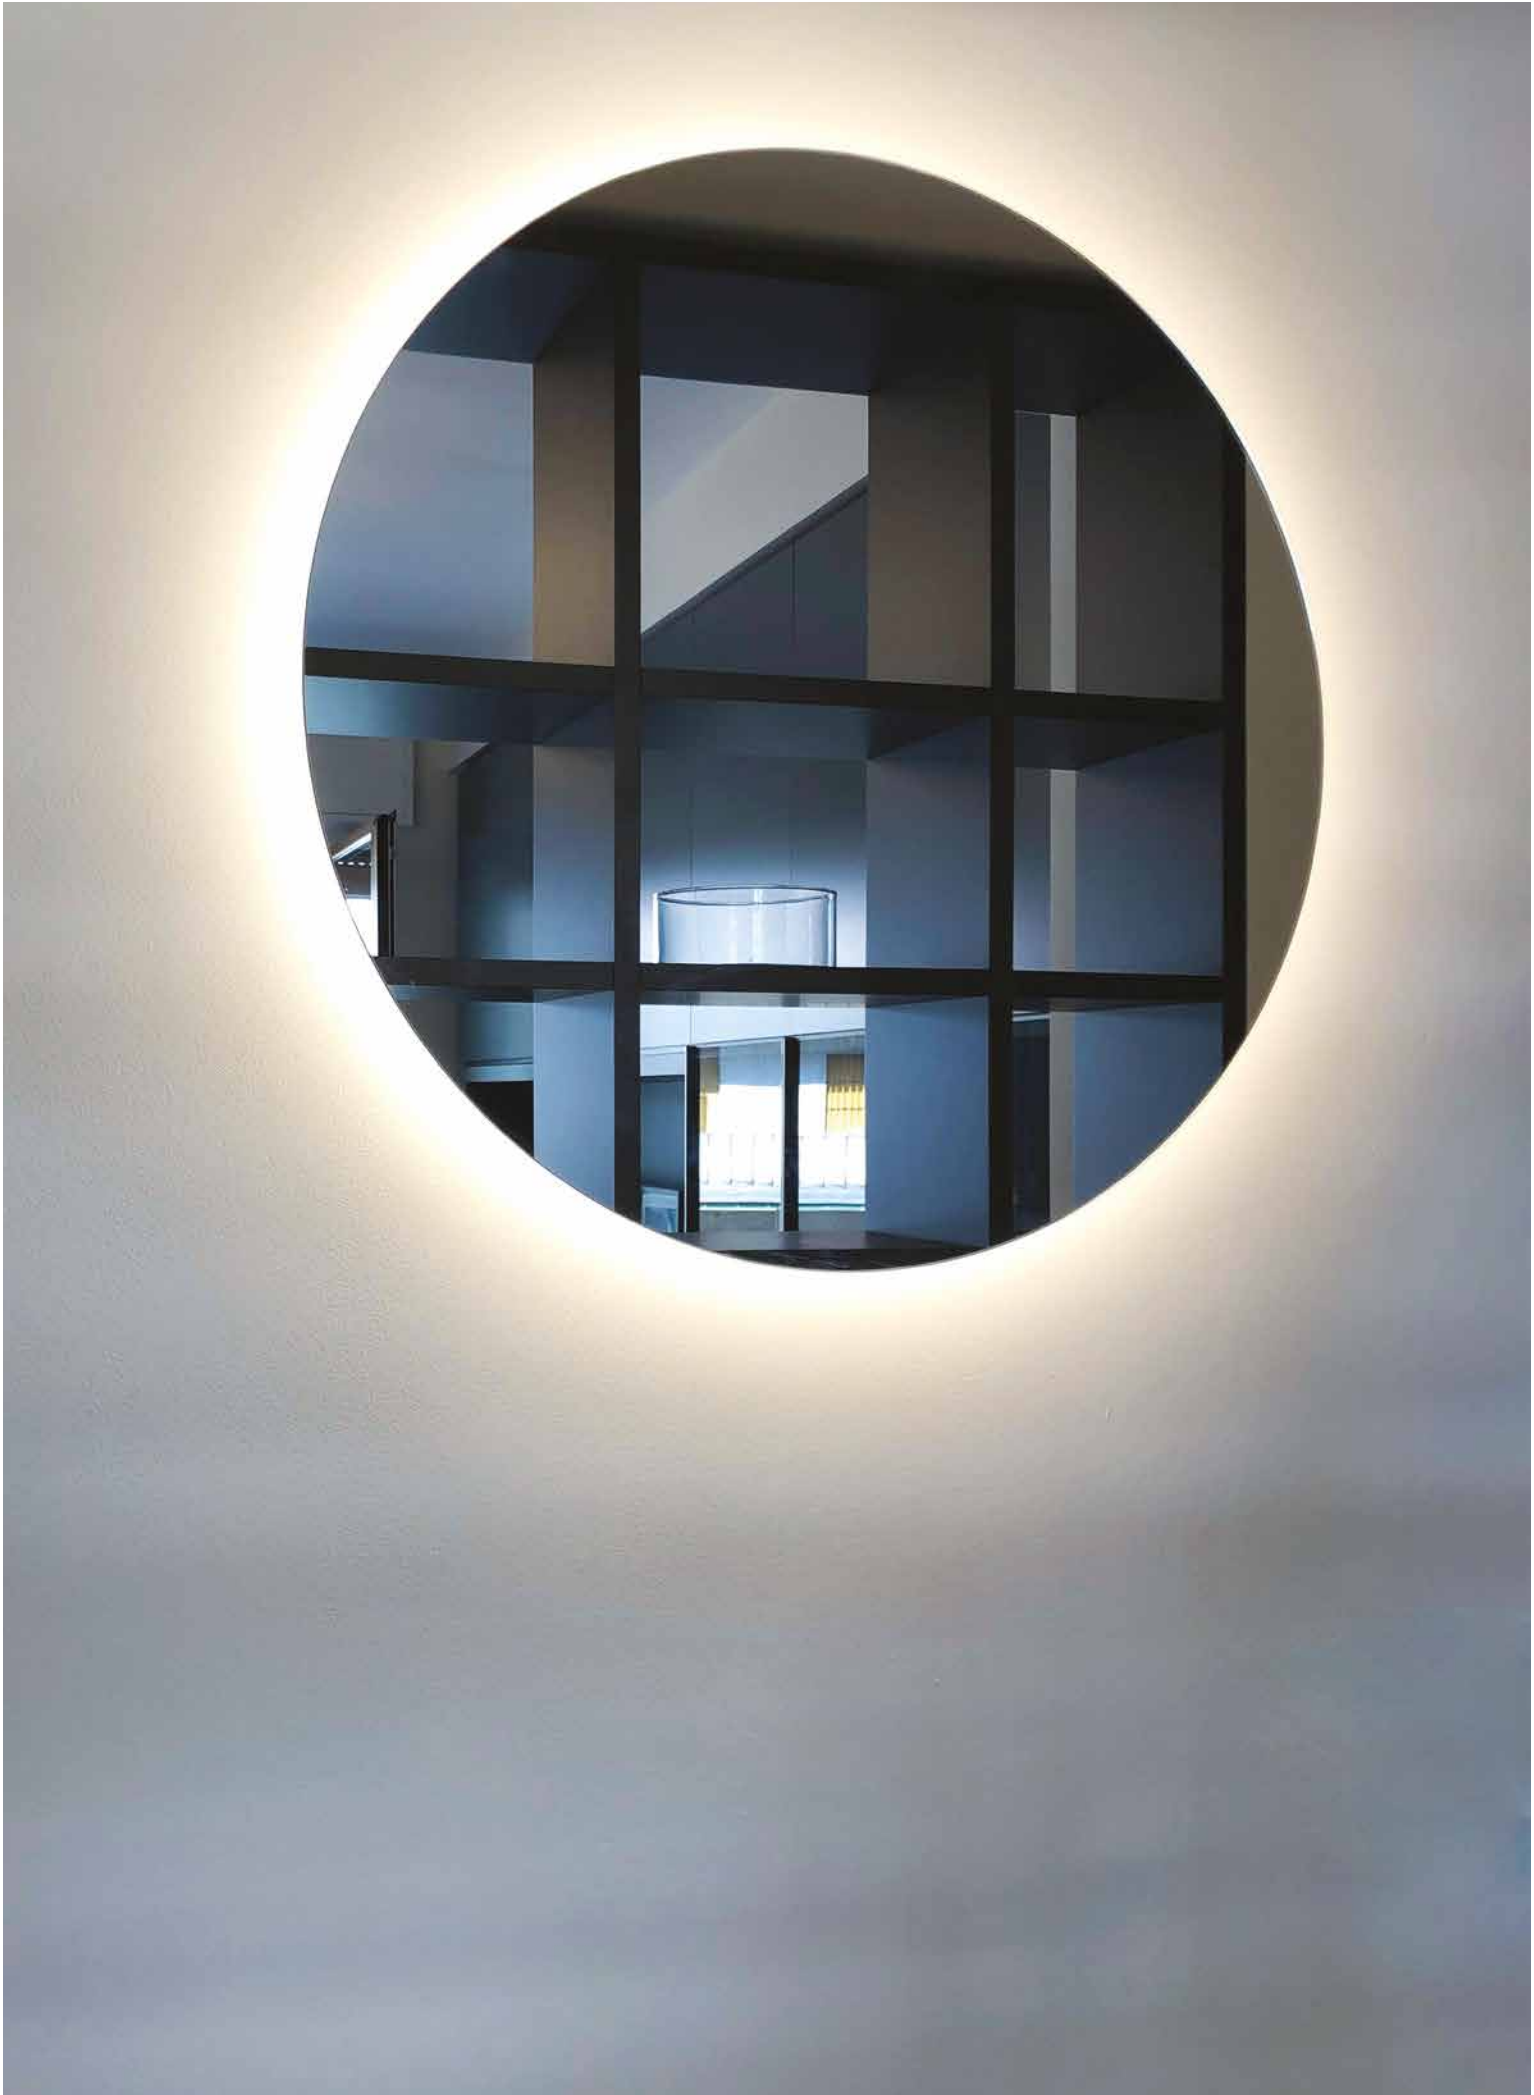

INDOOR

Tiny

Design: U.T. EGOLUCE



Tiny is a 24V system with a minimalist design that fits in every type of environment and solution. Thanks to the various magnetic components, different customised configurations can be easily and immediately created to meet any requirement. The accessories that can be integrated are: opal or raster inserts that provide diffuse and no glare lighting and spotlights of different sizes. The strength of this product is both the ease with which it can be configured and customised and its low profile that makes it perfect for any type of space.

WARNING!: The track is not sectional

Tiny es un sistema de 24 V con un diseño minimalista que encaja en cualquier entorno y solución. Gracias a los distintos componentes magnéticos, se pueden crear fácil e inmediatamente diversas configuraciones personalizadas para satisfacer cualquier necesidad. Los accesorios que se pueden integrar son insertos opalescentes o de trama que proporcionan una iluminación difusa y sin deslumbramientos, y focos de diferentes tamaños. El punto fuerte de este producto es tanto su facilidad de configuración y personalización como su perfil bajo, lo que lo hace perfecto para cualquier tipo de espacio.

¡ATENCIÓN!: La pista no está seccionada.

Tiny - 24V track products

Design U.T. EGOLUCE




Tiny - 24V track products

Design U.T. EGOLUCE



SYSTEM ELEMENTS *ELEMENTOS LUMINOSOS*

NEWTON MICRO

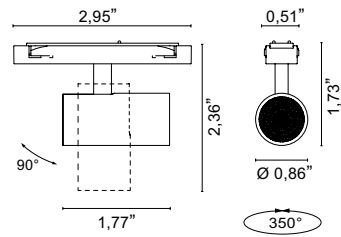

6722._ _ / _ _ 0.09 lb


.02 ■ Black - Negro

Optic degree

/WW	/20	3000K	LED 4W	310lm
/XW	/20	2700K upon request	LED 4W	310lm



NEWTON MINI

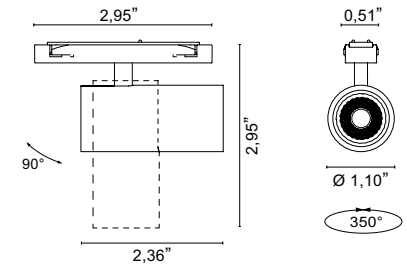

6723._ _ / _ _ 0.13 lb


.02 ■ Black - Negro

Optic degree

/WW	/24 /38	3000K	LED 7W	430lm
/XW	/24 /38	2700K upon request	LED 7W	390lm



SEGMENTO MINI

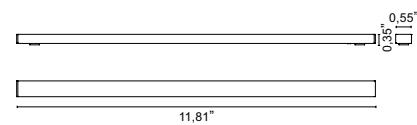


6724._ _ / _ _ 0.07 lb

.02 ■ Black - Negro

/WW	3000K	LED 4W	290lm
/XW	2700K upon request	LED 4W	270lm



SEGMENTO DARK MINI

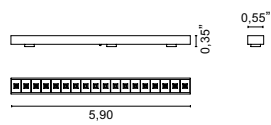

6725._ _ / _ _ 0.04 lb

.02 ■ Black - Negro

/WW	3000K	LED 4W	120lm
/XW	2700K upon request	LED 4W	110lm











Tiny - 24V track products


Design U.T. EGOLUCE

⏪ ⏩ ⚠ WARNING!: THE TRACK IS NOT SECTIONAL / ¡ATENCIÓN!: LA PISTA NO ESTÁ SECCIONADA

ACCESSORIES ACCESORIOS

 <p>Feed header <i>Cabecera de alimentación</i></p> <p>7404._ _ .02 ■ Black - Negro</p>	 <p>End cap <i>Tapa</i></p> <p>7405._ _ .02 ■ Black - Negro</p>	 <p>Connection set <i>Conjunto de conexiones</i></p> <p>7406._ _ .02 ■ Black - Negro</p>	 <p>90° ceiling/wall junction <i>90° unión techo/pared</i></p> <p>7407._ _ .02 ■ Black - Negro</p>
 <p>T-junction <i>Unión en T</i></p> <p>7408._ _ .02 ■ Black - Negro</p>	 <p>X-junction <i>Unión en X</i></p> <p>7409._ _ .02 ■ Black - Negro</p>	 <p>90° joint <i>Junta de 90°</i></p> <p>7410._ _ .02 ■ Black - Negro</p>	 <p>Track coverage 39,37" <i>Cobertura de vía 39,37"</i></p> <p>7411._ _ .02 ■ Black - Negro</p>

CONFIGURATION EXAMPLE EJEMPLO DE CONFIGURACIÓN

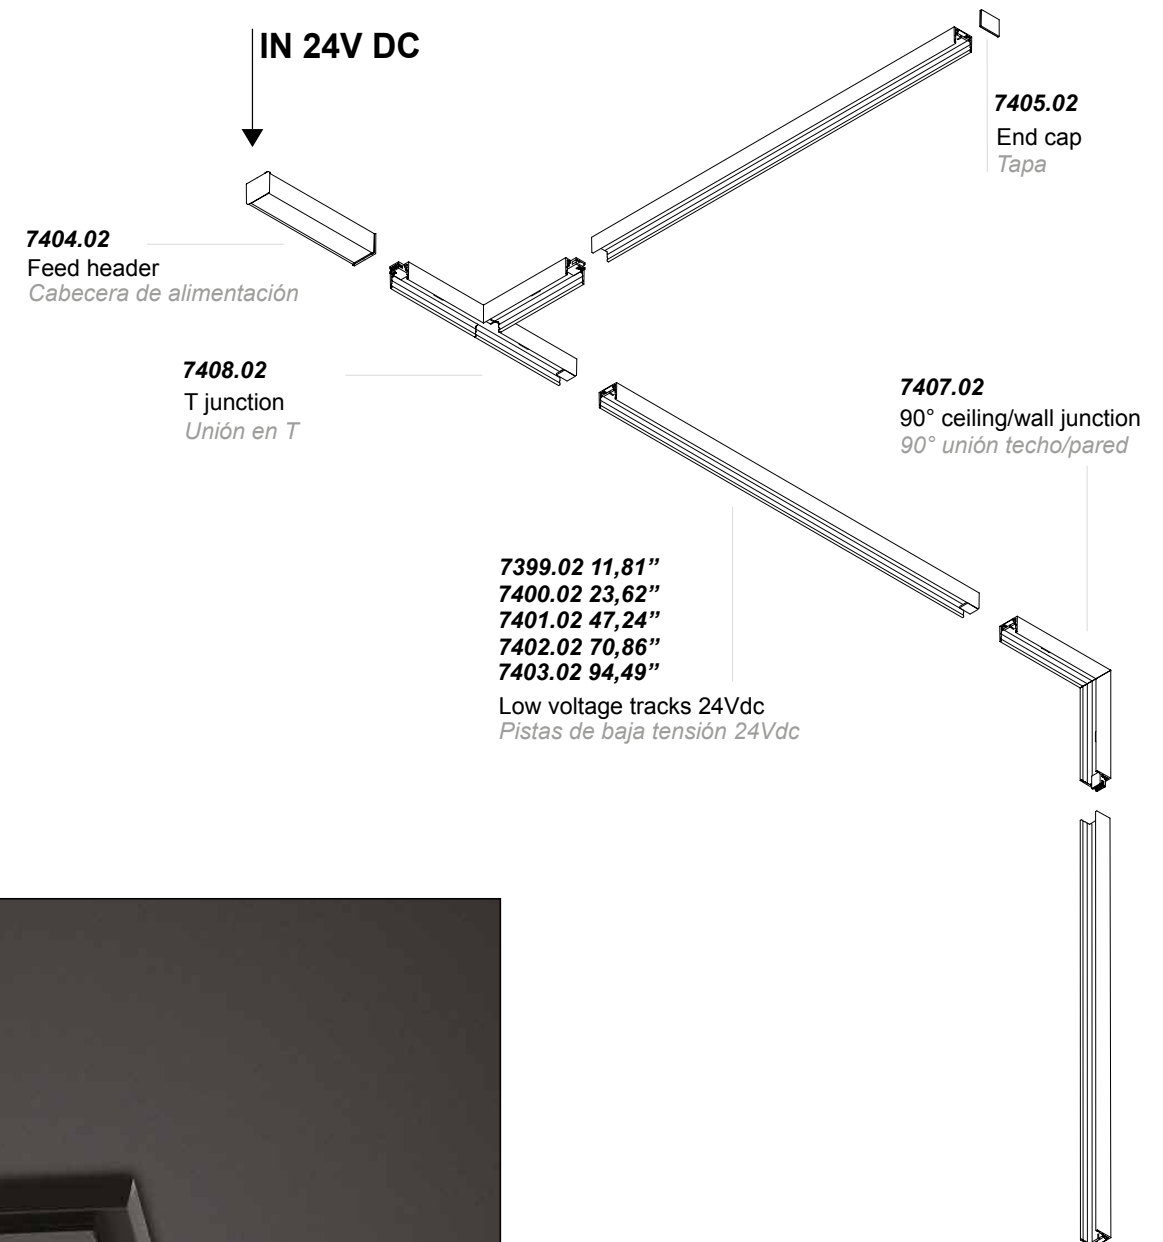



DRIVERS CONDUCTORES

		6722	6724	6725	6723
U0160/24	IN:120-277V OUT:24V-60W	1-8 spots	1-8 spots	1-8 spots	1-5 spots
U0161/24	IN:120-277V OUT:24V-100W	1-13 spots	1-13 spots	1-13 spots	1-8 spots



Tiny - 24V track products

Design U.T. EGOLUCE

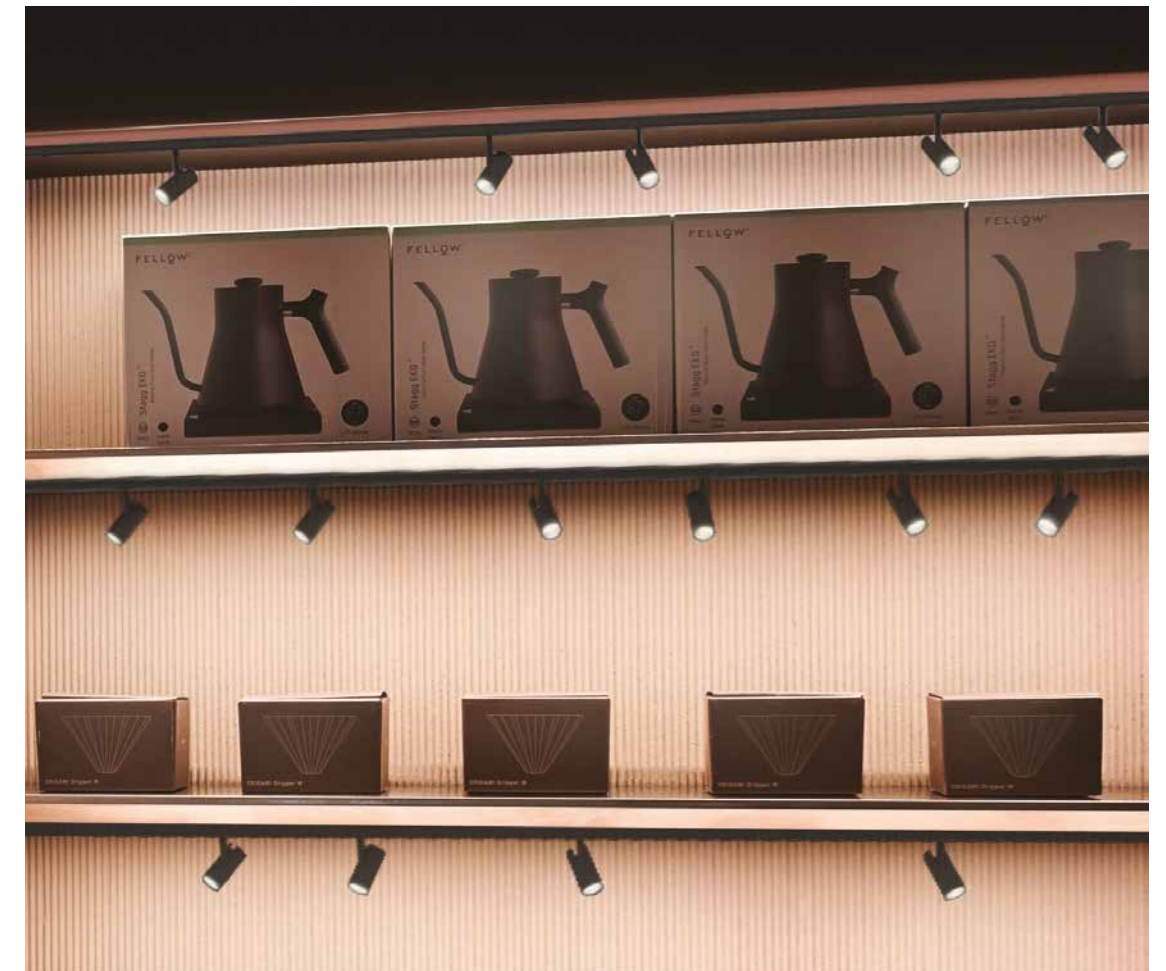


Tiny - 24V track products

Design U.T. EGOLUCE




Tiny - 24V track products

Design U.T. EGOLUCE



Tiny - 24V track products

Design U.T. EGOLUCE

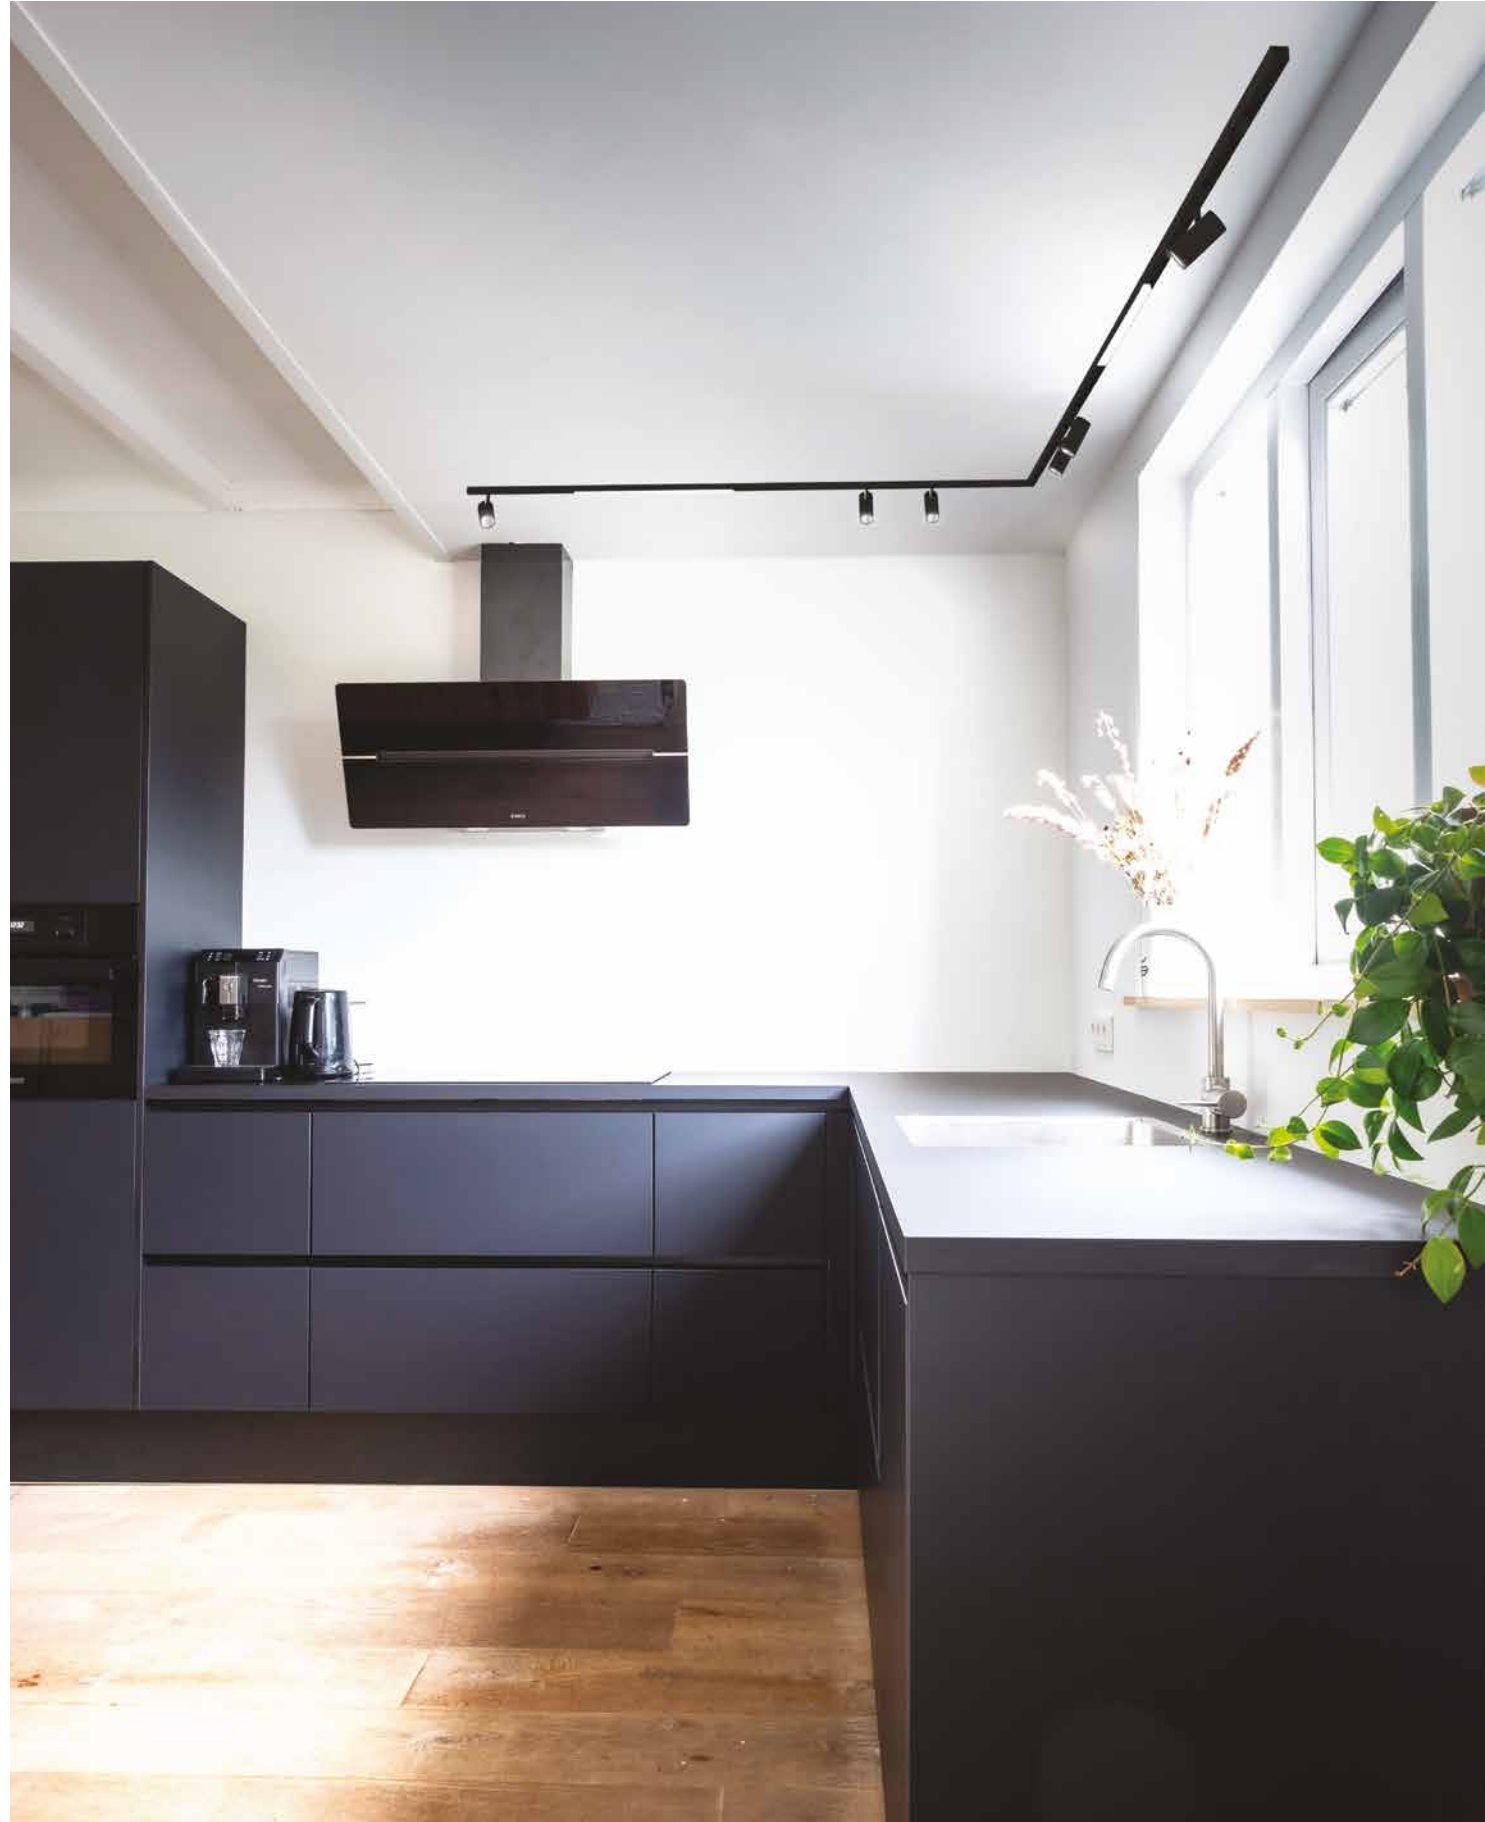



INDOOR

Newton

Design U.T. EgoLucé



Small projectors with minimal design. The aluminum body is available in three different models with diameters and heights. Finishes: white painted (RAL 9016 opaque), black (matt RAL 9005). Newton permits flexibility where it is possible to horizontally rotate up to 90° and 350° rotation on a vertical axis. Newton is available as a suspension lamp system with an aluminum body COB LED with direct and punctual light and a 3 meters coaxial cable. The source set back and possibly shielded by an opal glass (/ST) guarantees a pleasant non-dazzling effect.

Proyectores pequeños con un diseño minimalista. El cuerpo de aluminio está disponible en tres modelos distintos con diferentes diámetros y alturas. Acabados: pintado en blanco (RAL 9016 mate), negro (RAL 9005 mate). Newton permite flexibilidad, con la posibilidad de girar horizontalmente hasta 90° y rotar 350° en el eje vertical. Newton está disponible como sistema de luminaria colgante con un cuerpo de LED COB de aluminio para una luz directa y puntual y un cable coaxial de 3 metros. La fuente empotrada, protegida por un cristal opalino (/ST), garantiza un efecto agradable y sin deslumbramientos.

Newton Spots

Design U.T. EGOLUCE






Newton Spots

Design U.T. EGOLUCE



Newton Spots

Design U.T. EGOLUCE

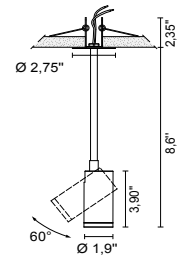


U6342 _ _ / _ _ / _ _ 1.21 lb

- .01 White - Blanco
- .02 Black - Negro



	Optic degree					
/W	/24 /38 /58	LED 8,9W 500mA	17,8V	1353lm	4000K	
/WW	/24 /38 /58	LED 8,9W 500mA	17,8V	1303lm	3000K	
/XW	/24 /38 /58	LED 8,9W 500mA	17,8V	1244lm	2700K	

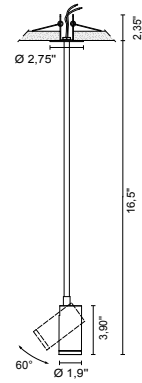

U6344 _ _ / _ _ / _ _ 7.94 lb

- .01 White - Blanco
- .02 Black - Negro



	Optic degree					
/W	/24 /38 /58	LED 8,9W 500mA	17,8V	1353lm	4000K	
/WW	/24 /38 /58	LED 8,9W 500mA	17,8V	1303lm	3000K	
/XW	/24 /38 /58	LED 8,9W 500mA	17,8V	1244lm	2700K	

ACCESSORIES ACCESORIOS



Louvres
Lightbreak

0267

- .01 White - Blanco
- .02 Black - Negro

Anti-glare screen
Pantalla antirreflejos

0274

- .01 White - Blanco
- .02 Black - Negro

AVAILABLE OPTICS / ÓPTICA DISPONIBLE



/24
Narrow beam optic for accent lighting
Óptica de haz estrecho para iluminación de acento

/38
Medium-beam optics
Óptica de haz medio

/58
Wide-beam optics
Óptica de haz ancho

/ST
Diffuse beam optics for general lighting
Óptica de haz difuso para iluminación general

DRIVERS CONDUCTORES

- 0141/DIM** Multi-power dimmable driver PUSH - 1...10V - 1-2 Newton
- 0141/DALI** Multi-power DALI dimmable driver - 1-2 Newton
- 0145** Multi-power dimmable driver PUSH - 1...10V - 1-3 Newton

- 0145/DALI** Multi-power DALI dimmable driver - 1-3 Newton
- 0127** Drivers 500 mA - 1-6 Newton
- 0128** Drivers 350 mA - 1 Newton



Newton Spots

Design U.T. EGOLUCE



Repond & Nyckees Architectes Sàrl
Ph. David Boraley

Repond & Nyckees Architectes Sàrl
Ph. David Boraley


Newton Spots

Design U.T. EGOLUCE



Newton Spots Slim

Design U.T. EGOLUCE

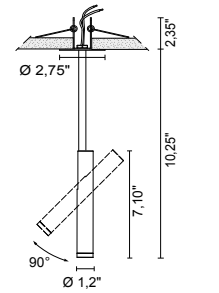


U6470 _ _ / _ _ / _ _ 0.88 lb

- .01** White - Blanco
- .02** Black - Negro



	Optic degree						
/W	/35	/48	/63	LED 8,9W 500mA	17,8V	1353lm	4000K
/WW	/35	/48	/63	LED 8,9W 500mA	17,8V	1303lm	3000K
/XW	/35	/48	/63	LED 8,9W 500mA	17,8V	1244lm	2700K

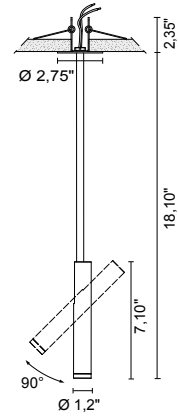

U6471 _ _ / _ _ / _ _ 1.54 lb

- .01** White - Blanco
- .02** Black - Negro



	Optic degree						
/W	/35	/48	/63	LED 8,9W 500mA	17,8V	1353lm	4000K
/WW	/35	/48	/63	LED 8,9W 500mA	17,8V	1303lm	3000K
/XW	/35	/48	/63	LED 8,9W 500mA	17,8V	1244lm	2700K

ACCESSORIES ACCESORIOS



Sand-blasted Pyrex glass diffuser
Difusor de vidrio Pyrex arenado

0265

- .01** White - Blanco
- .02** Black - Negro

AVAILABLE OPTICS / ÓPTICA DISPONIBLE



/35
Narrow beam optic for accent lighting
Óptica de haz estrecho para iluminación de acento

/48
Medium-beam optics
Óptica de haz medio

/63
Wide-beam optics
Óptica de haz ancho

/ST
Diffuse beam optics for general lighting
Óptica de haz difuso para iluminación general

DRIVERS CONDUCTORES

- 0141/DIM** Multi-power dimmable driver PUSH - 1...10V - 1-2 Newton
- 0141/DALI** Multi-power DALI dimmable driver - 1-2 Newton
- 0145** Multi-power dimmable driver PUSH - 1...10V - 1-3 Newton

- 0145/DALI** Multi-power DALI dimmable driver - 1-3 Newton
- 0127** Drivers 500 mA - 1-6 Newton
- 0128** Drivers 350 mA - 1 Newton



Newton Spots Flat


Design U.T. EGOLUCE





Newton Spots Flat

Design U.T. EGOLUCE




U6468 _ _ / _ _ / _ _ 1.32 lb

.01 White - Blanco

.02 Black - Negro

	Optic degree					
/W	/13 /40 /ST	LED 8,9W 500mA	17,8V	1353lm	4000K	
/WW	/13 /40 /ST	LED 8,9W 500mA	17,8V	1303lm	3000K	
/XW	/13 /40 /ST	LED 8,9W 500mA	17,8V	1244lm	2700K	

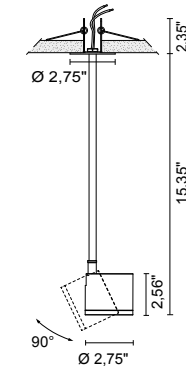

U6469 _ _ / _ _ / _ _ 1.54 lb

.01 White - Blanco

.02 Black - Negro

	Optic degree					
/W	/13 /40 /ST	LED 8,9W 500mA	17,8V	1353lm	4000K	
/WW	/13 /40 /ST	LED 8,9W 500mA	17,8V	1303lm	3000K	
/XW	/13 /40 /ST	LED 8,9W 500mA	17,8V	1244lm	2700K	

ACCESSORIES ACCESORIOS



Decorative parabolic reflector
Parábola decorativa

0264

.01 White - Blanco

.02 Black - Negro

AVAILABLE OPTICS / ÓPTICA DISPONIBLE



/13
Narrow beam optic for accent lighting
Óptica de haz estrecho para iluminación de acento



/40
Wide-beam optics
Óptica de haz ancho



/ST
Diffuse beam optics for general lighting
Óptica de haz difuso para iluminación general



DRIVERS CONDUCTORES

0141/DIM Multi-power dimmable driver PUSH - 1...10V - 1-2 Newton

0141/DALI Multi-power DALI dimmable driver - 1-2 Newton

0145 Multi-power dimmable driver PUSH - 1...10V - 1-3 Newton



0145/DALI Multi-power DALI dimmable driver - 1-3 Newton

0127 Drivers 500 mA - 1-6 Newton

0128 Drivers 350 mA - 1 Newton

Newton Track 48V

Design U.T. EGOLUCE



U6343 _ _ / _ _ / _ _ 0.88 lb


.01 White - Blanco

.02 Black - Negro



Optic degree

/W	/24 /38 /58	LED 48V DC 8,9W	1353lm	4000K
/WW	/24 /38 /58	LED 48V DC 8,9W	1303lm	3000K
/XW	/24 /38 /58	LED 48V DC 8,9W	1244lm	2700K

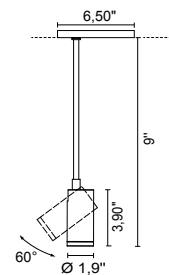

U6345 _ _ / _ _ / _ _ 1.10 lb


.01 White - Blanco

.02 Black - Negro



Optic degree

/W	/24 /38 /58	LED 48V DC 8,9W	1353lm	4000K
/WW	/24 /38 /58	LED 48V DC 8,9W	1303lm	3000K
/XW	/24 /38 /58	LED 48V DC 8,9W	1244lm	2700K

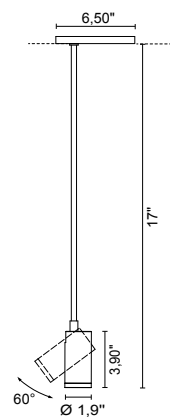

U6346 _ _ / _ _ / _ _ 1.54 lb

.01 White - Blanco

.02 Black - Negro



Optic degree

/W	/24 /38 /58	LED 48V DC 8,9W	1353lm	4000K
/WW	/24 /38 /58	LED 48V DC 8,9W	1303lm	3000K
/XW	/24 /38 /58	LED 48V DC 8,9W	1244lm	2700K



ACCESSORIES ACCESORIOS



Louvres
Lightbreak

0267

.01 White - Blanco

.02 Black - Negro



Anti-glare screen
Pantalla antirreflejos

0274

.01 White - Blanco

.02 Black - Negro

AVAILABLE OPTICS / ÓPTICA DISPONIBLE



/24

Narrow beam optic for accent lighting
Óptica de haz estrecho para iluminación de acento



/38

Medium-beam optics
Óptica de haz medio



/58

Wide-beam optics
Óptica de haz ancho



/ST

Diffuse beam optics for general lighting
Óptica de haz difuso para iluminación general



Newton Slim Track 48V

Design U.T. EGOLUCE



Newton Slim Track 48V

Design U.T. EGOLUCE

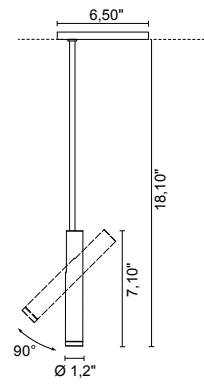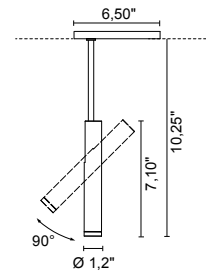

U6451 _ _ / _ _ / _ _ 1.10 lb

.01 White - Blanco

.02 Black - Negro



	Optic degree				
/W	/35 /48 /63	LED 48V DC 8,9W	1353lm	4000K	
/WW	/35 /48 /63	LED 48V DC 8,9W	1303lm	3000K	
/XW	/35 /48 /63	LED 48V DC 8,9W	1244lm	2700K	

U6452 _ _ / _ _ / _ _ 1.32 lb

.01 White - Blanco

.02 Black - Negro



	Optic degree				
/W	/35 /48 /63	LED 48V DC 8,9W	1353lm	4000K	
/WW	/35 /48 /63	LED 48V DC 8,9W	1303lm	3000K	
/XW	/35 /48 /63	LED 48V DC 8,9W	1244lm	2700K	

ACCESSORIES ACCESORIOS



Sand-blasted Pyrex glass diffuser
Difusor de vidrio Pyrex arenado

0265

.01 White - Blanco

.02 Black - Negro

AVAILABLE OPTICS / ÓPTICA DISPONIBLE



/35
Narrow beam optic for accent lighting
Óptica de haz estrecho para iluminación de acento



/48
Medium-beam optics
Óptica de haz medio



/63
Wide-beam optics
Óptica de haz ancho




/ST
Diffuse beam optics for general lighting
Óptica de haz difuso para iluminación general



Newton Flat Track 48V

Design U.T. EGOLUCE



U6448 _ / _ / _ 1.10 lb


.01 White - Blanco



.02 Black - Negro

Optic degree

/W	/13	/40	/ST	LED 48V DC 8,9W	1353lm	4000K
/WW	/13	/40	/ST	LED 48V DC 8,9W	1303lm	3000K
/XW	/13	/40	/ST	LED 48V DC 8,9W	1244lm	2700K

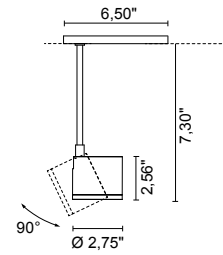

U6449 _ / _ / _ 1.32 lb


.01 White - Blanco



.02 Black - Negro

Optic degree

/W	/13	/40	/ST	LED 48V DC 8,9W	1353lm	4000K
/WW	/13	/40	/ST	LED 48V DC 8,9W	1303lm	3000K
/XW	/13	/40	/ST	LED 48V DC 8,9W	1244lm	2700K

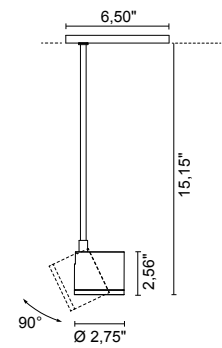

U6450 _ / _ / _ 1.54 lb

.01 White - Blanco



.02 Black - Negro

Optic degree

/W	/13	/40	/ST	LED 48V DC 8,9W	1353lm	4000K
/WW	/13	/40	/ST	LED 48V DC 8,9W <td>1303lm</td> <td>3000K</td>	1303lm	3000K
/XW	/13	/40	/ST	LED 48V DC 8,9W <td>1244lm</td> <td>2700K</td>	1244lm	2700K

ACCESSORIES ACCESORIOS



Decorative parabolic reflector
Parábola decorativa

0264

.01 White - Blanco

.02 Black - Negro

AVAILABLE OPTICS / ÓPTICA DISPONIBLE



/13
Narrow beam optic for accent lighting
Óptica de haz estrecho para iluminación de acento



/40
Wide-beam optics
Óptica de haz ancho



/ST
Diffuse beam optics for general lighting
Óptica de haz difuso para iluminación general



Track 48V


Design U.T. EGOLUCE



48V low voltage electrified tracks for ceiling, wall, suspensions applications. / Carriles electrificados de baja tensión de 48 V para aplicaciones de techo, pared y suspensión.

U7341._ _	39.37"	1.52 lb
.01	White - Blanco	
.02	Black - Negro	
U7342._ _	78.74"	3.04 lb
.01	White - Blanco	
.02	Black - Negro	
U7343._ _	118.11"	4.56 lb
.01	White - Blanco	
.02	Black - Negro	

CONFIGURATION EXAMPLE EJEMPLO DE CONFIGURACIÓN

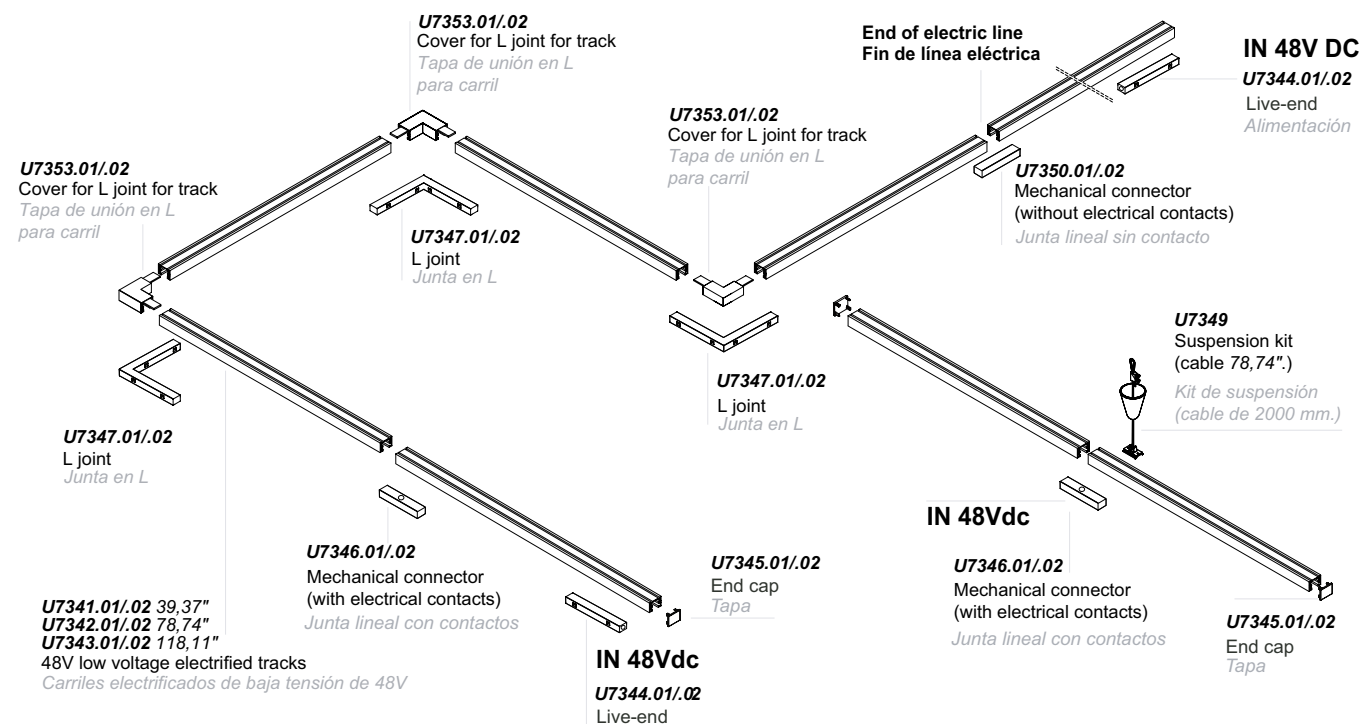

ACCESSORIES ACCESORIOS

U7344._ _ Live-end Alimentación	U7345._ _ End cap Tapa	U7346._ _ Mechanical connector (with electrical contacts) Junta lineal con contactos	U7347._ _ L joint Junta en L
.01 White - Blanco	.01 White - Blanco	.01 White - Blanco	.01 White - Blanco
.02 Black - Negro	.02 Black - Negro	.02 Black - Negro	.02 Black - Negro
U7349._ _ Suspension kit (cable 78.74") Kit de suspensión (cable de 78.74")	U7350._ _ Mechanical connector (without electrical contacts) Junta lineal sin contacto	U7353._ _ Cover for L joint for track Tapa de unión en L para carril	
.01 White - Blanco	.01 White - Blanco	.01 White - Blanco	
.02 Black - Negro	.02 Black - Negro	.02 Black - Negro	

DRIVERS CONDUCTORES

U0160/48	IN:90-264V OUT:48V-60W 1-4 Newton
U0161/48	IN:90-264V OUT:48V-100W 1-9 Newton
U0162/48	IN:90-305V OUT:48V-120W 1-10 Newton

Newton System

Design U.T. EGOLUCE




Newton System

Design U.T. EGOLUCE



2 displacement elements included
2 elementos de descentralización incluidos

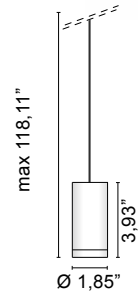


U1591. _ / _ / _ 1.10 lb

- .02** ■ Black - Negro
- .25** ■ Golded satin - Oro satinado
- .32** ■ Nickel mat - Níquel satinado



Optic degree					
/W	/ST	LED 6,1W 350mA	17,3V	975lm	4000K
/WW	/ST	LED 6,1W 350mA	17,3V	939lm	3000K
/XW	/ST	LED 6,1W 350mA	17,3V	896lm	2700K

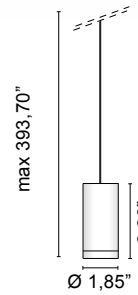

U1592. _ / _ / _ 1.54 lb

- .02** ■ Black - Negro
- .25** ■ Golded satin - Oro satinado
- .32** ■ Nickel mat - Níquel satinado



Optic degree					
/W	/ST	LED 6,1W 350mA	17,3V	975lm	4000K
/WW	/ST	LED 6,1W 350mA	17,3V	939lm	3000K
/XW	/ST	LED 6,1W 350mA	17,3V	896lm	2700K

OPTIONAL



Displacement component
Elemento de descentralización

0612 0.02 lb


- .01** ■ White - Blanco
- .02** ■ Black - Negro

AVAILABLE OPTICS / ÓPTICA DISPONIBLE




/ST
Diffuse beam optics for general lighting
Óptica de haz difuso para iluminación general

DECORATIVE ACCESSORIES / ACCESORIOS DECORATIVOS




Black painted metal screen
Pantalla metálica pintada de negro

0547. _ _
.02 ■ Black - Negro




Transparent blown glass diffuser
Difusor de vidrio soplado transparente

0549. _ _ **.00**
.02 ■ Black - Negro
.25 ■ Golded satin - Oro satinado
.32 ■ Nickel mat - Níquel satinado




Transparent blown white diffuser
Difusor de vidrio soplado blanco

0549. _ _ **.57**
.02 ■ Black - Negro
.25 ■ Golded satin - Oro satinado
.32 ■ Nickel mat - Níquel satinado

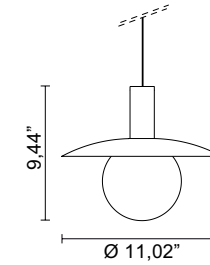

Black painted metal screen + Transparent blown glass diffuser
Pantalla metálica pintada de negro + Difusor de cristal soplado transparente

0547.02 + 0549. _ _ **.00**
.02 ■ Black - Negro
.25 ■ Golded satin - Oro satinado
.32 ■ Nickel mat - Níquel satinado

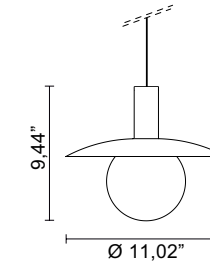

Black painted metal screen + Transparent blown white diffuser
Pantalla metálica pintada de negro + Difusor de cristal soplado blanco

0547.02 + 0549. _ _ **.57**
.02 ■ Black - Negro
.25 ■ Golded satin - Oro satinado
.32 ■ Nickel mat - Níquel satinado

FINISHES CODES - CÓDIGOS DE ACABADOS



.02 Black Negro
.25 Golded satin Oro satinado
.32 Nickel mat Níquel satinado



Newton System

Design U.T. EGOLUCE



Newton System

Design U.T. EGOLUCE



Newton System

Design U.T. EGOLUCE



CEILING CANOPY FOR SUSPENSION SYSTEMS 350mA ACCESORIOS Y ROSETAS CON CONTROLADOR UL PARA SISTEMAS DE SUSPENSIÓN DE 350 MA



IN: 50/60Hz 100/127V
OUT: 350mA DC



Ceiling canopy for plasterboard with springs and driver | NB from the 3" recessed hole through driver
Muelles para carton yeso incluye | NB el driver pasa por el mismo agujero de 3" a través del conductor

U0970. _ _

- .01 White - Blanco
- .02 Black - Negro



IN: 50/60Hz 100/127V
OUT: 350mA DC



Round canopy D.7,9" - H.1,2" with central outlet. | on UL-marked driver one per lamp
Rosetón redondo D.7,9" - H.1,2" con salida central | en controladores con marca UL uno por lámpara

U0557/1. _ _

- .01 White - Blanco
- .02 Black - Negro



IN: 50/60Hz 100/127V
OUT: 350mA DC




Round rosette D.13,8"- H.1,81" with three outlets | with three UL-marked drivers one per lamp
Rosetón redondo D.13,8"- H.1,81" con tres salidas | con tres controladores con marca UL, uno por lámpara

U0980/3. _ _

- .01 White - Blanco
- .02 Black - Negro



IN: 50/60Hz 100/127V
OUT: 350mA DC



Round canopy 18,9"x9,4" - H.1,2" with two outlets. | with two UL-marked drivers one per lamp
Rosetón redondo 18,9"x9,4" - H.1,2" con dos salidas | con dos controladores con marca UL, uno por lámpara

U0980/5. _ _

- .01 White - Blanco
- .02 Black - Negro



IN: 50/60Hz 100/127V
OUT: 350mA DC



Round canopy D.7,9" - H.1,2" with two radial outlets | with two UL-marked drivers one per lamp
Rosetón redondo D.7,9" - H.1,2" con dos salidas radiales | con dos controladores con marca UL, uno por lámpara

U0557/2. _ _

- .01 White - Blanco
- .02 Black - Negro




IN: 50/60Hz 100/127V
OUT: 350mA DC



Round rosette D.15" - H.1,2" with three radial outlets | with three UL-marked drivers one per lamp
Rosetón redondo D.15" - H.1,2" con tres salidas radiales | con tres controladores con marca UL, uno por lámpara

U0557/3. _ _

- .01 White - Blanco
- .02 Black - Negro

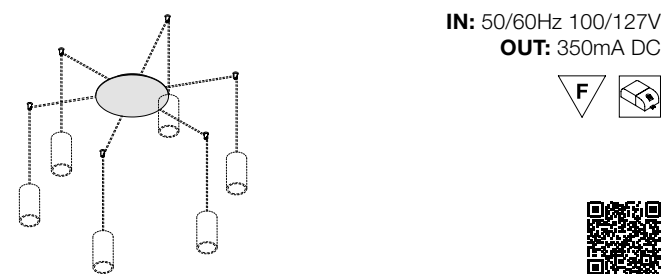

IN: 50/60Hz 100/127V
OUT: 350mA DC



Round rosette D.15" - H.1,2" with six radial outlets | with six UL-marked drivers one per lamp
Rosetón redondo D.15" - H.1,2" con seis salidas radiales | con seis controladores con marca UL, uno por lámpara

U0557/6. _ _

- .01 White - Blanco
- .02 Black - Negro



IN: 50/60Hz 100/127V
OUT: 350mA DC



Rectangular canopy 18,89"x9,44" - H.1,18" with two outlets. | with two UL-marked drivers one per lamp
Rosetón rectangular 18,89"x9,44" - H.1,18" con dos salidas | con dos controladores con marca UL, uno por lámpara

U0979/2. _ _

- .01 White - Blanco
- .02 Black - Negro





INDOOR

Stick

Design ABS Studio



Suspension lamp characterized by a high direct and punctual luminous efficiency with brass body, internal aluminum heat sink, 48° optical opening, and 98.5" power cable. The essential shape and size make Stick suitable for spotlighting on small tables, peninsulas or, arranged in groups of several elements, to illuminate hotel and office reception desks or large tables.

Lámpara de suspensión caracterizada por un alto rendimiento luminoso directo y preciso con cuerpo de latón, disipador térmico interno de aluminio, apertura óptica de 48° y cable de alimentación de 98.5". La forma y las dimensiones esenciales hacen que Stick sea adecuado para iluminar mesas pequeñas, penínsulas o, dispuesto en grupos de varios elementos, para iluminar mostradores de recepción de hoteles y oficinas o mesas grandes.



Stick system

Design ABS Studio




2 displacement elements included
2 elementos de descentralización incluidos

U1580.__ / __ 1.98 lb

- .01** White - *Blanco*
- .02** Black - *Negro*
- .21** Shiny golded - *Oro brillante*
- .25** Golded satin - *Oro satinado*



		Optic degree			
/W	/48	LED 6,1W 350mA	17,3V	975lm	4000K
/W	/ST	LED 6,1W 350mA	17,3V	975lm	4000K
/WW	/48	LED 6,1W 350mA	17,3V	939lm	3000K
/WW	/ST	LED 6,1W 350mA	17,3V	939lm	3000K
/XW	/48	LED 6,1W 350mA	17,3V	896lm	2700K
/XW	/ST	LED 6,1W 350mA	17,3V	896lm	2700K

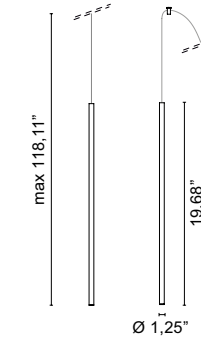


U1581.__ / __ 2.20 lb

- .01** White - *Blanco*
- .02** Black - *Negro*
- .21** Shiny golded - *Oro brillante*
- .25** Golded satin - *Oro satinado*



		Optic degree			
/W	/48	LED 6,1W 350mA	17,3V	975lm	4000K
/W	/ST	LED 6,1W 350mA	17,3V	975lm	4000K
/WW	/48	LED 6,1W 350mA	17,3V	939lm	3000K
/WW	/ST	LED 6,1W 350mA	17,3V	939lm	3000K
/XW	/48	LED 6,1W 350mA	17,3V	896lm	2700K
/XW	/ST	LED 6,1W 350mA	17,3V	896lm	2700K

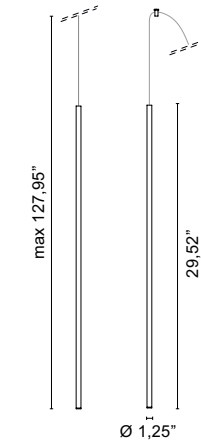


U1582.__ / __ 2.43 lb

- .01** White - *Blanco*
- .02** Black - *Negro*
- .21** Shiny golded - *Oro brillante*
- .25** Golded satin - *Oro satinado*



		Optic degree			
/W	/48	LED 6,1W 350mA	17,3V	975lm	4000K
/W	/ST	LED 6,1W 350mA	17,3V	975lm	4000K
/WW	/48	LED 6,1W 350mA	17,3V	939lm	3000K
/WW	/ST	LED 6,1W 350mA	17,3V	939lm	3000K
/XW	/48	LED 6,1W 350mA	17,3V	896lm	2700K
/XW	/ST	LED 6,1W 350mA	17,3V	896lm	2700K

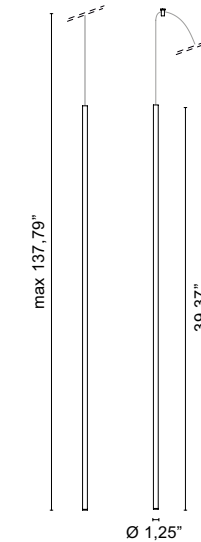

OPTIONAL



Displacement component
Elemento de descentralización

0612 0.02 lb

- .01** White - *Blanco*
- .02** Black - *Negro*

FINISHES CODES - CÓDIGOS DE ACABADOS



- .01** White
Blanco
- .02** Black
Negro
- .21** Shiny golded
Oro brillante
- .25** Golded satin
Oro satinado

Suspension fixing kit and ceiling canopies,
power supplies separately ordered
*El kit de montaje en suspensión y las rosetas
con fuentes de alimentación deben pedirse por
separado*

Stick system


Design ABS Studio



CEILING CANOPY FOR SUSPENSION SYSTEMS 350MA ACCESORIOS Y ROSETAS CON CONTROLADOR UL PARA SISTEMAS DE SUSPENSIÓN DE 350 MA



IN: 50/60Hz 100/127V
OUT: 350mA DC



Ceiling canopy for plasterboard with springs and driver | NB from the 3" recessed hole through driver
Muelles para cartón yeso incluye | NB el driver pasa por el mismo agujero de 3" a través del conductor

U0970. __

- .01 White - Blanco
- .02 Black - Negro



IN: 50/60Hz 100/127V
OUT: 350mA DC



Round canopy D.7,9" - H.1,2" with central outlet. | on UL-marked driver one per lamp
Rosetón redondo D.7,9" - H.1,2" con salida central | en controladores con marca UL uno por lámpara

U0557/1. __

- .01 White - Blanco
- .02 Black - Negro



IN: 50/60Hz 100/127V
OUT: 350mA DC



Round rosette D.13,8" - H.1,81" with three outlets | with three UL-marked drivers one per lamp
Rosetón redondo D.13,8" - H.1,81" con tres salidas | con tres controladores con marca UL, uno por lámpara

U0980/3. __

- .01 White - Blanco
- .02 Black - Negro



IN: 50/60Hz 100/127V
OUT: 350mA DC



Round canopy 18,9"x9,4" - H.1,2" with two outlets. | with two UL-marked drivers one per lamp
Rosetón redondo 18,9"x9,4" - H.1,2" con dos salidas | con dos controladores con marca UL, uno por lámpara

U0980/5. __

- .01 White - Blanco
- .02 Black - Negro



IN: 50/60Hz 100/127V
OUT: 350mA DC



Round canopy D.7,9" - H.1,2" with two radial outlets | with two UL-marked drivers one per lamp
Rosetón redondo D.7,9" - H.1,2" con dos salidas radiales | con dos controladores con marca UL, uno por lámpara

U0557/2. __

- .01 White - Blanco
- .02 Black - Negro




IN: 50/60Hz 100/127V
OUT: 350mA DC



Round rosette D.15" - H.1,2" with three radial outlets | with three UL-marked drivers one per lamp
Rosetón redondo D.15" - H.1,2" con tres salidas radiales | con tres controladores con marca UL, uno por lámpara

U0557/3. __

- .01 White - Blanco
- .02 Black - Negro

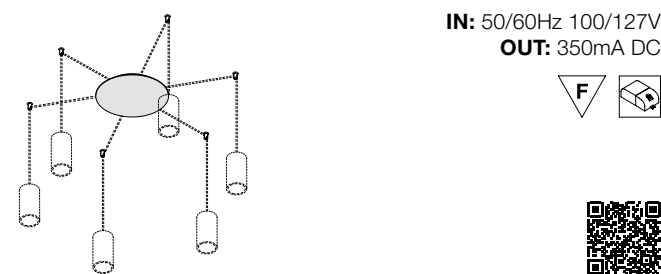

IN: 50/60Hz 100/127V
OUT: 350mA DC



Round rosette D.15" - H.1,2" with six radial outlets | with six UL-marked drivers one per lamp
Rosetón redondo D.15" - H.1,2" con seis salidas radiales | con seis controladores con marca UL, uno por lámpara

U0557/6. __

- .01 White - Blanco
- .02 Black - Negro




IN: 50/60Hz 100/127V
OUT: 350mA DC



Rectangular canopy 18,89"x9,44" - H.1,18" with two outlets. | with two UL-marked drivers one per lamp
Rosetón rectangular 18,89"x9,44" - H.1,18" con dos salidas | con dos controladores con marca UL, uno por lámpara

U0979/2. __

- .01 White - Blanco
- .02 Black - Negro

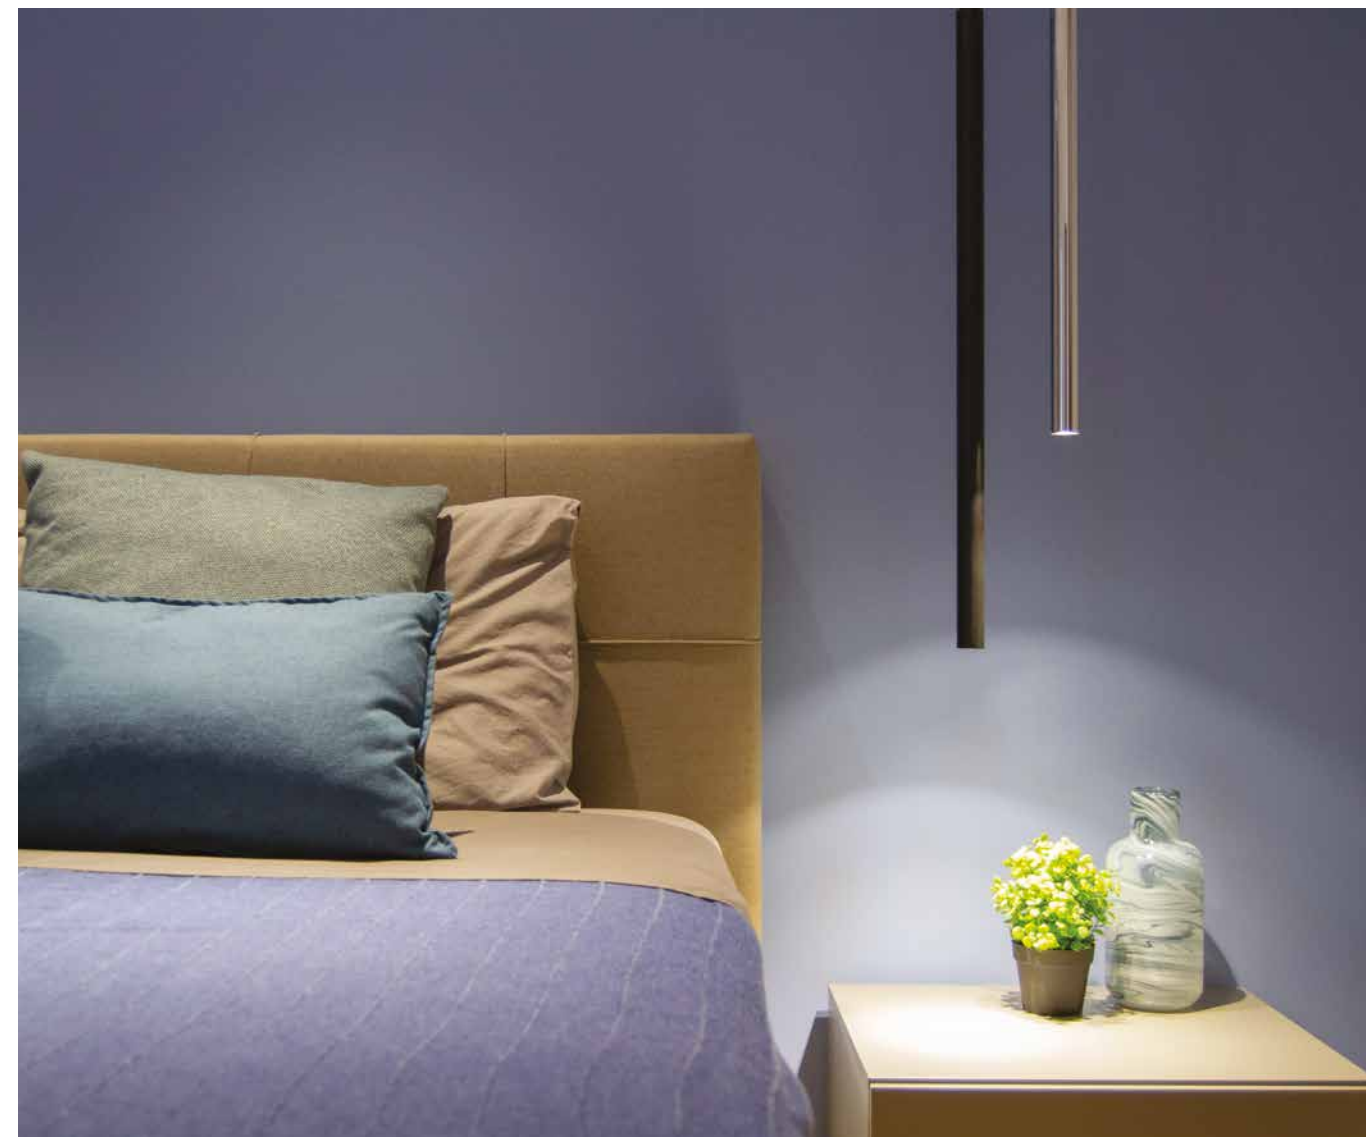



INDOOR

Linea

Design U.T. EgoLucé




LINEA creates a new way of illuminating and understanding light. A linear lighting system without any interruption. IP40 modular system, with diffused light for recessed installations and small-size structure in coextruded methacrylate. Different modular lengths are possible, from 4,7" up to 118,8", in three shades of light: 2700K, 3000K, and 4000K with CRI>90. Upon request, we prepare fixtures with angled cuts and other light tones.

LINEA crea una nueva forma de iluminar y entender la luz. Un sistema de iluminación lineal ininterrumpido. Sistema modular IP40, con luz difusa para empotrar y pequeña estructura de metacrilato coextrusionado. Son posibles diferentes longitudes modulares, de 4.7" a 118.8", en tres colores de luz: 2700K, 3000K y 4000K con CRI>90. Bajo pedido, preparamos luminarias con cortes en ángulo y otros colores de luz.




Linea

Design U.T. EGOLUCE



Linea

Design U.T. EGOLUCE

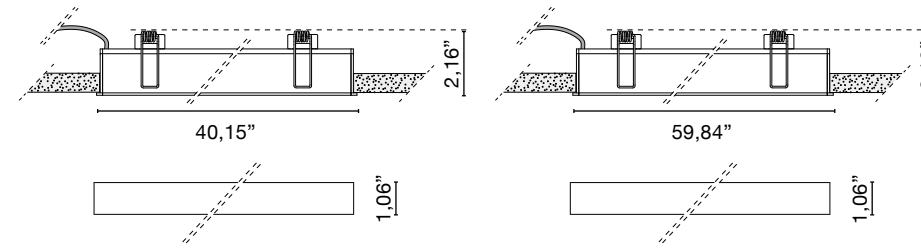

6615... / ... 1.10 lb

.01 White - Blanco

/W	4000K	LED 15W CRI>90	1840lm
/WW	3000K	LED 15W CRI>90	1650lm
/XW	2700K	LED 15W CRI>90	1560lm




6616... / ... 3.31 lb

.01 White - Blanco

/W	4000K	LED 22.5W CRI>90	2760lm
/WW	3000K	LED 22.5W CRI>90	2475lm
/XW	2700K	LED 22.5W CRI>90	2340lm



EXAMPLES EJEMPLOS

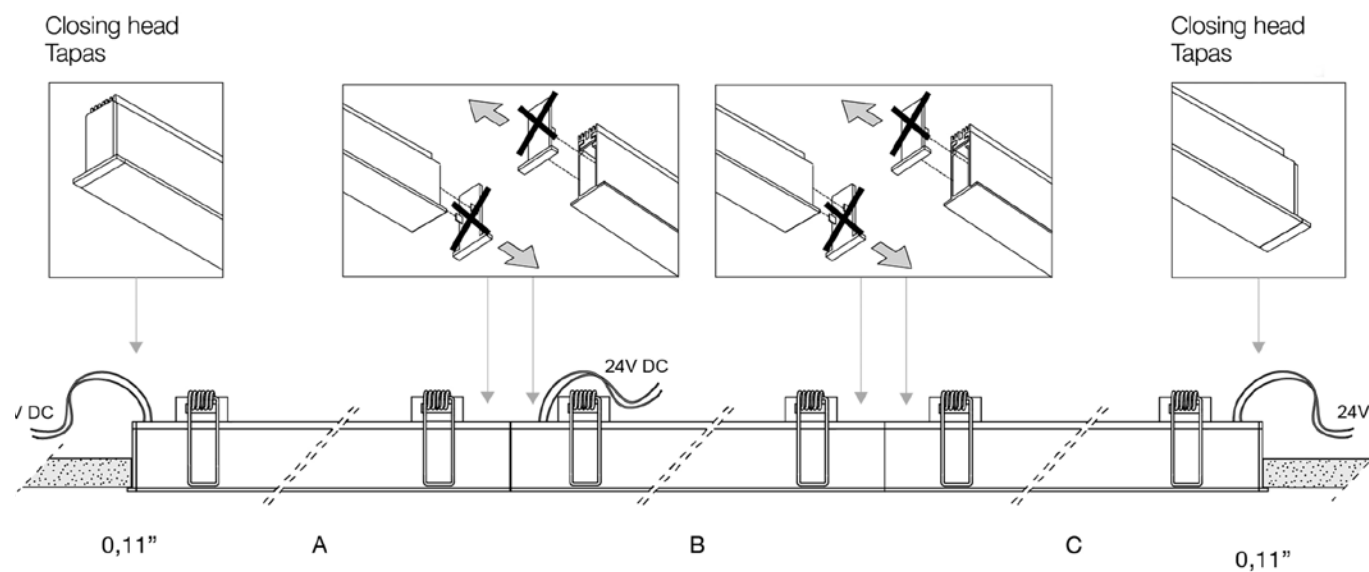

A B C = Lamps lenght without closing heads. *Longitud de las lámparas sin tapas.*

CUSTOM SIZE


inches	watt	2700K (XW)	lm	3000K (WW)	lm	4000K (W)	lm
4.72"	1.5W	A6615.01/10/XW	156	A6615.01/10/WW	165	A6615.01/10/W	184
8.66"	3W	A6615.01/20/XW	312	A6615.01/20/WW	330	A6615.01/20/W	368
12.60"	4.5W	A6615.01/30/XW	468	A6615.01/30/WW	495	A6615.01/30/W	552
16.54"	6W	A6615.01/40/XW	624	A6615.01/40/WW	660	A6615.01/40/W	736
20.47"	7.5W	A6615.01/50/XW	780	A6615.01/50/WW	825	A6615.01/50/W	920
24.41"	9W	A6615.01/60/XW	936	A6615.01/60/WW	990	A6615.01/60/W	1104
28.35"	10.5W	A6615.01/70/XW	1092	A6615.01/70/WW	1155	A6615.01/70/W	1288
32.28"	12W	A6615.01/80/XW	1248	A6615.01/80/WW	1320	A6615.01/80/W	1472
36.22"	13.5W	A6615.01/90/XW	1404	A6615.01/90/WW	1485	A6615.01/90/W	1656
40.16"	15W	6615.01/XW *	1560	6615.01/WW *	1650	6615.01/W *	1840
44.09"	16.5W	A6615.01/110/XW	1716	A6615.01/110/WW	1815	A6615.01/110/W	2024
48.03"	18W	A6615.01/120/XW	1872	A6615.01/120/WW	1980	A6615.01/120/W	2208
51.97"	19.5W	A6615.01/130/XW	2028	A6615.01/130/WW	2145	A6615.01/130/W	2392
55.91"	21W	A6615.01/140/XW	2184	A6615.01/140/WW	2310	A6615.01/140/W	2576
59.84"	22.5W	6616.01/XW *	2340	6616.01/WW *	2475	6616.01/W *	2760
63.78"	24W	A6615.01/160/XW	2496	A6615.01/160/WW	2640	A6615.01/160/W	2944
67.72"	25.5W	A6615.01/170/XW	2652	A6615.01/170/WW	2805	A6615.01/170/W	3128
71.65"	27W	A6615.01/180/XW	2808	A6615.01/180/WW	2970	A6615.01/180/W	3312
75.59"	28.5W	A6615.01/190/XW	2964	A6615.01/190/WW	3135	A6615.01/190/W	3496
79.53"	30W	A6615.01/200/XW	3120	A6615.01/200/WW	3300	A6615.01/200/W	3680
83.46"	31.5W	A6615.01/210/XW	3276	A6615.01/210/WW	3465	A6615.01/210/W	3864
87.40"	33W	A6615.01/220/XW	3432	A6615.01/220/WW	3630	A6615.01/220/W	4048
91.34"	34.5W	A6615.01/230/XW	3588	A6615.01/230/WW	3795	A6615.01/230/W	4232
95.28"	36W	A6615.01/240/XW	3744	A6615.01/240/WW	3960	A6615.01/240/W	4416
99.21"	37.5W	A6615.01/250/XW	3900	A6615.01/250/WW	4125	A6615.01/250/W	4600

Linea

Design U.T. EGOLUCE



ACCESSORIES ACCESORIOS

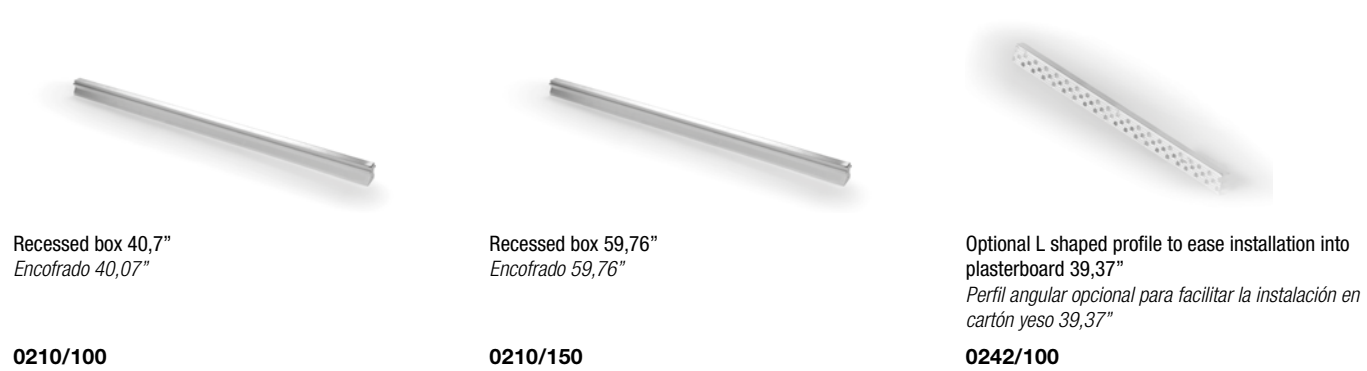

Recessed box 40,7"
Encofrado 40,07"

0210/100

Recessed box 59,76"
Encofrado 59,76"

0210/150

Optional L shaped profile to ease installation into
plasterboard 39,37"
Perfil angular opcional para facilitar la instalación en
cartón yeso 39,37"

0242/100

DRIVERS CONDUCTORES

U0160/24



IN:120-277V OUT:24V-60W

U0161/24

IN:120-277V OUT:24V-100W

Linea

Design U.T. EGOLUCE

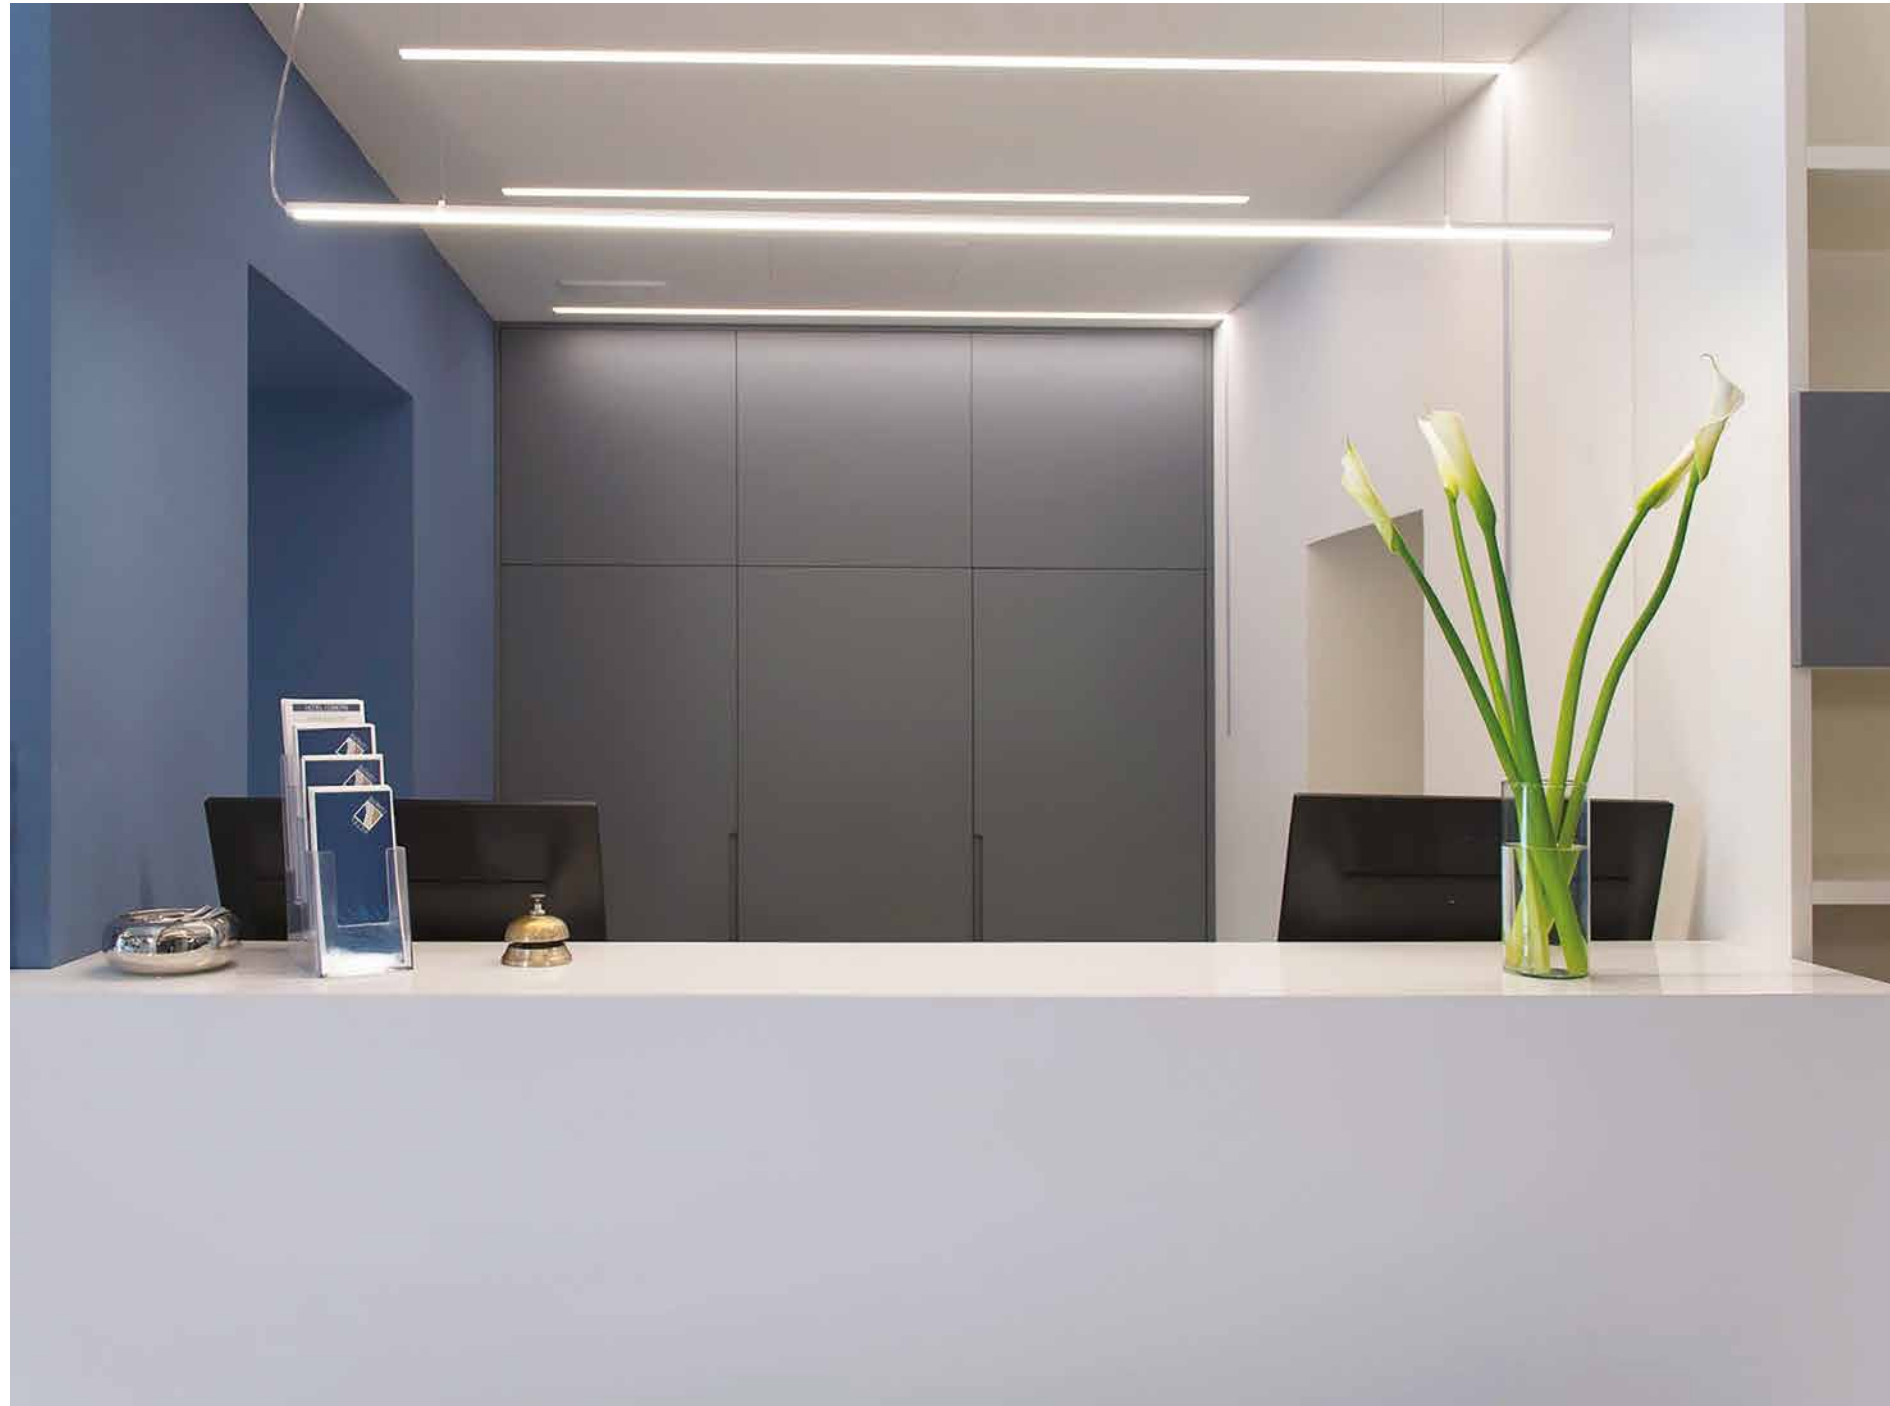

Project Studio Keyart Milano



Project Studio Keyart Milano

Linea

Design U.T. EGOLUCE



Ph. Flavio Ricci



INDOOR / OUTDOOR

Joy

Design: Officina di Architettura e Design




The IP65 lamp collection is characterized by a variety of accessories and sources that can help you create countless lighting solutions for any aesthetic or lighting technology need. By assembling the individual parts through the joints, you can create: - stakes/poles - wall lamps - path markers - illuminated handrails and so on. Joints of light are the easiest and quickest way to assemble your lamp according to your ideas and needs.

La colección de lámparas IP65 se caracteriza por una gran variedad de accesorios y fuentes de luz que permiten crear innumerables soluciones de iluminación para cualquier requisito estético o lumínico. Al ensamblar las piezas individuales mediante juntas, es posible crear - postes - lámparas de pared - marcadores de ruta - pasamanos iluminados, etc. Las uniones ligeras son la forma más rápida y sencilla de montar su lámpara según sus ideas y requisitos.

Joy



Design Officina di Architettura e Design

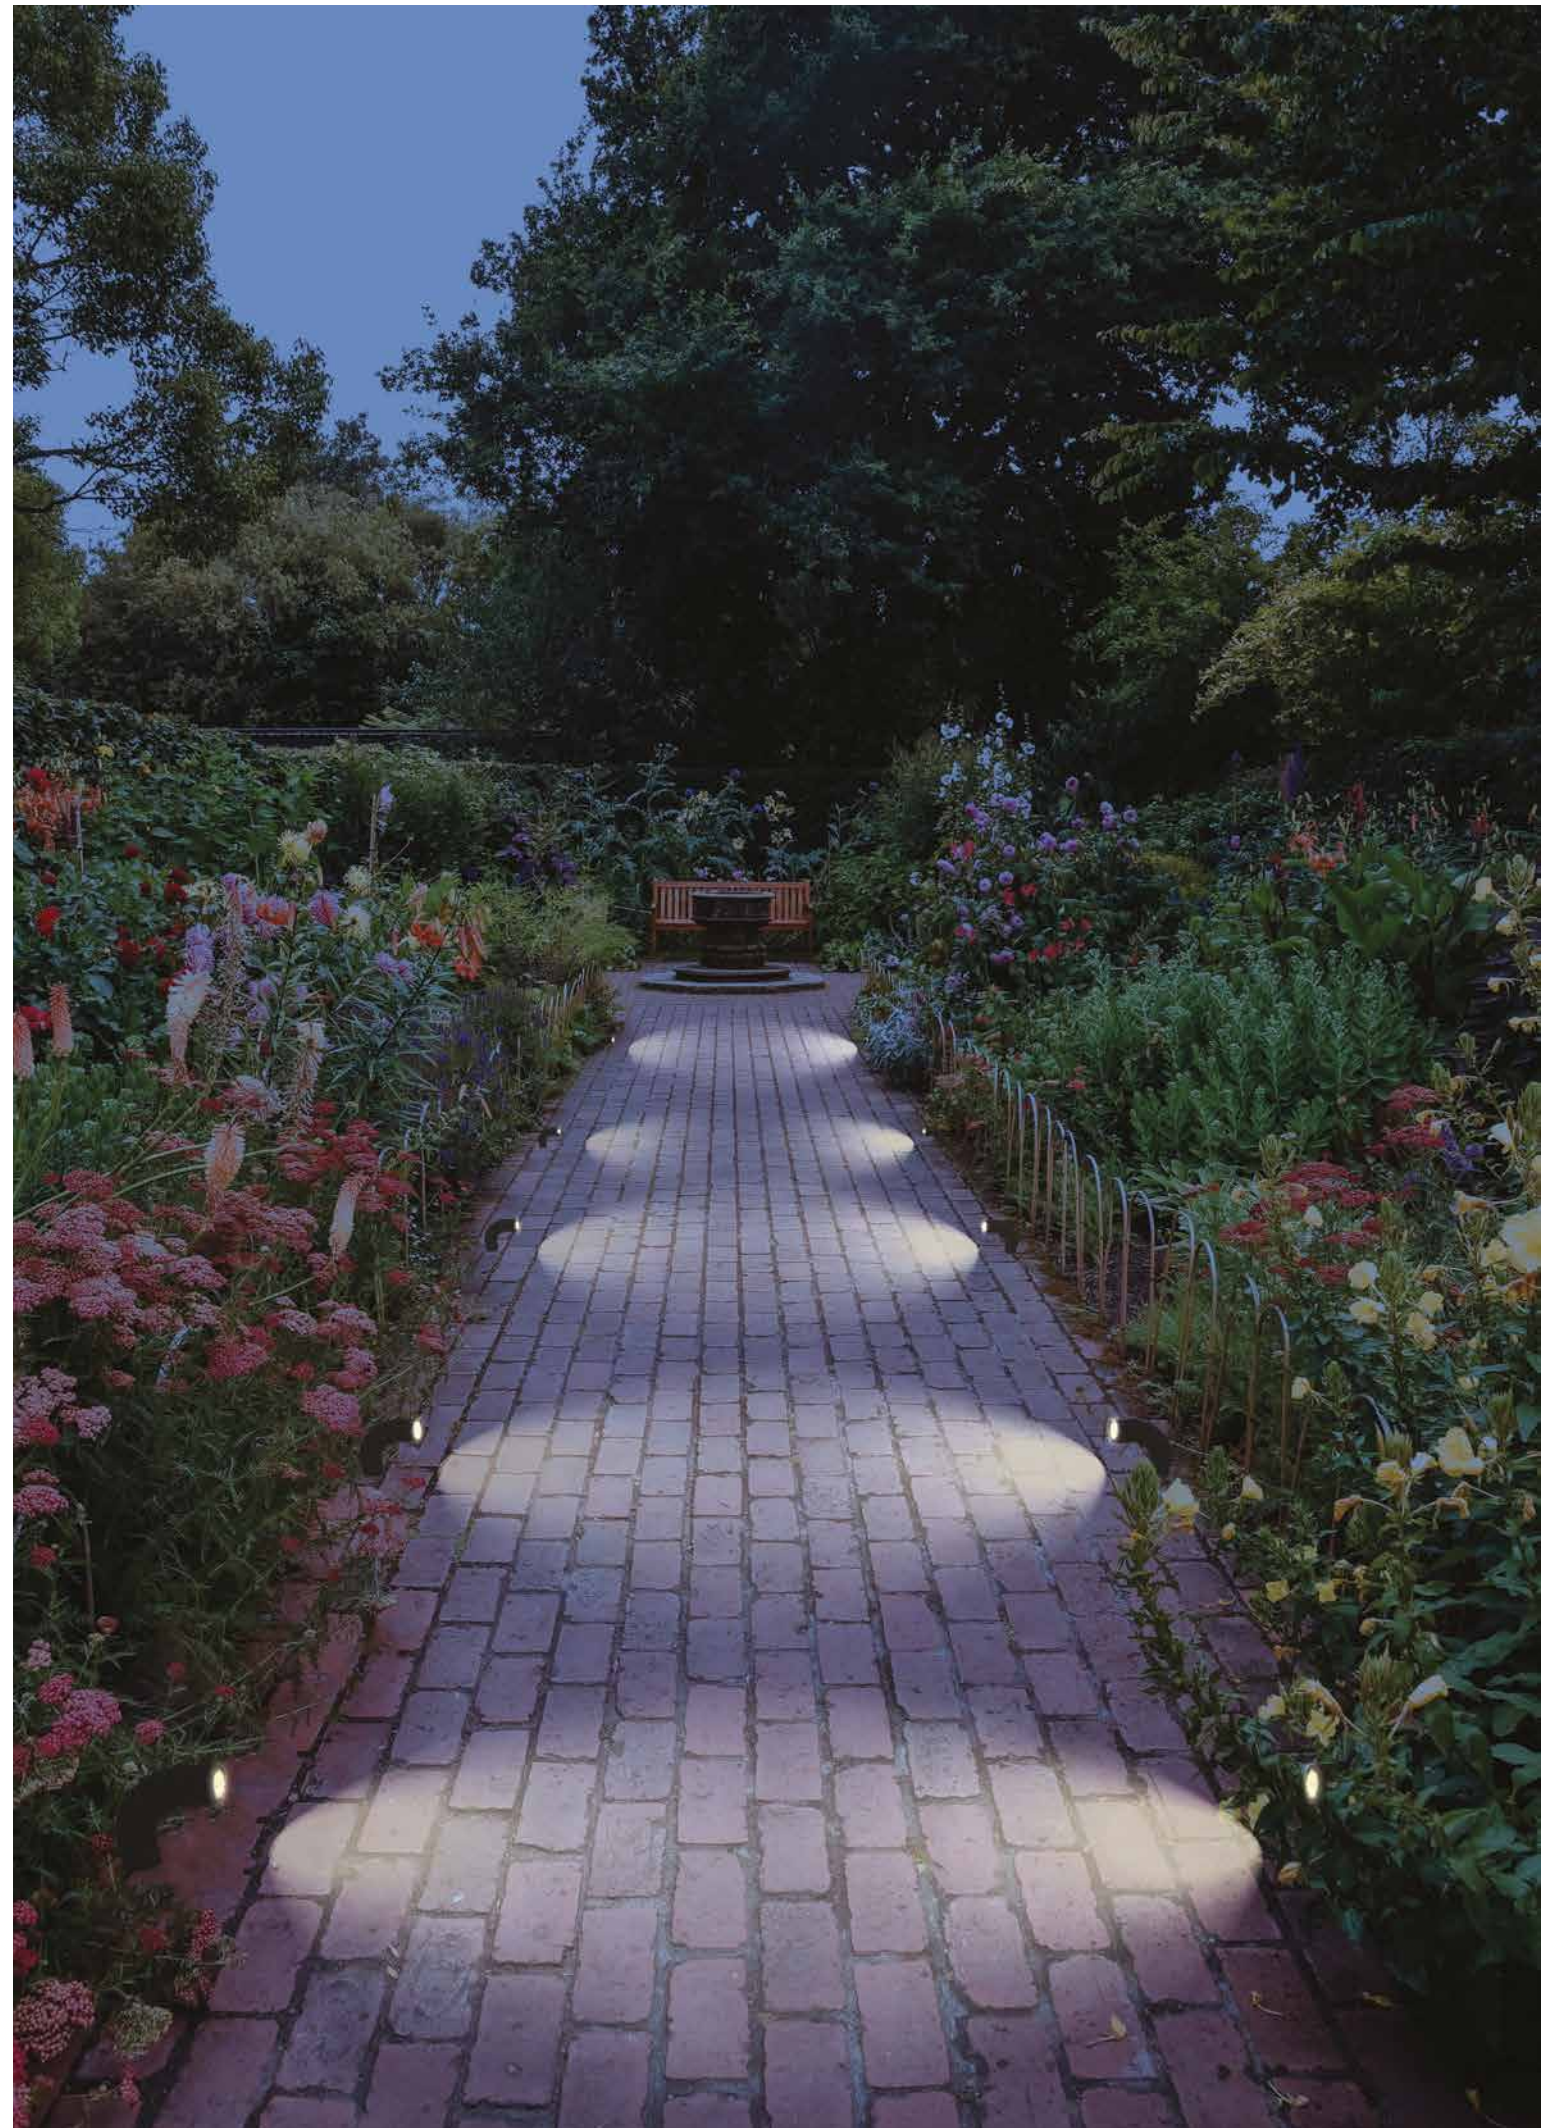




Joy

Design Officina di Architettura e Design

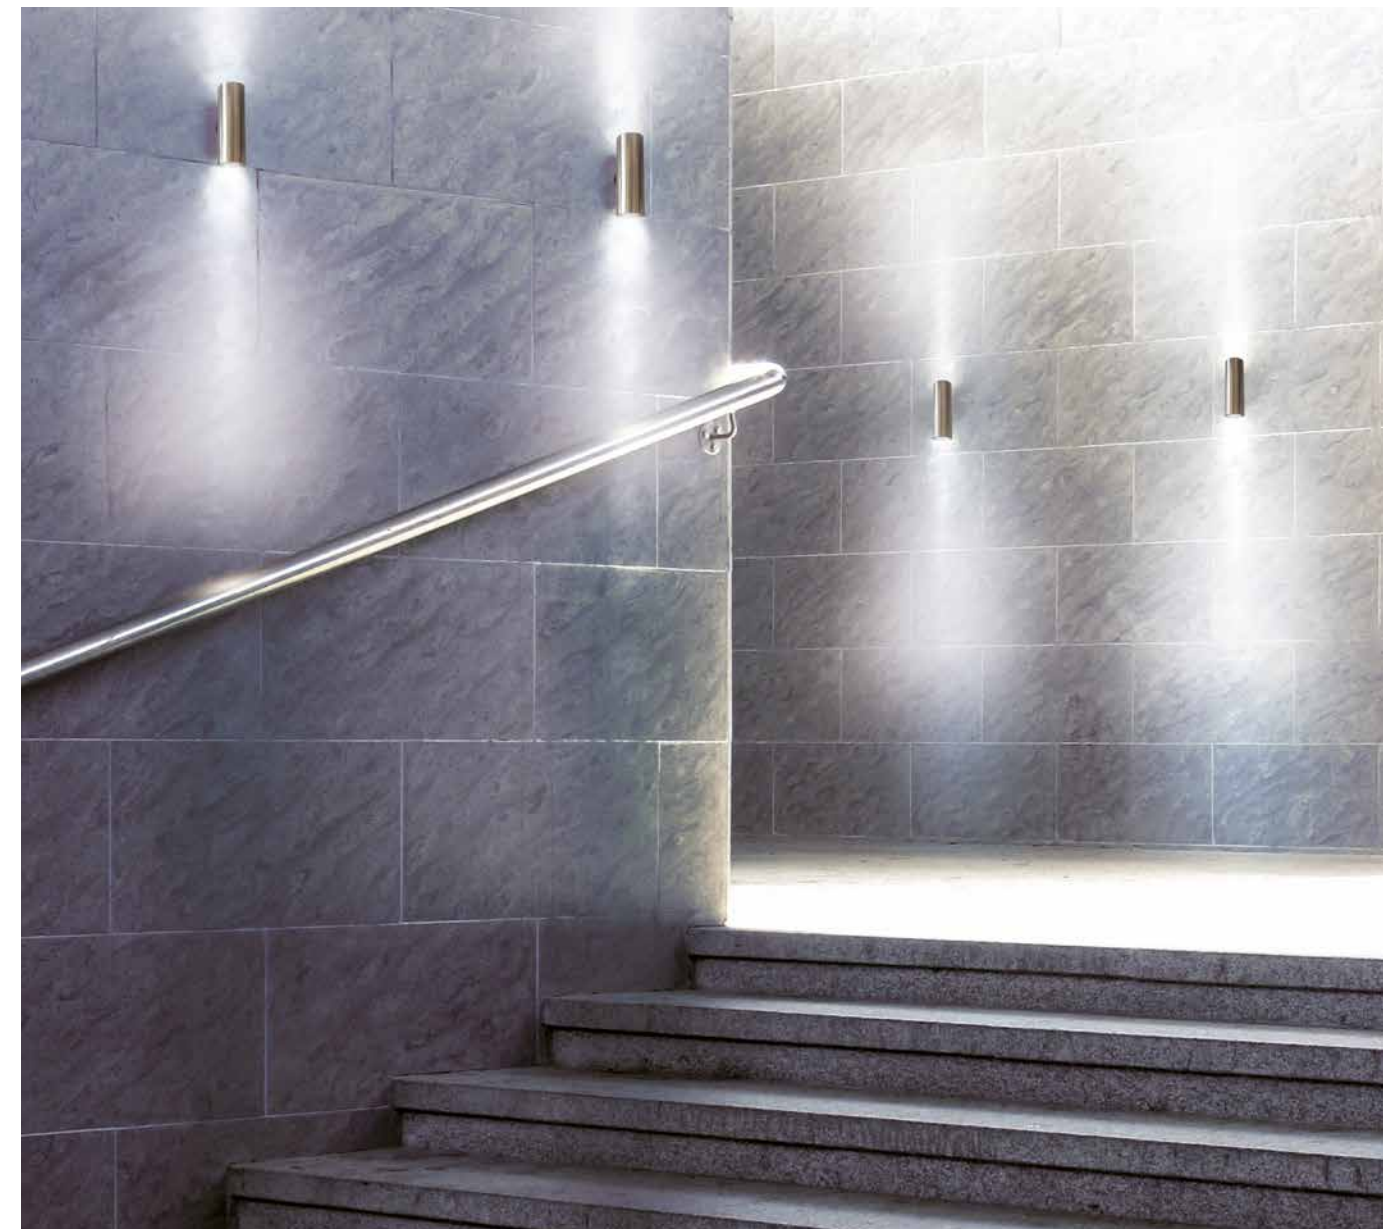

Joy

Design Officina di Architettura e Design



7516._ _ / _ _ 0.18 lb

.45 ■ Aluminium anodized - *Aluminio anodizado*


/W 4000K LED MAX 1,5W CRI>90 500mA 221lm

/WW 3000K LED MAX 1,5W CRI>90 500mA 210lm

/XW 2700K LED MAX 1,5W CRI>90 500mA 199lm




SYSTEM ELEMENTS ELEMENTOS DEL SISTEMA

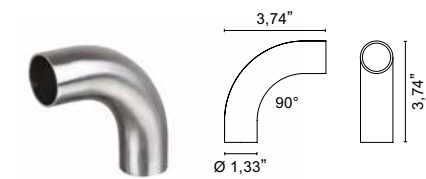

90° expanding bend
Curva de mandril de 90°

7500._ _


- .01 ■ White - *Blanco*
- .02 ■ Black - *Negro*
- .06 ■ Green - *Verde*
- .33 ■ Stainless steel AISI 316L - *Acero cepillado*
- .34 ■ Painted corten finishing - *Corten pintado*

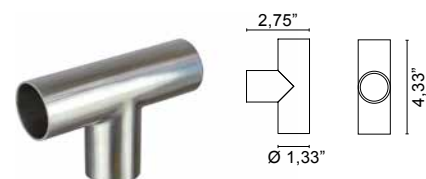

T joint expanding bend
Junta en T con mandril

7501._ _


- .01 ■ White - *Blanco*
- .02 ■ Black - *Negro*
- .06 ■ Green - *Verde*
- .33 ■ Stainless steel AISI 316L - *Acero cepillado*
- .34 ■ Painted corten finishing - *Corten pintado*

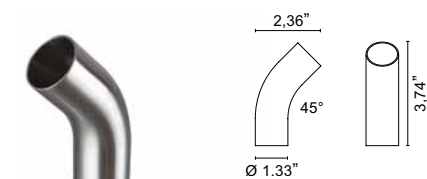

45° expanding bend
Curva de sujeción de 45

7504._ _

- .01 ■ White - *Blanco*
- .02 ■ Black - *Negro*
- .06 ■ Green - *Verde*
- .33 ■ Stainless steel AISI 316L - *Acero cepillado*
- .34 ■ Painted corten finishing - *Corten pintado*

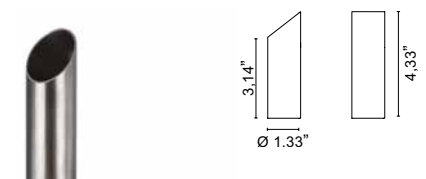

Joint with 45°
Junta cortada a 45

7505._ _

- .01 ■ White - *Blanco*
- .02 ■ Black - *Negro*
- .06 ■ Green - *Verde*
- .33 ■ Stainless steel AISI 316L - *Acero cepillado*
- .34 ■ Painted corten finishing - *Corten pintado*



Linear tube
Tubo lineal

7508._ _ / _ _

- .01 ■ White - *Blanco*
- .02 ■ Black - *Negro*
- .06 ■ Green - *Verde*
- .33 ■ Stainless steel AISI 316L - *Acero cepillado*
- .34 ■ Painted corten finishing - *Corten pintado*

/20 7,87"

/50 19,68"


/100 39,37"

/150 59,05"

ACCESSORIES ACCESORIOS




Kit: box + perforated plaster
Kit: caja + yeso perforado

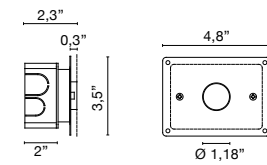

0213




Plastic Box
Caja de plastico

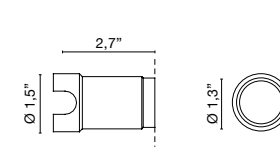

0216




Draining box
Encofrado drenante

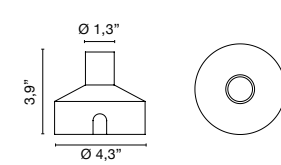

0228/R




Box + plate with steel screws
Caja + placa con tornillos de acero



0246/R



Junction element
Elemento de unión




7510._ _

- .02 ■ Black - *Negro*



Aluminium wall base with cover disc
Base mural de aluminio con disco de cubierta de base




7521._ _

- .01 ■ White - *Blanco*
- .02 ■ Black - *Negro*
- .06 ■ Green - *Verde*
- .33 ■ Stainless steel AISI 316L - *Acero cepillado*
- .34 ■ Painted corten finishing - *Corten pintado*



Base with cover disc
Base con disco de cubierta de base



7522._ _

- .01 ■ White - *Blanco*
- .02 ■ Black - *Negro*
- .06 ■ Green - *Verde*
- .33 ■ Stainless steel AISI 316L - *Acero cepillado*
- .34 ■ Painted corten finishing - *Corten pintado*

DRIVERS CONDUCTORES

0127 Drivers 500 mA - 1-6 Spot

0145 Multi-power dimmable driver PUSH - 1...10V - 1-21 Spot

0141/DIM Multi-power dimmable driver PUSH - 1...10V - 1-11 Spot

0128 Drivers 350 mA - 1-10 Spot

0141/DALI Multi-power dimmable driver PUSH - 1...10V - 1-11 Spot

0145/DALI Multi-power DALI dimmable driver - 1-21 Spot

FINISHES CODES - CÓDIGOS DE ACABADOS



.01 White
Blanco

.02 Black
Negro


.06 Green
Verde

.33 Stainless steel
AISI 316L
Acero cepillado





.34 Painted corten
finishing
Corten pintado

Joy

Design Officina di Architettura e Design



EXAMPLES OF CONFIGURATIONS EJEMPLOS DE CONFIGURACIONES

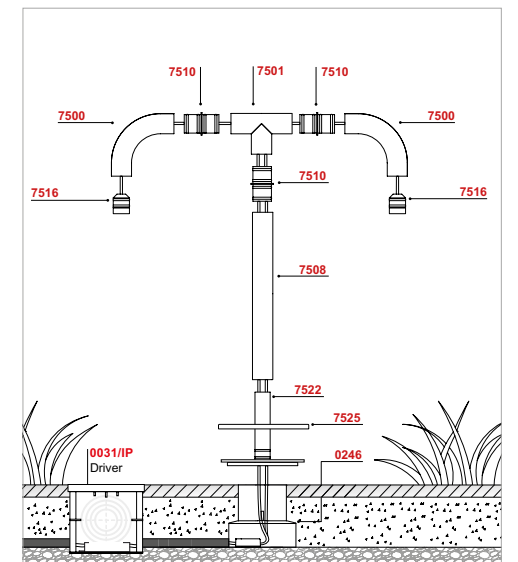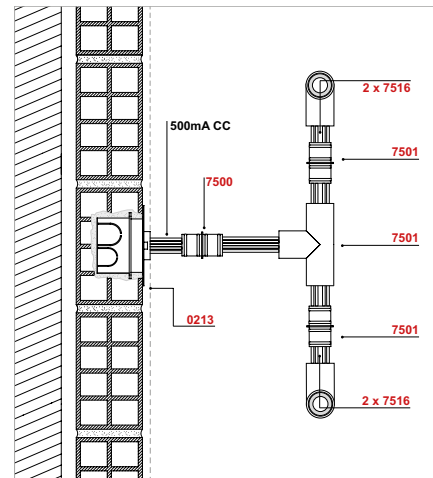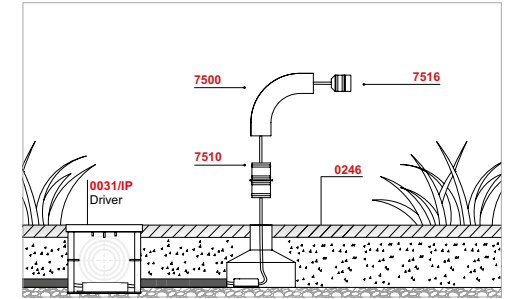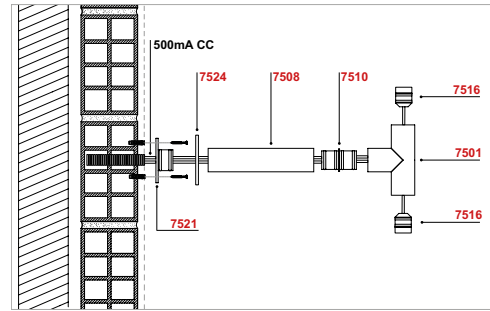


Joy

Design Officina di Architettura e Design



Joy


Design Officina di Architettura e Design

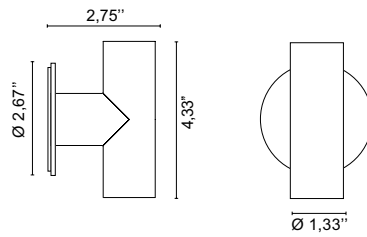

4672. / / 0.68 lb

- .01** White - Blanco
- .02** Black - Negro
- .06** Green - Verde
- .33** Stainless steel AISI 316L - Acero cepillado
- .34** Painted corten finishing - Corten pintado


/W	4000K	LED 3W	500mA	442lm
/WW	3000K	LED 3W	500mA	420lm
/XW	2700K	LED 3W	500mA	398lm

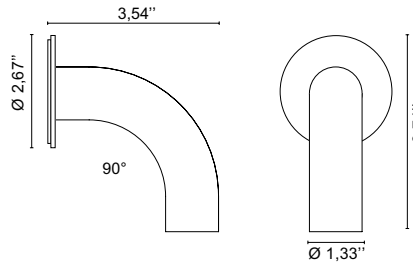

4673. / / 0.55 lb

- .01** White - Blanco
- .02** Black - Negro
- .06** Green - Verde
- .33** Stainless steel AISI 316L - Acero cepillado
- .34** Painted corten finishing - Corten pintado

/W	4000K	LED 1.5W	500mA	221lm
/WW	3000K	LED 1.5W	500mA	210lm
/XW	2700K	LED 1.5W	500mA	199lm

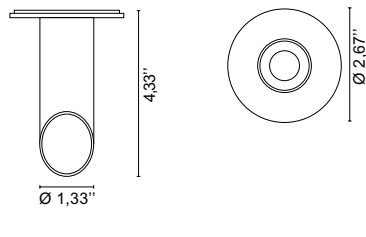

5690. / / 0.55 lb

- .01** White - Blanco
- .02** Black - Negro
- .06** Green - Verde
- .33** Stainless steel AISI 316L - Acero cepillado
- .34** Painted corten finishing - Corten pintado

/W	4000K	LED 1.5W	500mA	221lm
/WW	3000K	LED 1.5W	500mA	210lm
/XW	2700K	LED 1.5W	500mA	199lm



DRIVERS CONDUCTORES




0127

4672	1-3 pcs
4673	1-6 pcs
5690	1-6 pcs

Only serial connection - Solo conexión serie


Joy

Design Officina di Architettura e Design

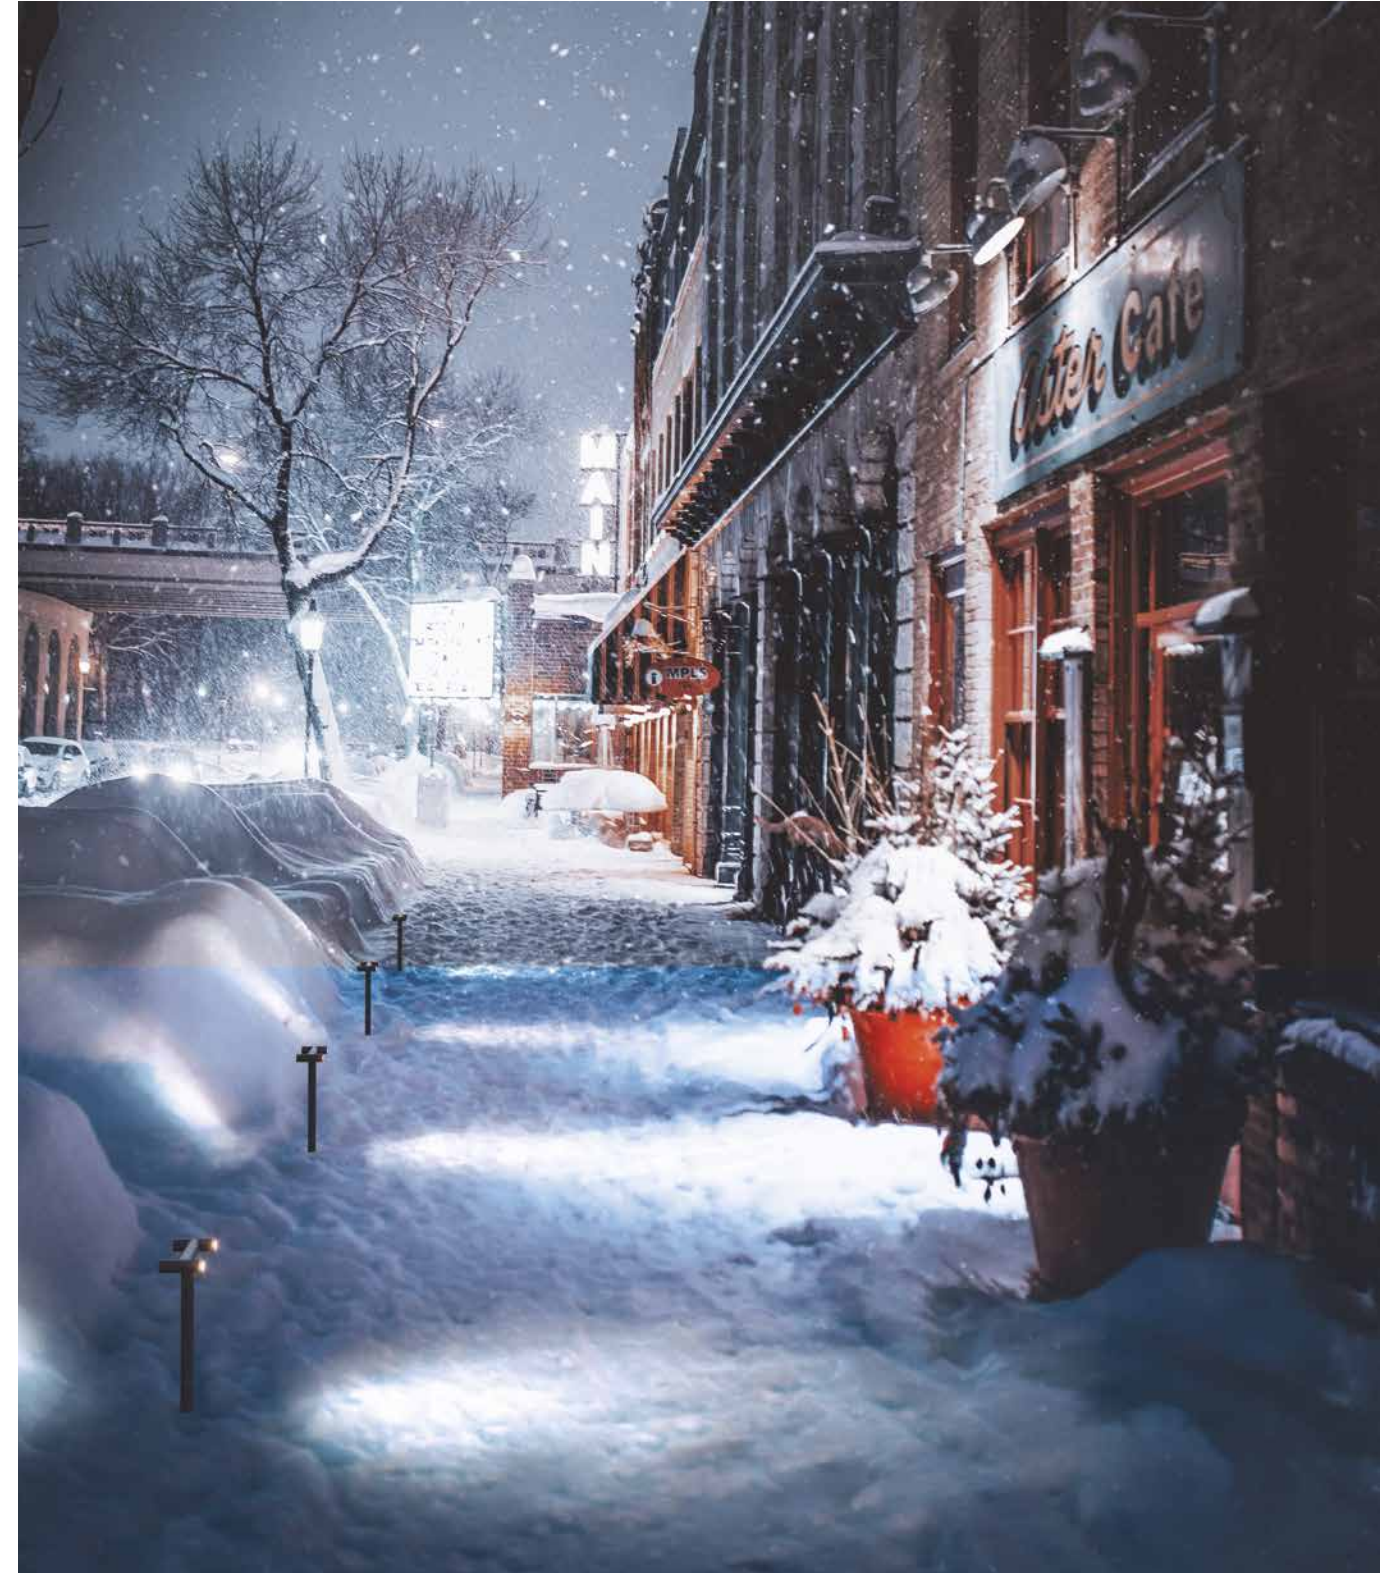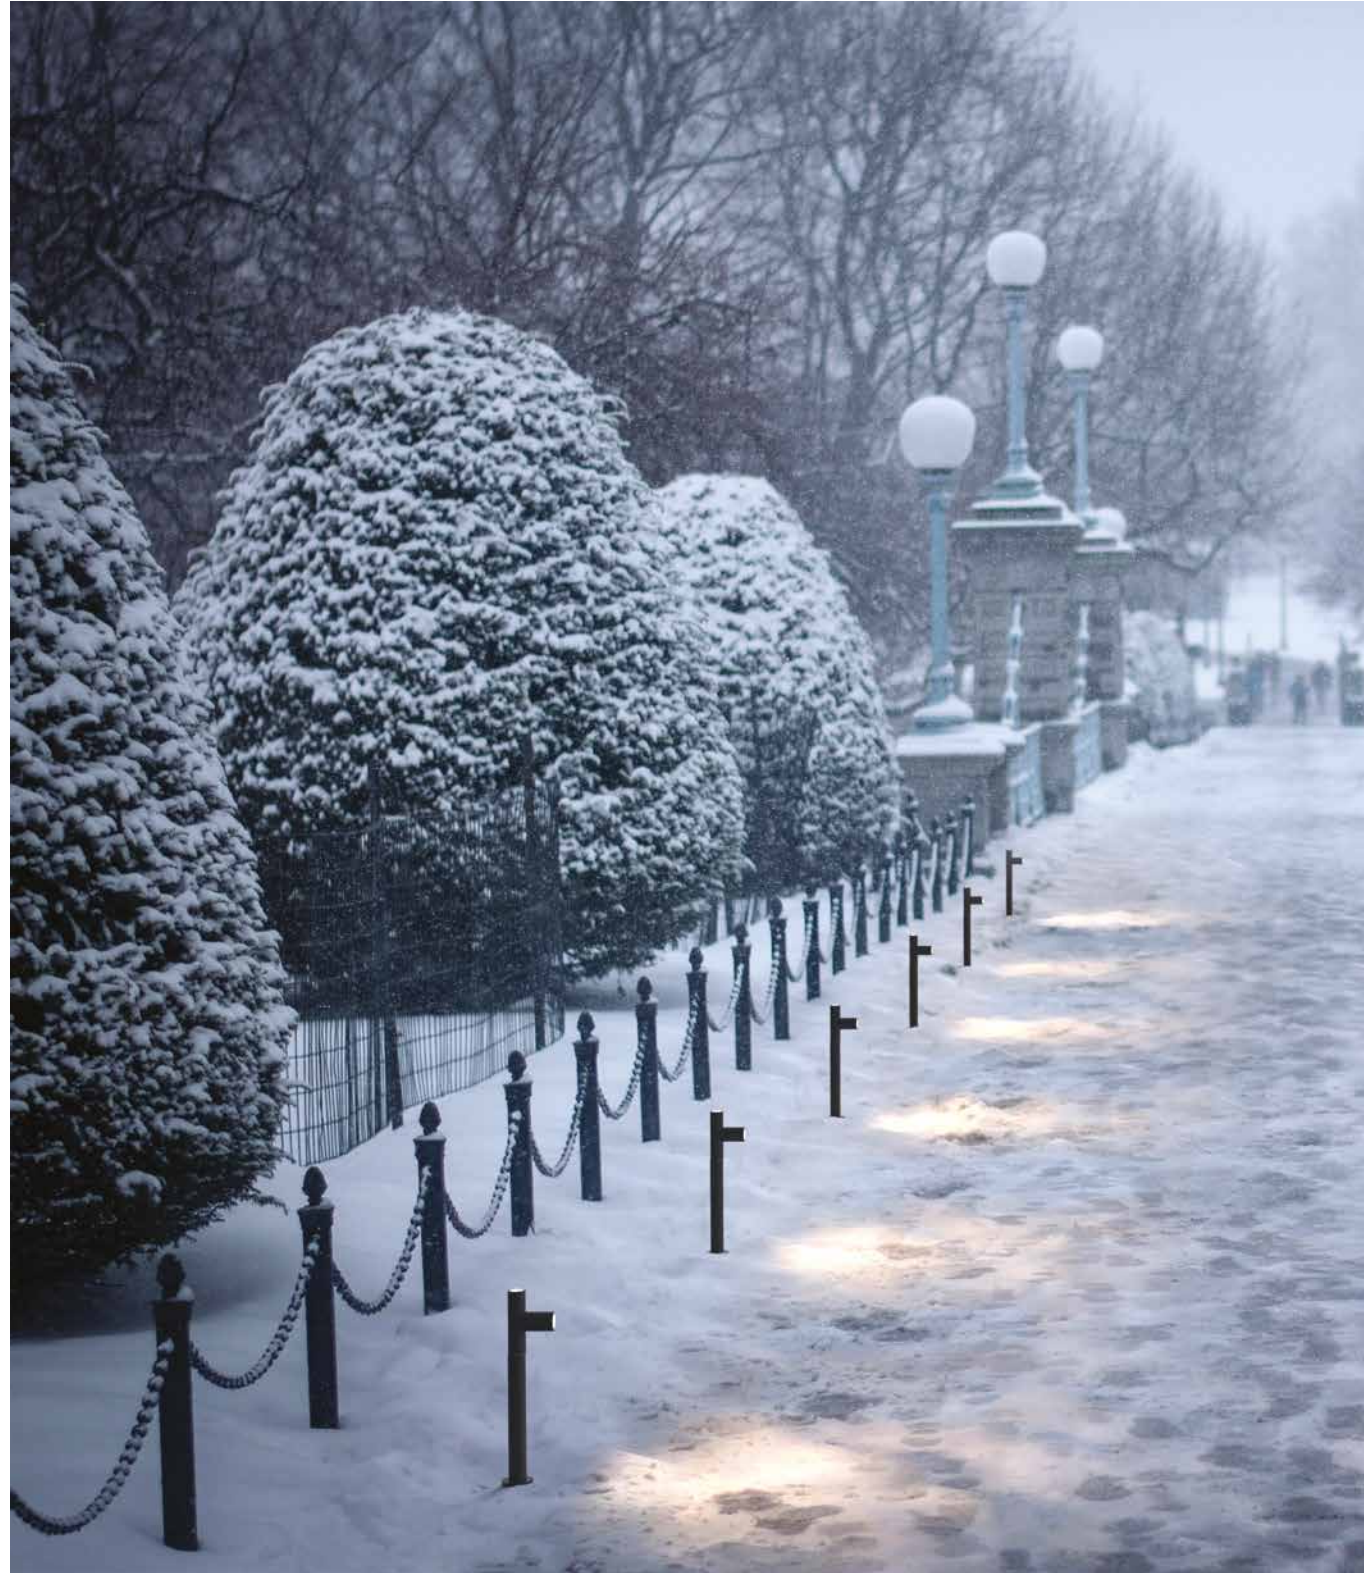


Joy


Design Officina di Architettura e Design

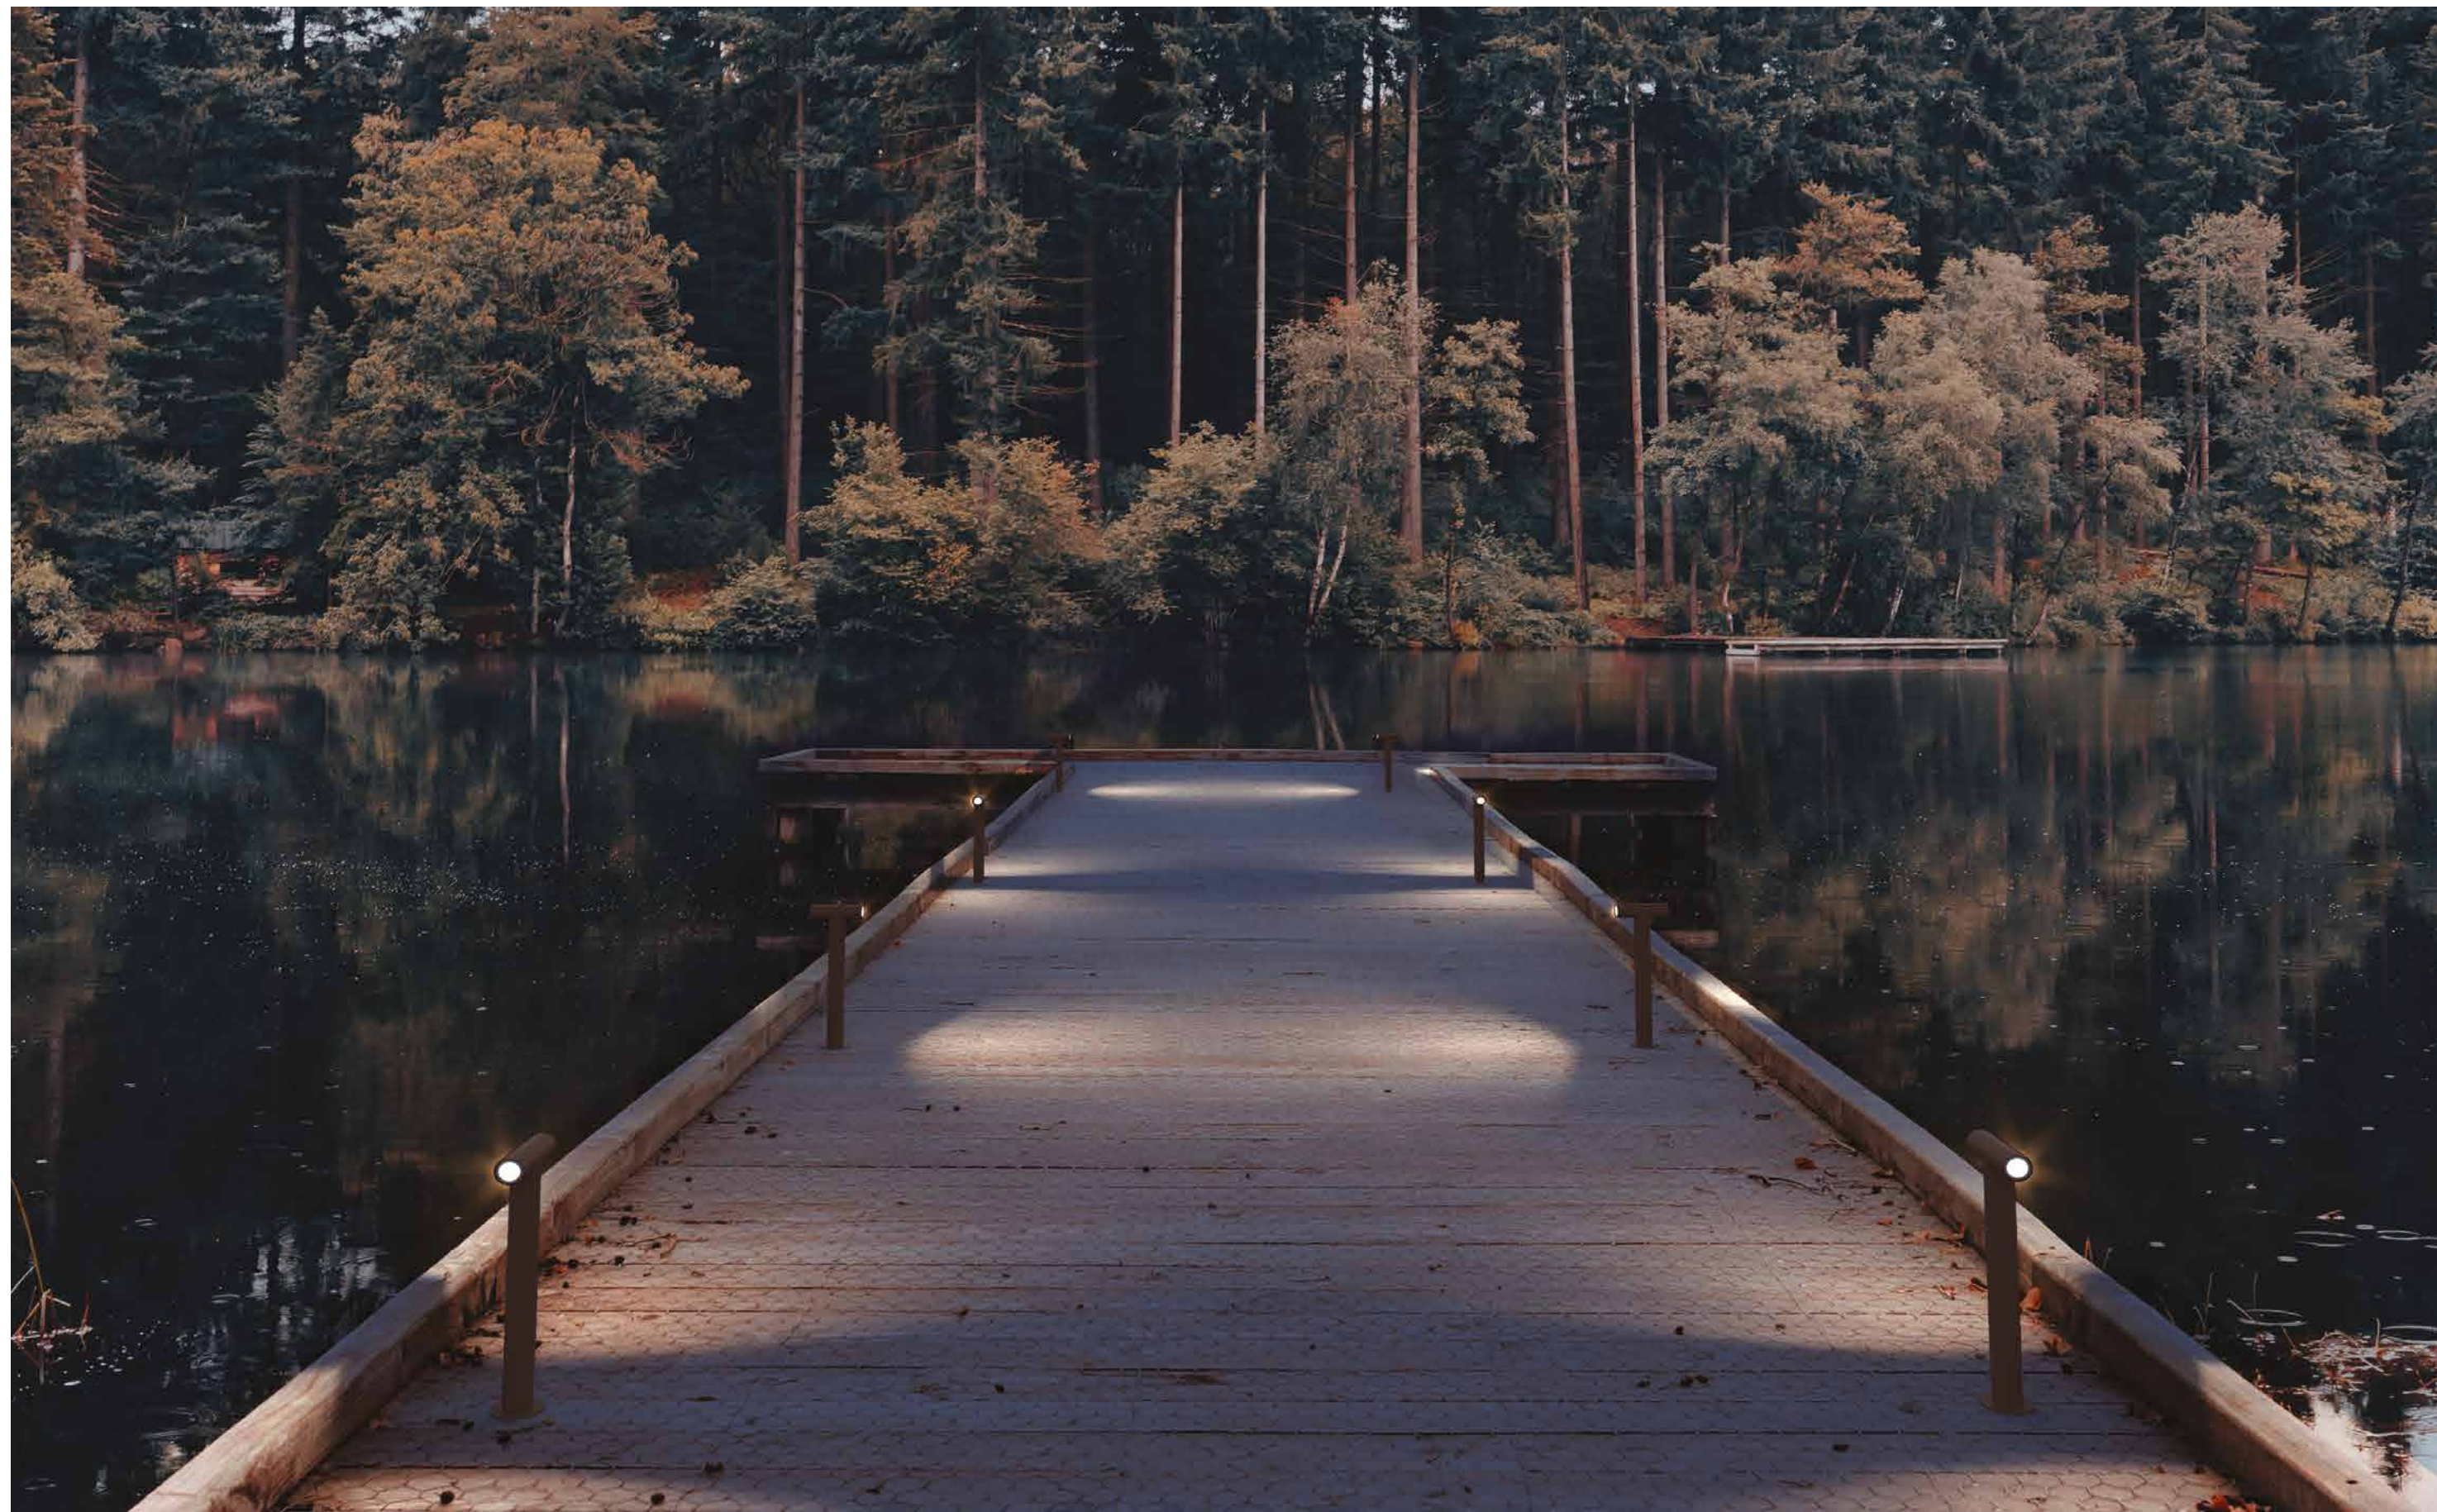







EXAMPLES OF CONFIGURATIONS EJEMPLOS DE CONFIGURACIONES

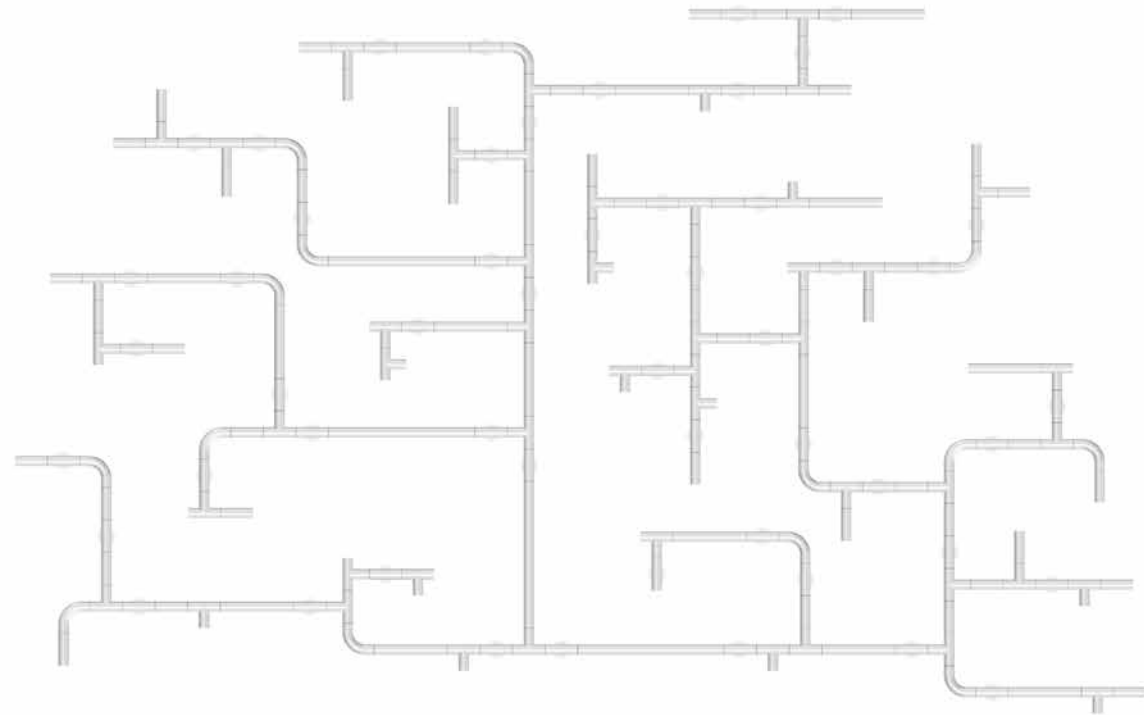


01 The light dispenser

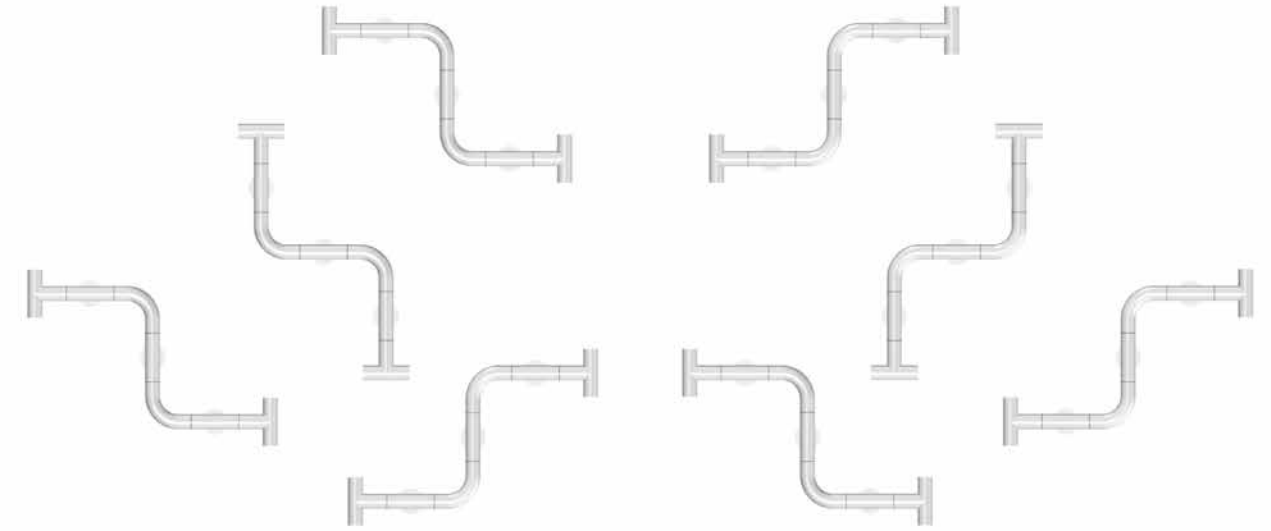

03 Medusa

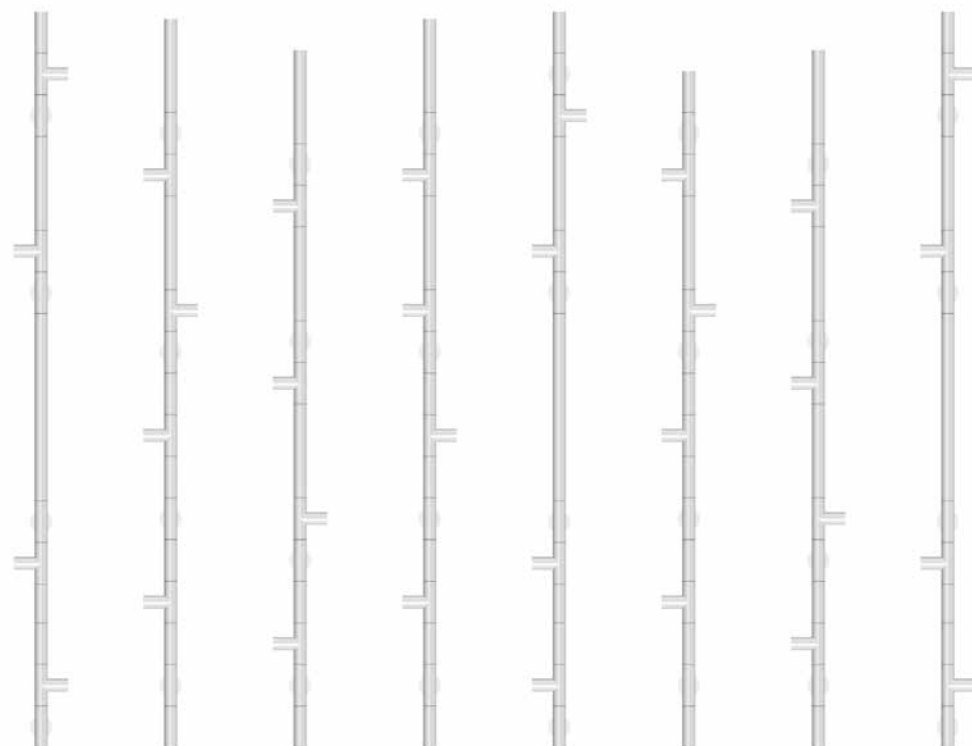

02 Forest of light

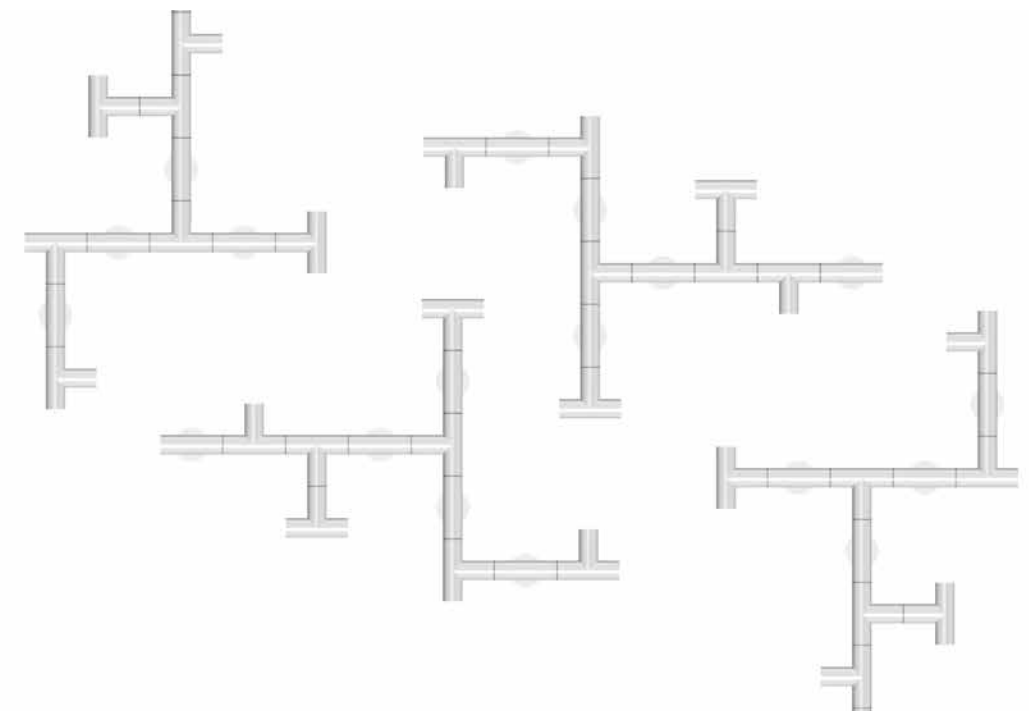

04 Swing

The minimal design combined with the innovative technology of the battery-powered portable luminaire, makes Lara an elegant and functional product. The multipurpose luminaire reflector can be used in various applications. Whether a floor, table clamp, ground stake, or rope to hang, there is no limit to your creativity. Lara can be charged a USB-C cable, with 11 hours battery life at 100% luminosity.

El diseño minimalista combinado con la innovadora tecnología de la luminaria portátil alimentada por pilas hace de Lara un producto elegante y funcional. El reflector polivalente de la luminaria puede utilizarse en diversas aplicaciones. Ya sea una abrazadera de suelo, de mesa, una estaca en el suelo o una cuerda para colgar, no hay límite para su creatividad. Lara se puede cargar con un cable USB-C, con una autonomía de 11 horas al 100% de luminosidad.

INDOOR / OUTDOOR

Lara

Design Serge Cornelissen



Lara


Design Serge Cornelissen





Lara


Design Serge Cornelissen

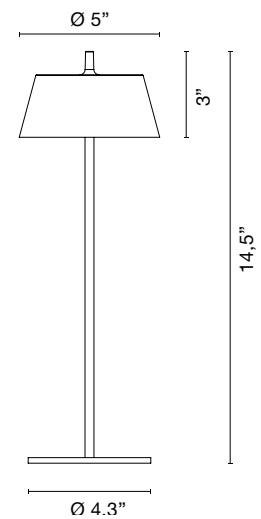

2550. _ _ 1.43 lb

- .02 ■ Black - *Negro*
- .06 ■ Green - *Verde*
- .34 ■ Painted corten finishing - *Corten pintado*
- .39 ■ Painted Anthracite finishing - *Pintado antracita*


2700-3000K LED 2.2W 120lm

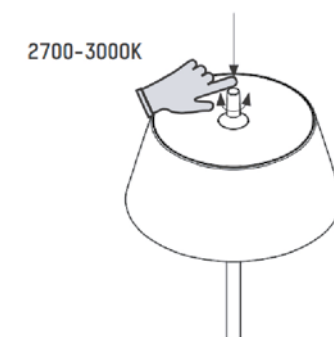

FINISHES CODES - CÓDIGOS DE ACABADOS




- .02 Black *Negro*
- .06 Green *Verde*
- .34 Rust Brown *Corten*
- .39 Anthracite *Antracita*

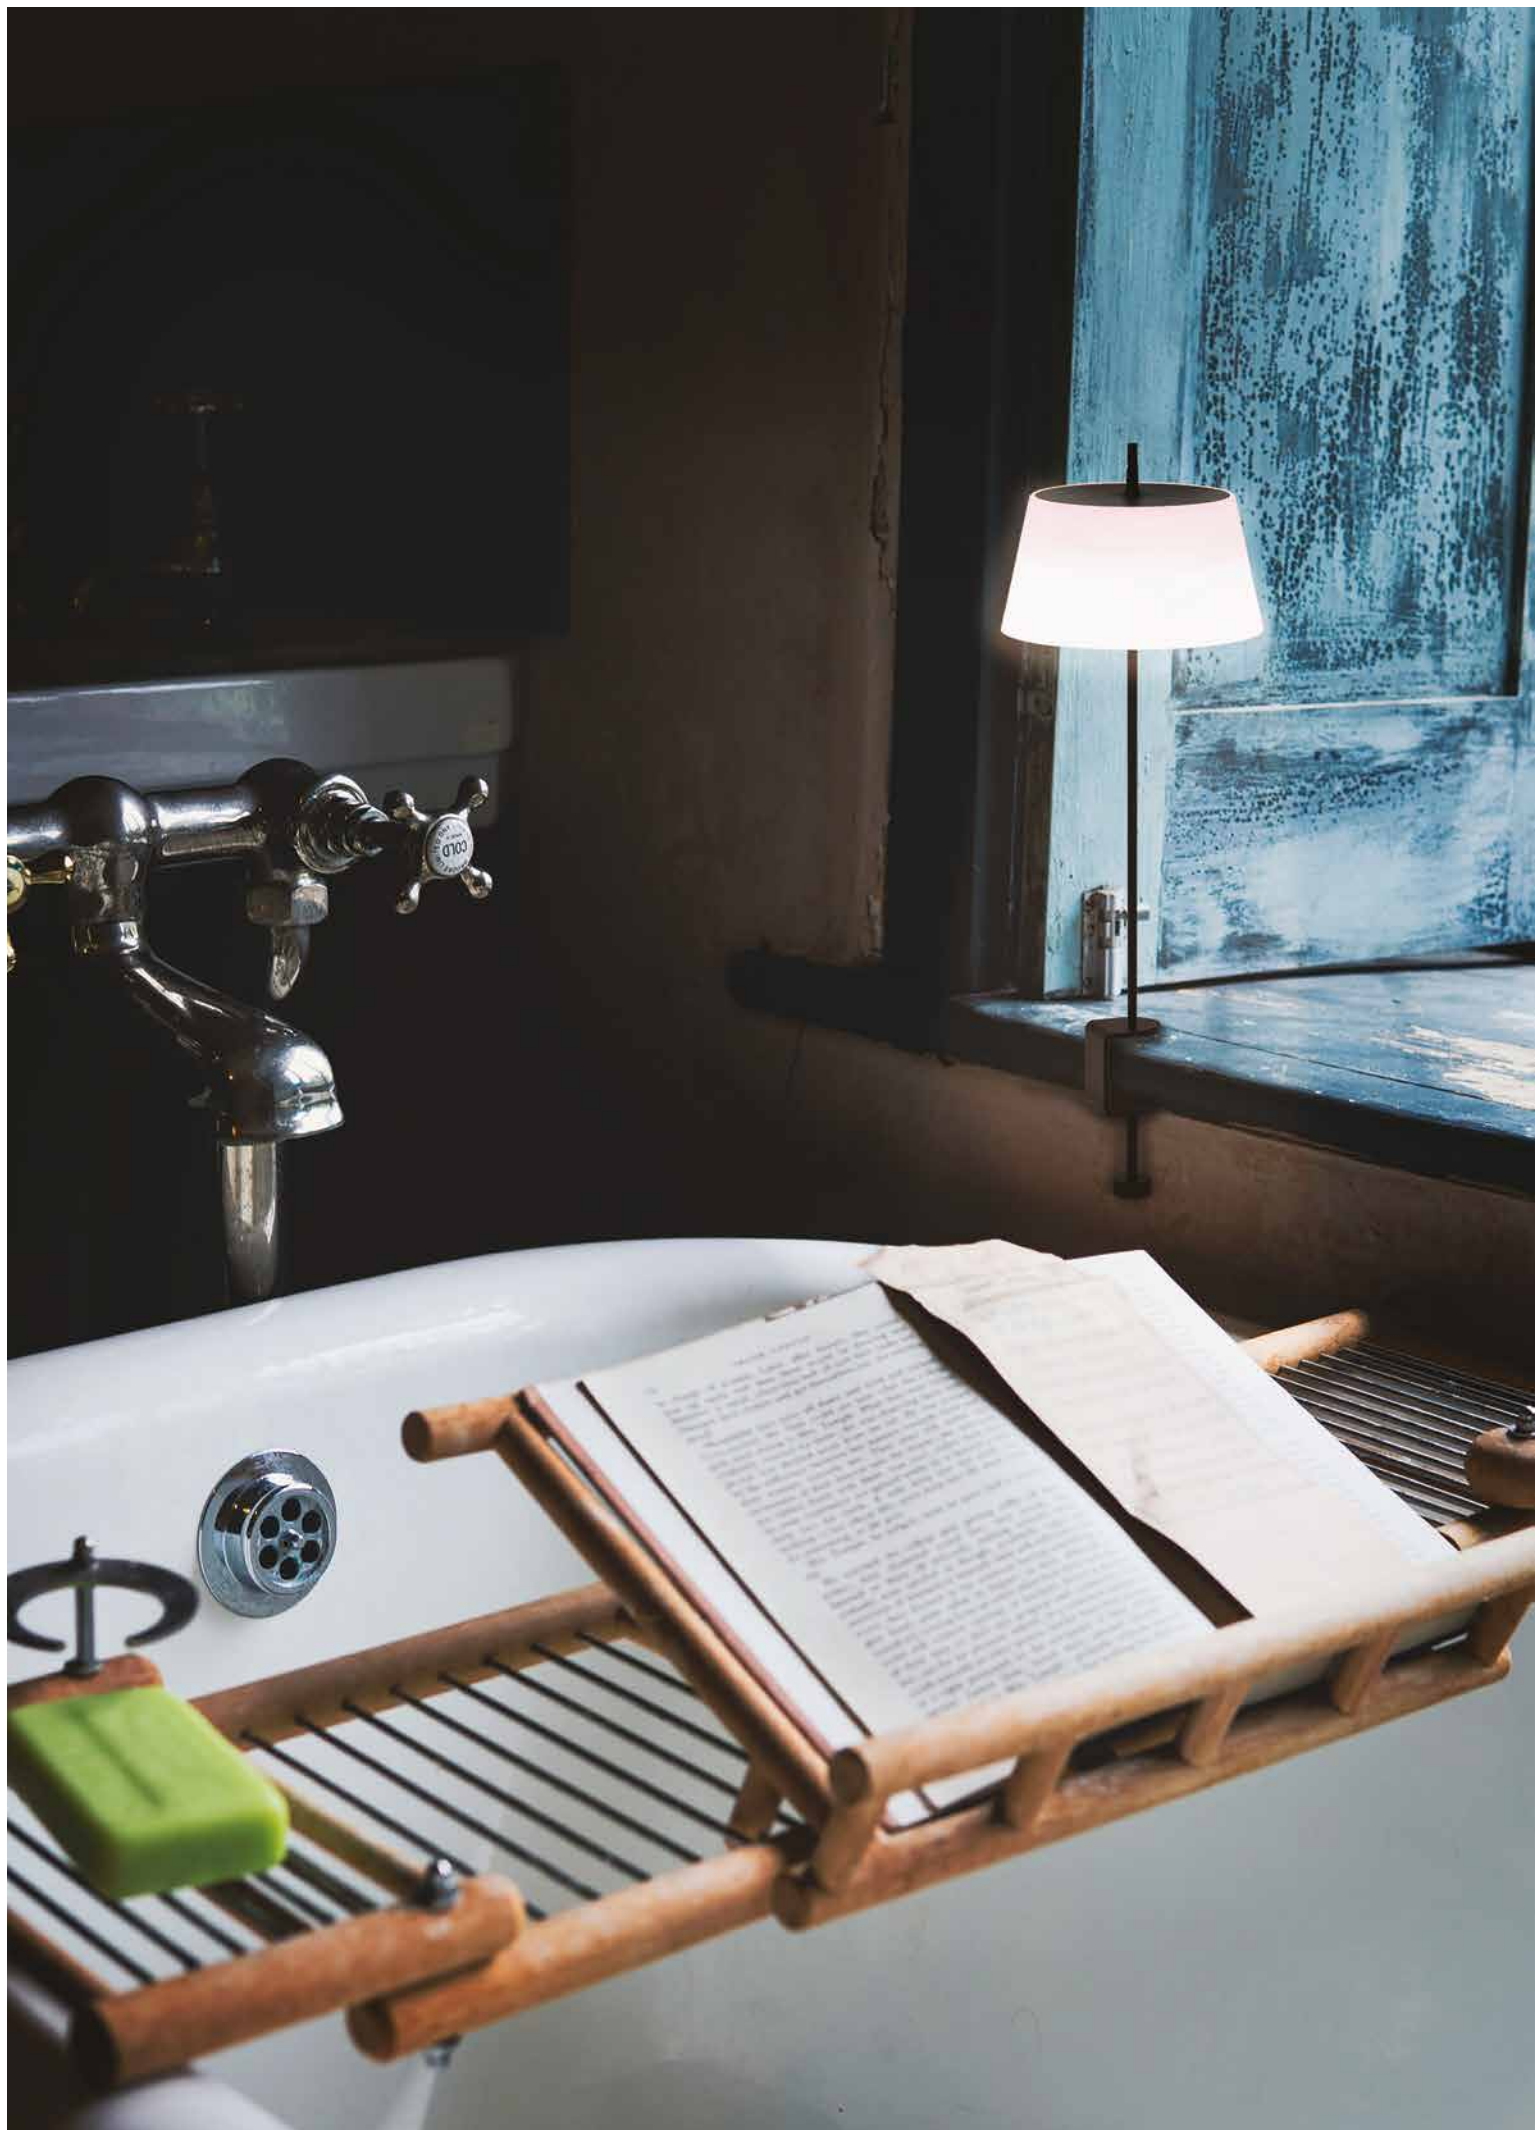

Lara Maxi


Design Serge Cornelissen

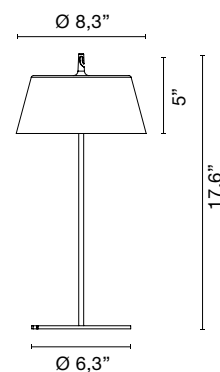

2552.02/_ _ 3.37 lb

.02 ■ Black - Negro

/WW 3000K LED 3.5W 140lm

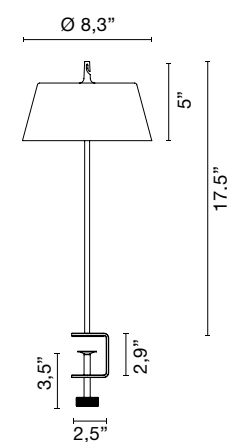

2553.02/_ _ 2.03 lb

.02 ■ Black - Negro


/WW 3000K LED 3.5W 140lm





Lara Maxi

Design Serge Cornelissen



1690. _ _ / _ _ 1.54 lb


.02 ■ Black - *Negro*

.05 ■ Red - *Rojo*

/WW 3000K LED 3.5W 140lm



FINISHES CODES - CÓDIGOS DE ACABADOS



.02 Black
Negro

.05 Red
Rojo

INDOOR / OUTDOOR


Wanda

Design U.T. EgoIuce





IP67 adjustable light bar for wall and ceiling or suspension applications with diffused light made of transparent anti-UV coextruded methacrylate and terminals in stainless steel. Wanda is offered in different modular lengths from 7.08" up to 117.33 cm and in three shades of light, 2700K, 3000K, and 4000K, with CRI>90. This simple effective illumination offers creative solutions for various environments, from offices and kitchens to outdoor poolside and gardens.

Barra de luz regulable IP67 para aplicaciones de pared, techo o colgante con luz difusa en metacrilato coextrusionado transparente anti-UV y terminales de acero inoxidable. Wanda está disponible en diferentes longitudes modulares de 7.08" cm a 117.33" y en tres colores de luz, 2700K, 3000K y 4000K, con CRI>90. Esta iluminación sencilla pero eficaz ofrece soluciones creativas para distintos entornos, desde oficinas y cocinas hasta bordes de piscinas y jardines exteriores.

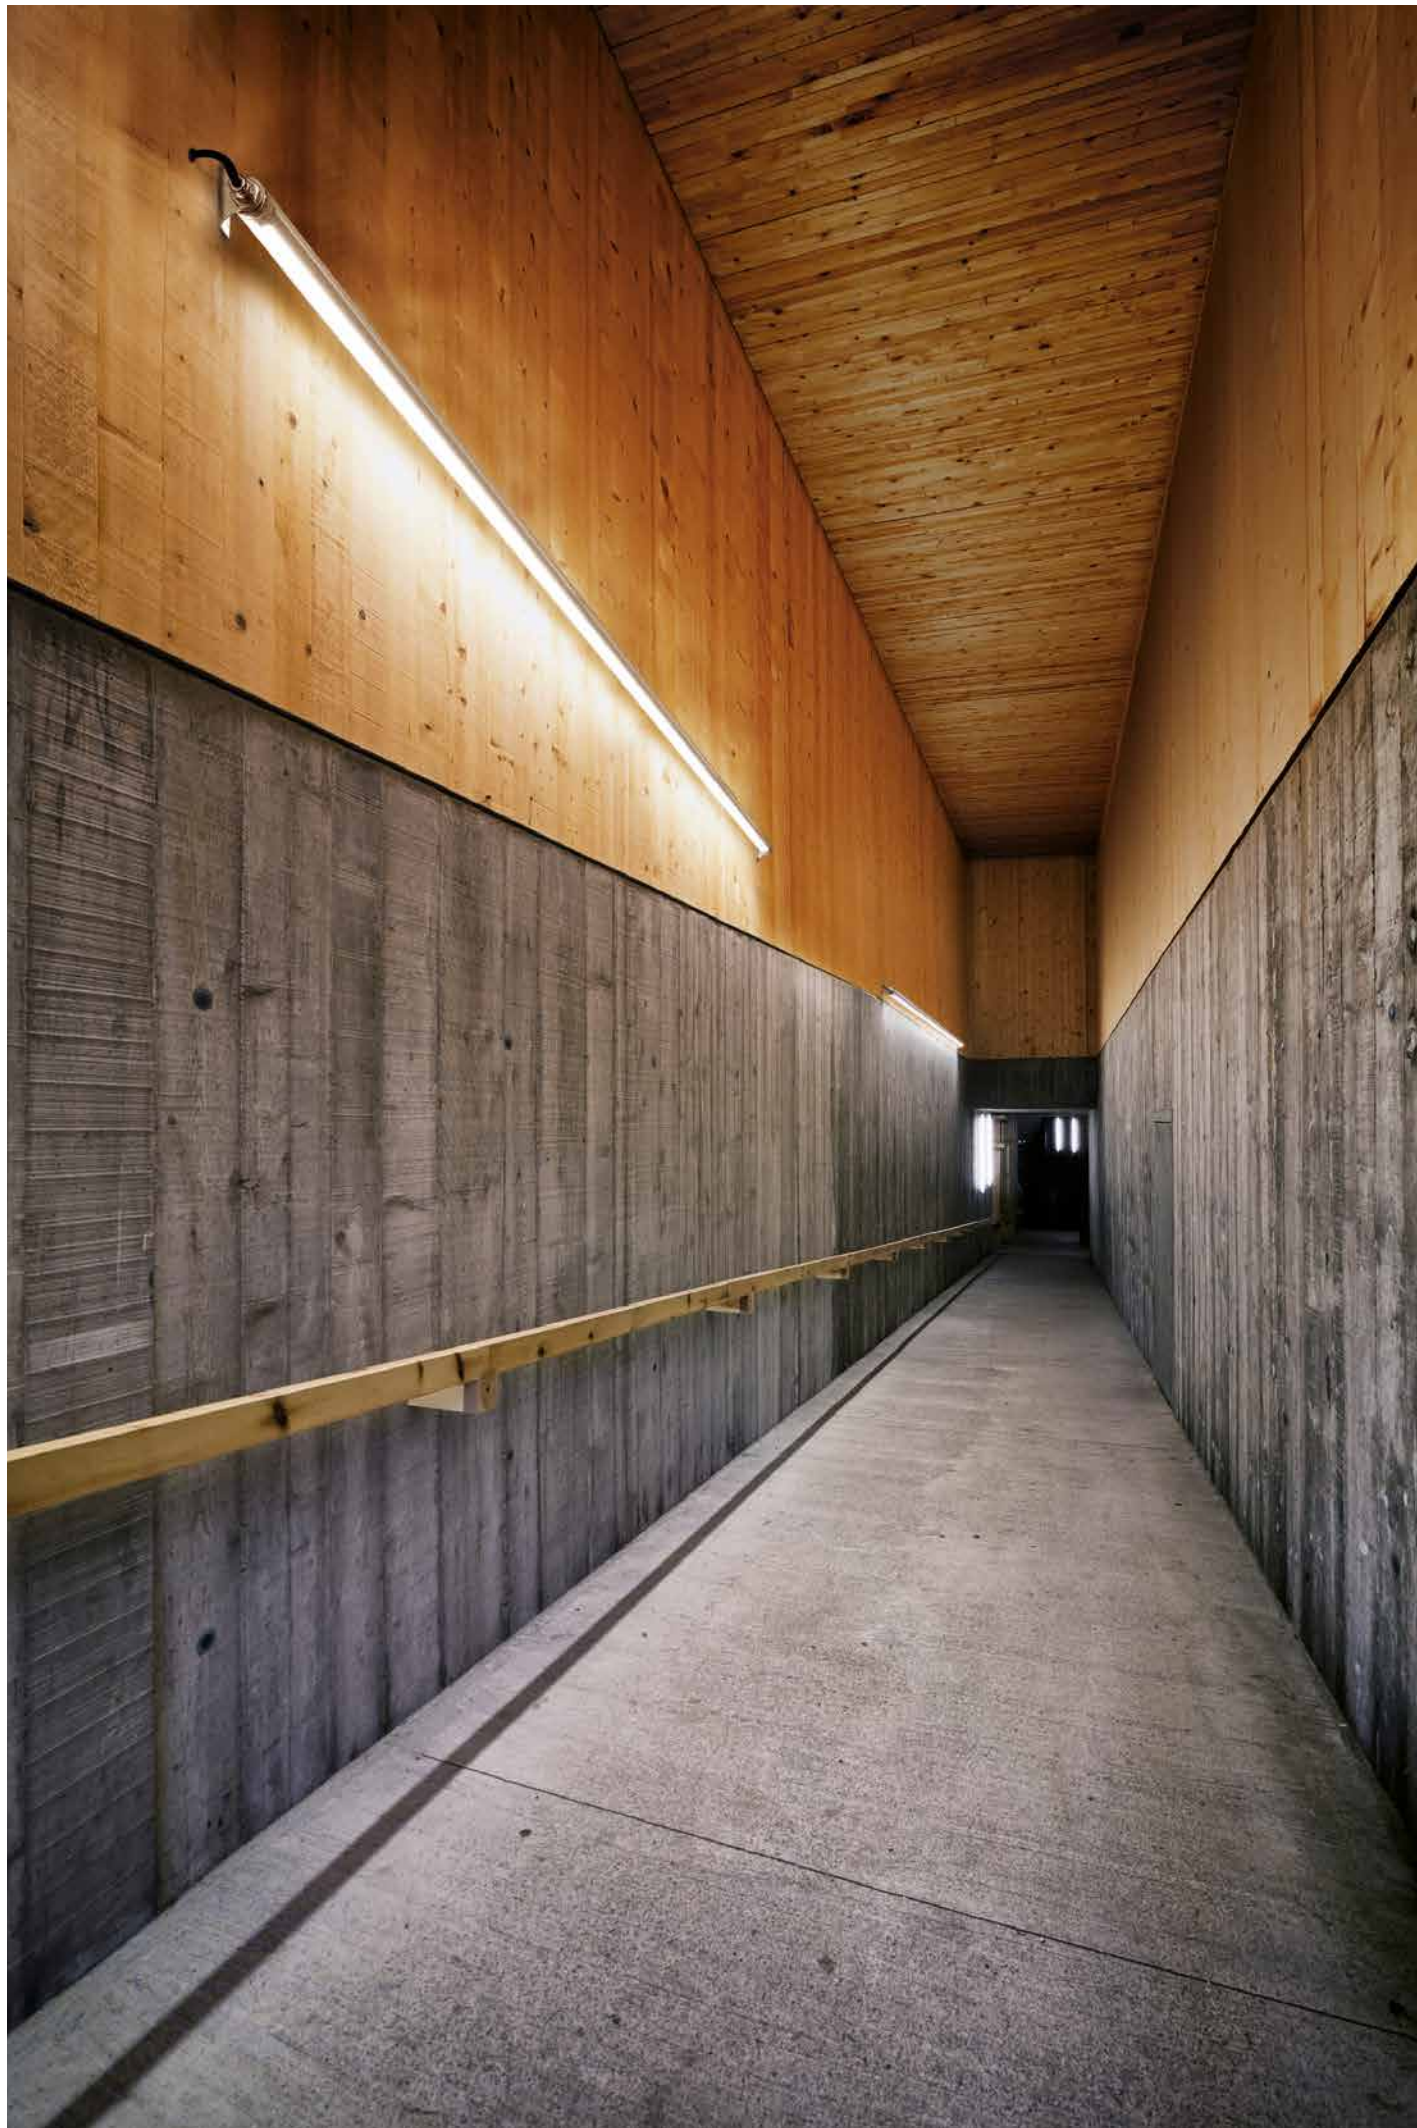



Wanda

Design U.T. EGOLUCE

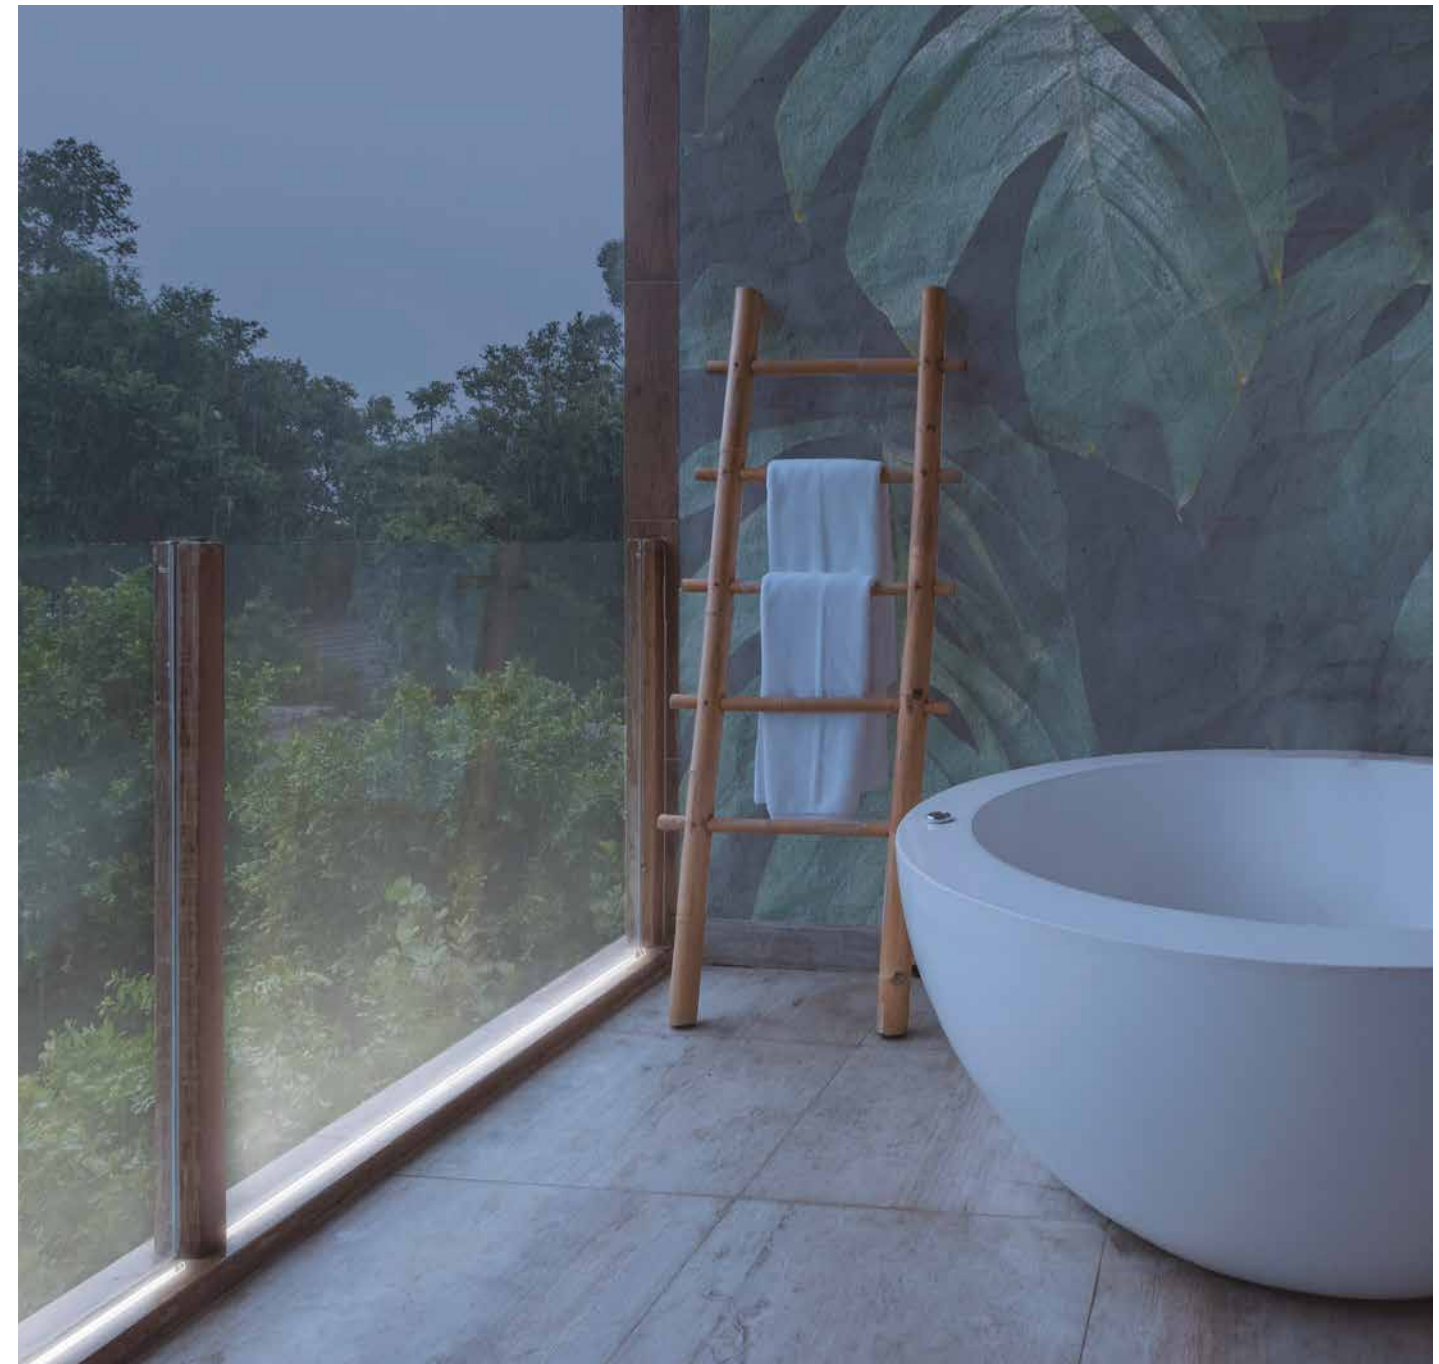

Wanda


Design U.T. EGOLUCE

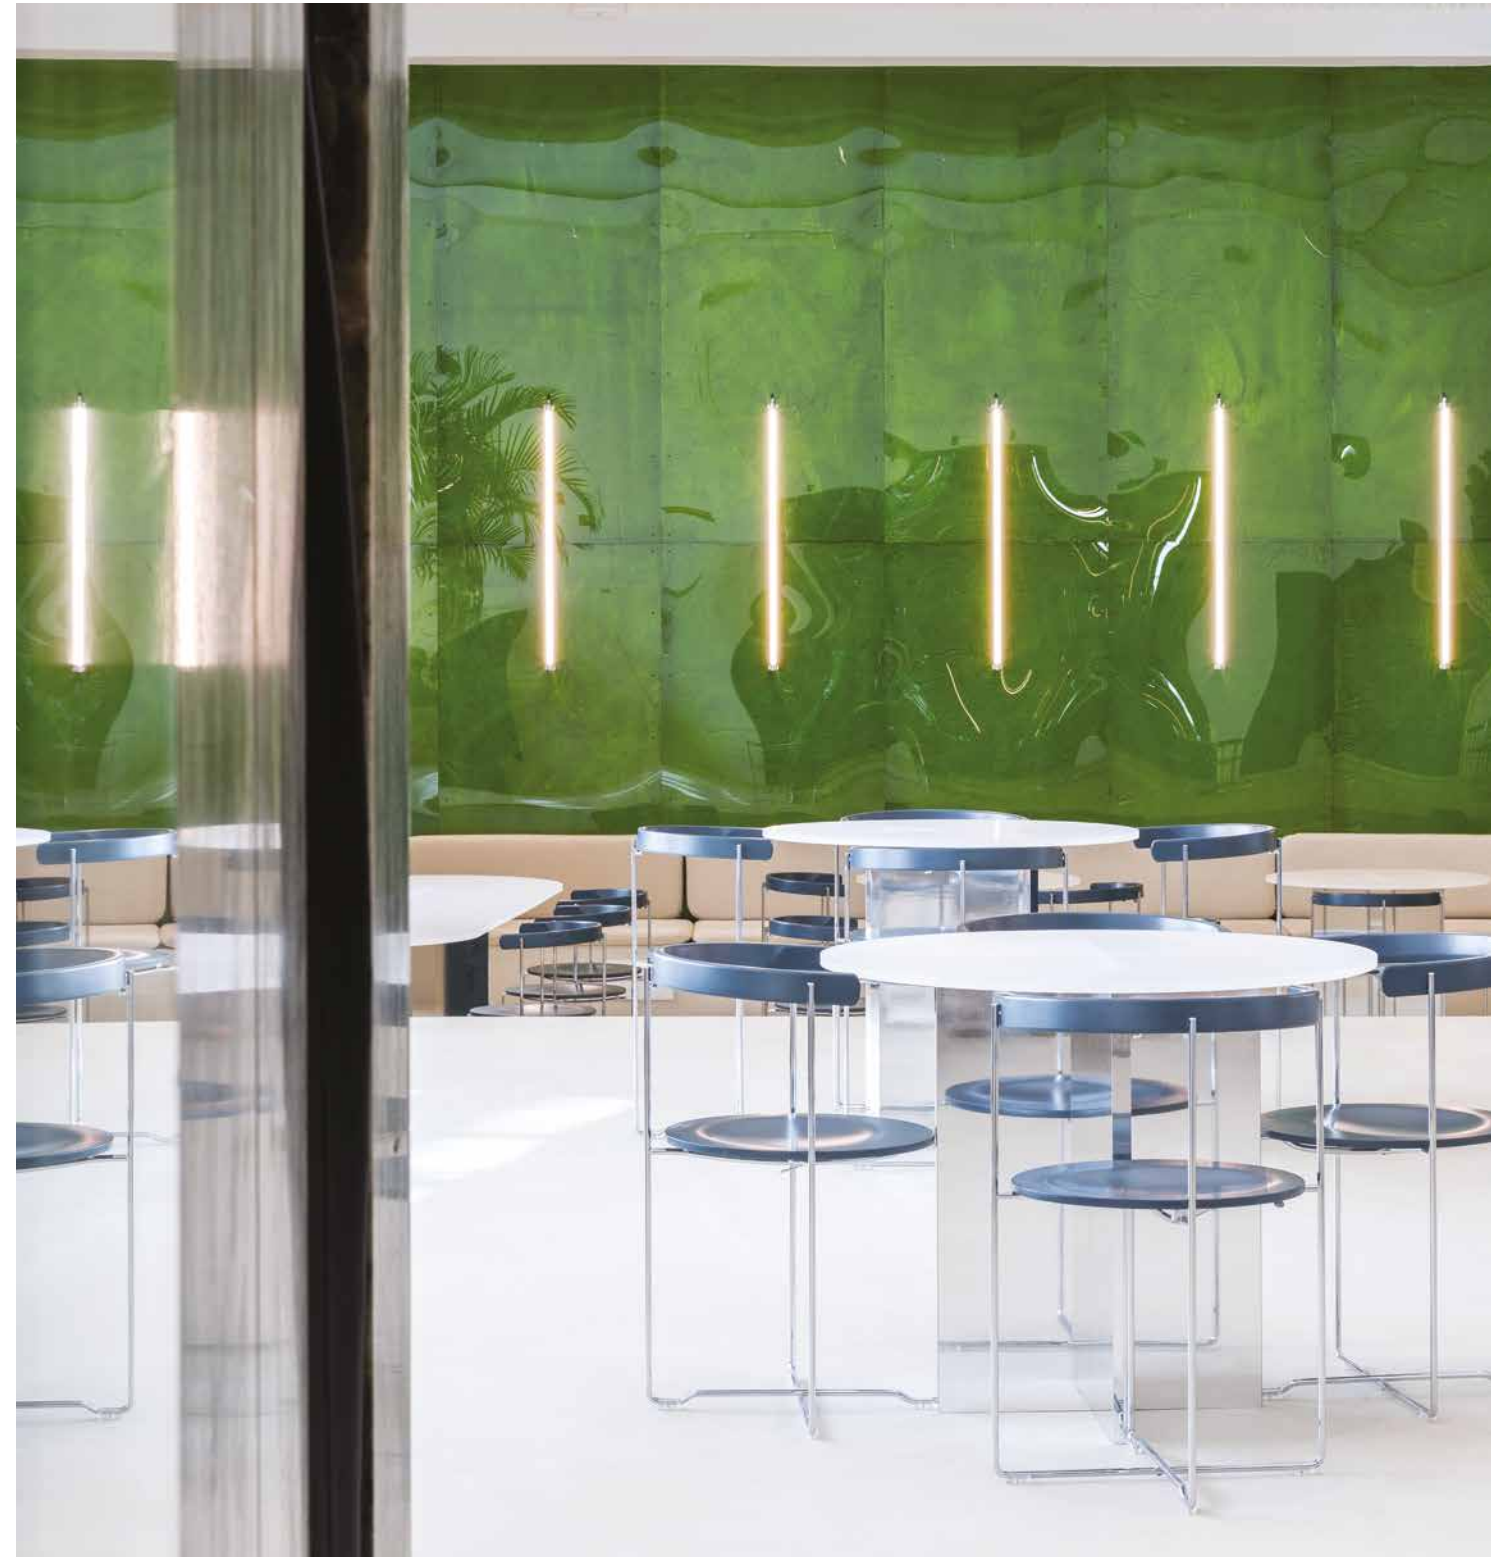



Cobra studios design - HUGUES DELAUNAY & KENNY DECOMMER

Wanda

Design U.T. EGOLUCE



Customized length p.203
Tamaños especiales p.203

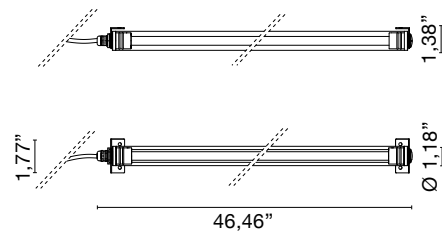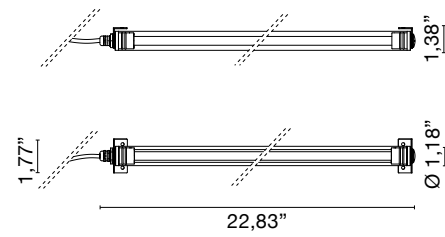

4536._._ / _._ 1.10 lb

.33 ■ Stainless steel AISI 316L - Acero cepillado

/W 4000K LED 7,5W CRI>90 24V 920lm

/WW 3000K LED 7,5W CRI>90 24V 825lm

/XW 2700K LED 7,5W CRI>90 24V 780lm



4537._._ / _._ 2.20 lb

.33 ■ Stainless steel AISI 316L - Acero cepillado

/W 4000K LED 16,5W CRI>90 24V 2024lm

/WW 3000K LED 16,5W CRI>90 24V 1815lm

/XW 2700K LED 16,5W CRI>90 24V 1716lm



DRIVERS CONDUCTORES

U0160/24

IN:120-277V OUT:24V-60W

U0161/24

IN:120-277V OUT:24V-100W

CUSTOM SIZE

Table of available lengths. Measures are referred to complete fixtures including closing heads.


Tabla de longitudes disponibles. Las medidas se refieren a la longitud total de las lámparas.

inches	watt	2700K (XW)	lm	3000K (WW)	lm	4000K (W)	lm
7.09"	1,5W	A4536.33/18/XW	156	A4536.33/18/WW	165	A4536.33/18/W	184
11.02"	3W	A4536.33/28/XW	312	A4536.33/28/WW	330	A4536.33/28/W	368
14.96"	4.5W	A4536.33/38/XW	468	A4536.33/38/WW	495	A4536.33/38/W	552
18.90"	6W	A4536.33/48/XW	624	A4536.33/48/WW	660	A4536.33/48/W	736
22.83"	7.5W	4536.33/XW ★	780	4536.33/WW ★	825	4536.33/W ★	920
26.77"	9W	A4536.33/68/XW	936	A4536.33/68/WW	990	A4536.33/68/W	1104
30.71"	10.5W	A4536.33/78/XW	1092	A4536.33/78/WW	1155	A4536.33/78/W	1288
34.65"	12W	A4536.33/88/XW	1248	A4536.33/88/WW	1320	A4536.33/88/W	1472
38.58"	13.5W	A4536.33/98/XW	1404	A4536.33/98/WW	1485	A4536.33/98/W	1656
42.52"	15W	A4536.33/108/XW	1560	A4536.33/108/WW	1650	A4536.33/108/W	1840
46.46"	16.5W	4537.33/XW ★	1716	4537.33/WW ★	1815	4537.33/W ★	2024
50.39"	18W	A4536.33/128/XW	1872	A4536.33/128/WW	1980	A4536.33/128/W	2208
54.33"	19.5W	A4536.33/138/XW	2028	A4536.33/138/WW	2145	A4536.33/138/W	2392
58.27"	21W	A4536.33/148/XW	2184	A4536.33/148/WW	2310	A4536.33/148/W	2576
62.20"	22.5W	A4536.33/158/XW	2340	A4536.33/158/WW	2475	A4536.33/158/W	2760
66.14"	24W	A4536.33/168/XW	2496	A4536.33/168/WW	2640	A4536.33/168/W	2944
70.08"	25.5W	A4536.33/178/XW	2652	A4536.33/178/WW	2805	A4536.33/178/W	3128
74.02"	27W	A4536.33/188/XW	2808	A4536.33/188/WW	2970	A4536.33/188/W	3312
77.95"	28.5W	A4536.33/198/XW	2964	A4536.33/198/WW	3135	A4536.33/198/W	3496
81.89"	30W	A4536.33/208/XW	3120	A4536.33/208/WW	3300	A4536.33/208/W	3680
85.83"	31.5W	A4536.33/218/XW	3276	A4536.33/218/WW	3465	A4536.33/218/W	3864
89.76"	33W	A4536.33/228/XW	3432	A4536.33/228/WW	3630	A4536.33/228/W	4048
93.70"	34.5W	A4536.33/238/XW	3588	A4536.33/238/WW	3795	A4536.33/238/W	4232
97.64"	36W	A4536.33/248/XW	3744	A4536.33/248/WW	3960	A4536.33/248/W	4416
101.57"	37.5W	A4536.33/258/XW	3900	A4536.33/258/WW	4125	A4536.33/258/W	4600



★ Artículo standard a catalogo - Standard catalogue item

Wanda

Design U.T. EGOLUCE




Cobra studios design - HUGUES DELAUNAY & KENNY DECOMMER

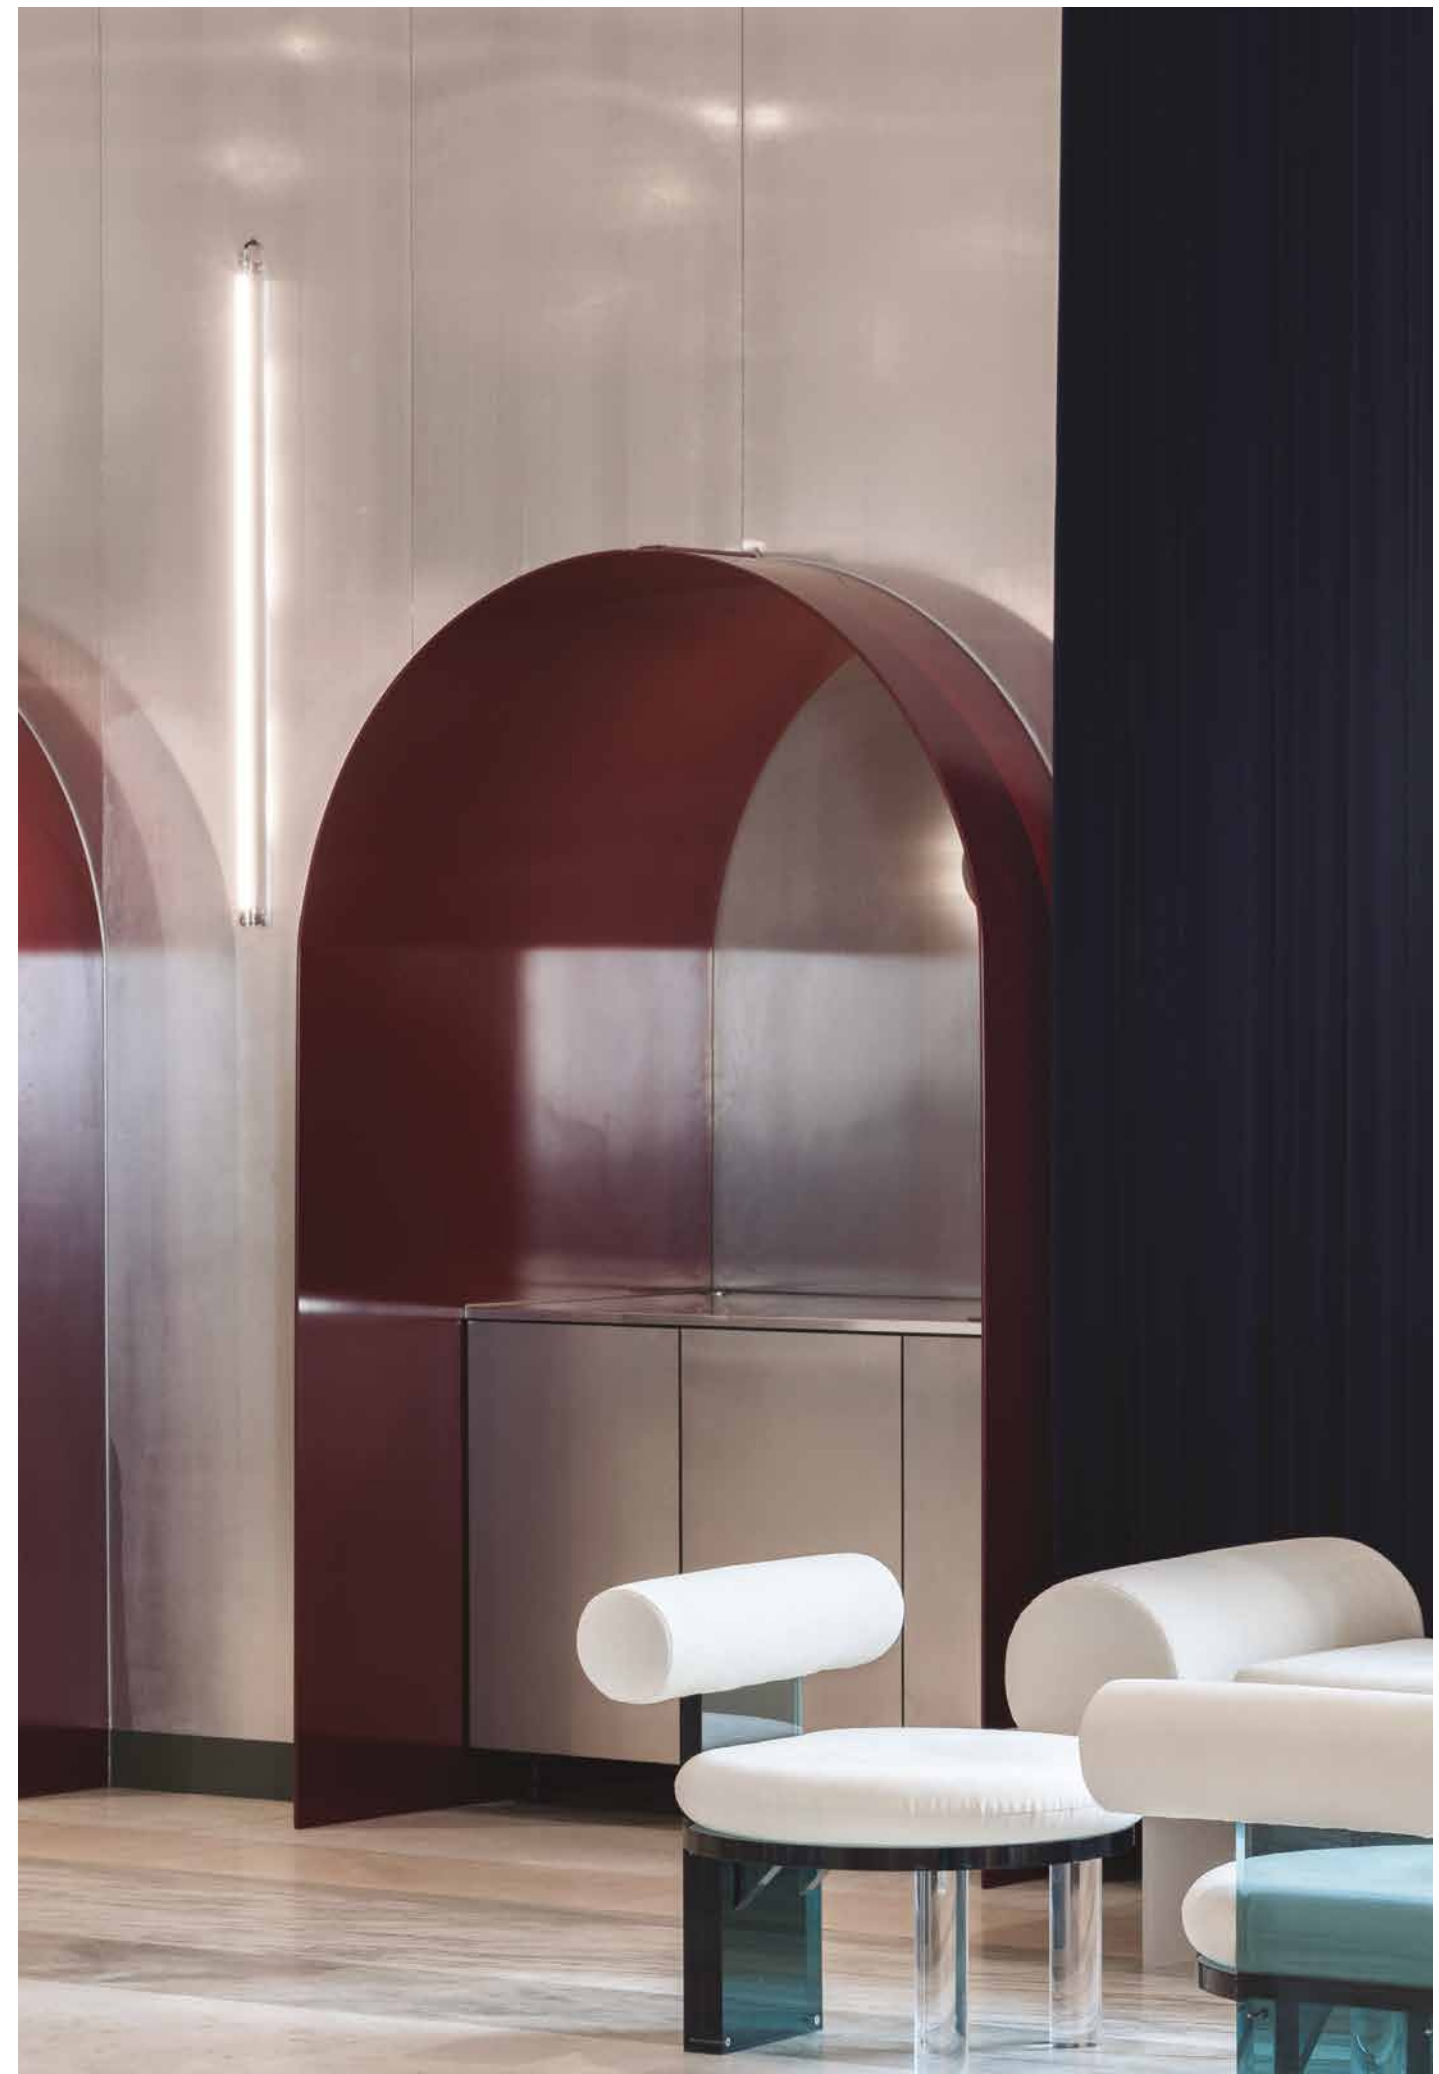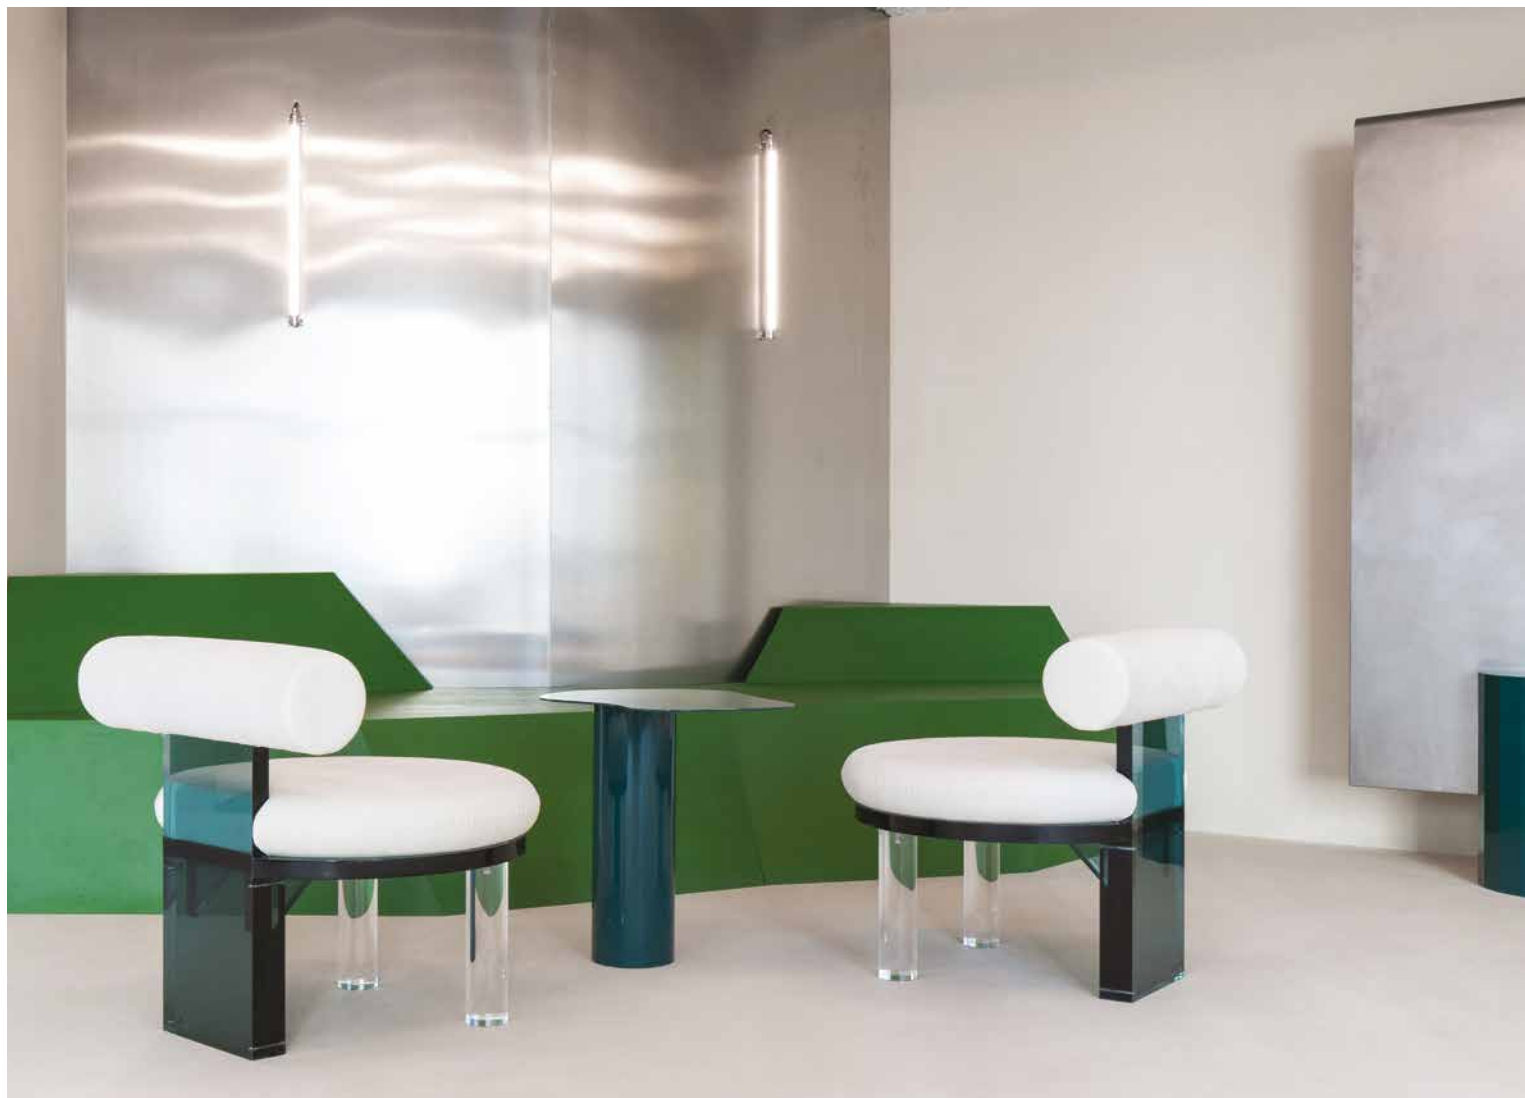

Cobra studios design - HUGUES DELAUNAY & KENNY DECOMMER



Wanda


Design U.T. EGOLUCE



Wanda

Design U.T. EGOLUCE

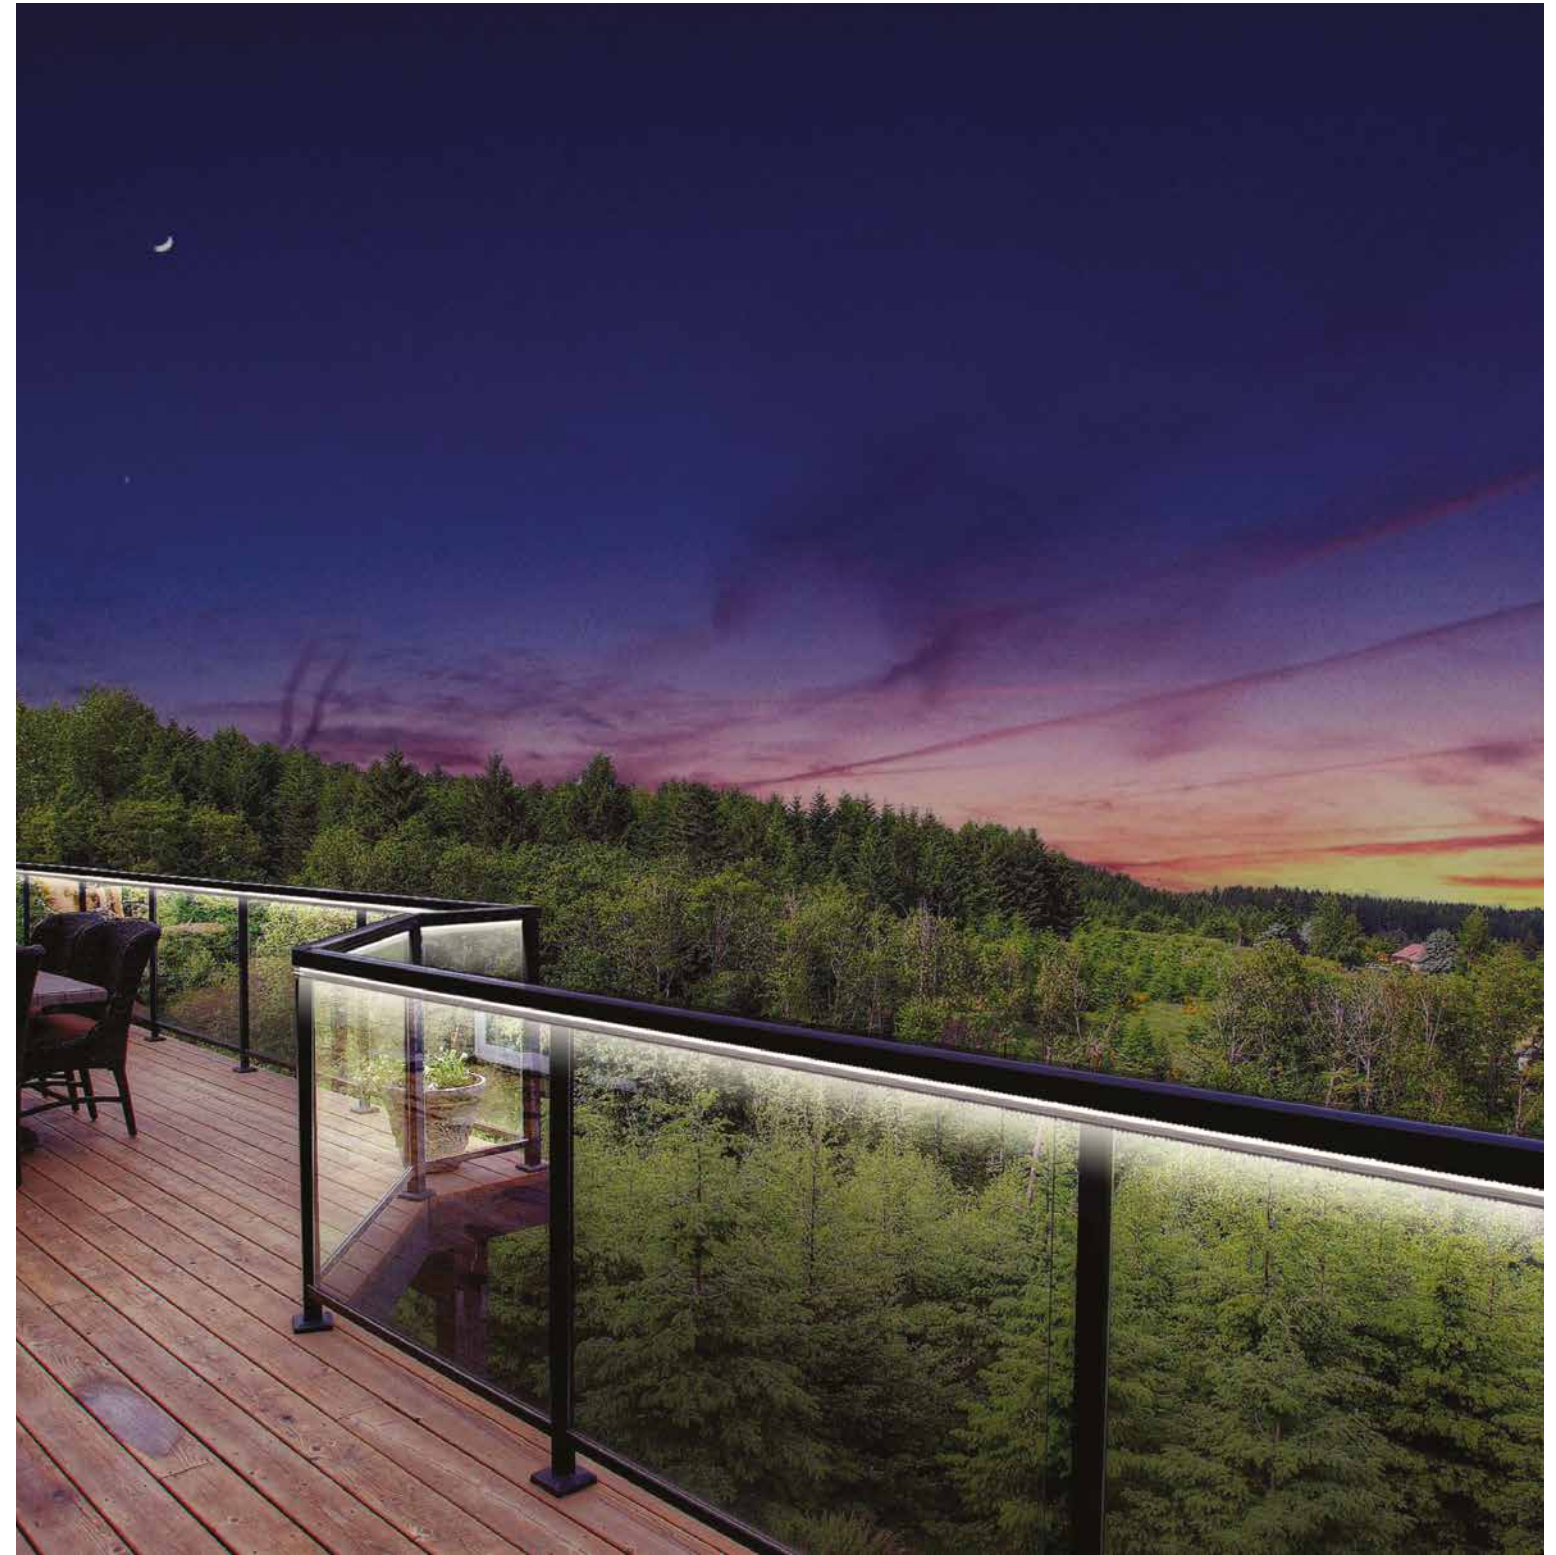

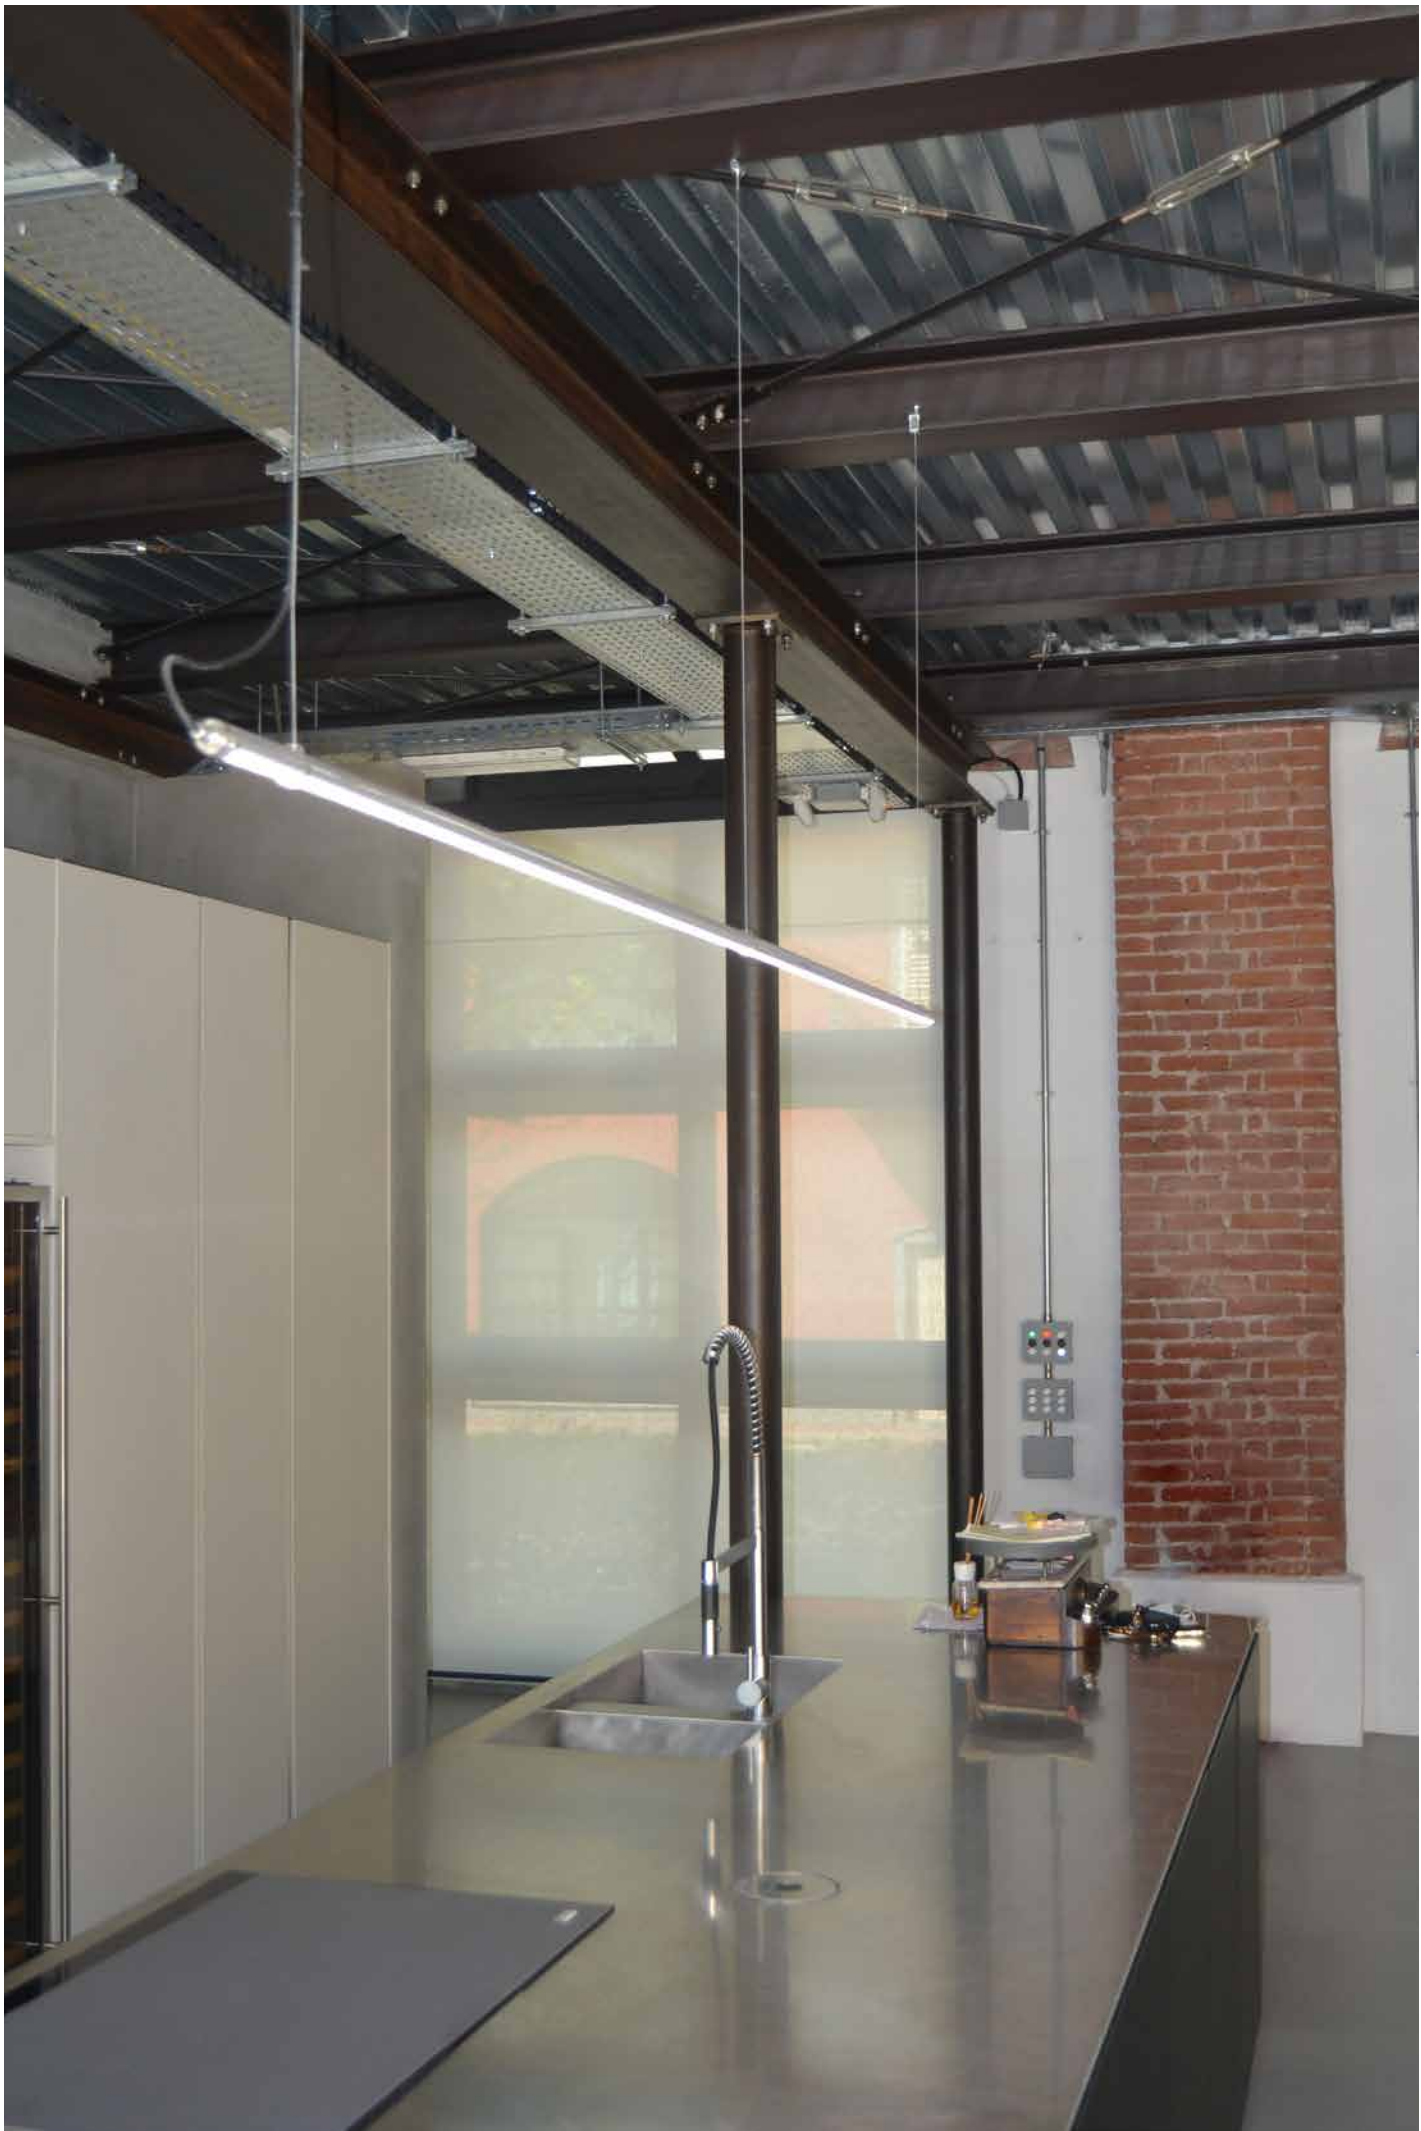

Wanda System

Design U.T. EGOLUCE




Wanda System

Design U.T. EGOLUCE



Accessories and rosettes for suspension systems p.215
 Accesorios y rosetas para sistemas de suspensión p.215

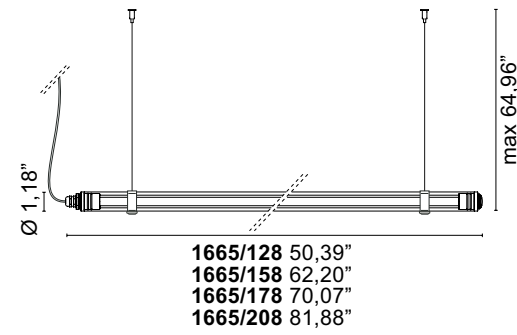

1665._ / 128 / _ _ 2.43 lb

.33 ■ Stainless steel AISI 316L - Acero cepillado

/W	4000K	LED 18W CRI>90	24V	2208lm
/WW	3000K	LED 18W CRI>90	24V	1980lm
/XW	2700K	LED 18W CRI>90	24V	1872lm



1665._ / 158 / _ _ 3.00 lb

.33 ■ Stainless steel AISI 316L - Acero cepillado

/W	4000K	LED 22,5W CRI>90	24V	2760lm
/WW	3000K	LED 22,5W CRI>90	24V	2475lm
/XW	2700K	LED 22,5W CRI>90	24V	2340lm



1665._ / 178 / _ _ 3.37 lb

.33 ■ Stainless steel AISI 316L - Acero cepillado

/W	4000K	LED 25,5W CRI>90	24V	3128lm
/WW	3000K	LED 25,5W CRI>90	24V	2805lm
/XW	2700K	LED 25,5W CRI>90	24V	2652lm



1665._ / 208 / _ _ 3.95 lb




.33 ■ Stainless steel AISI 316L - Acero cepillado

/W	4000K	LED 30W CRI>90	24V	3680lm
/WW	3000K	LED 30W CRI>90	24V	3300lm
/XW	2700K	LED 30W CRI>90	24V	3120lm




Suspension fixing kit and ceiling canopies, power supplies separately ordered

El kit de montaje en suspensión y las rosetas con fuentes de alimentación deben pedirse por separado

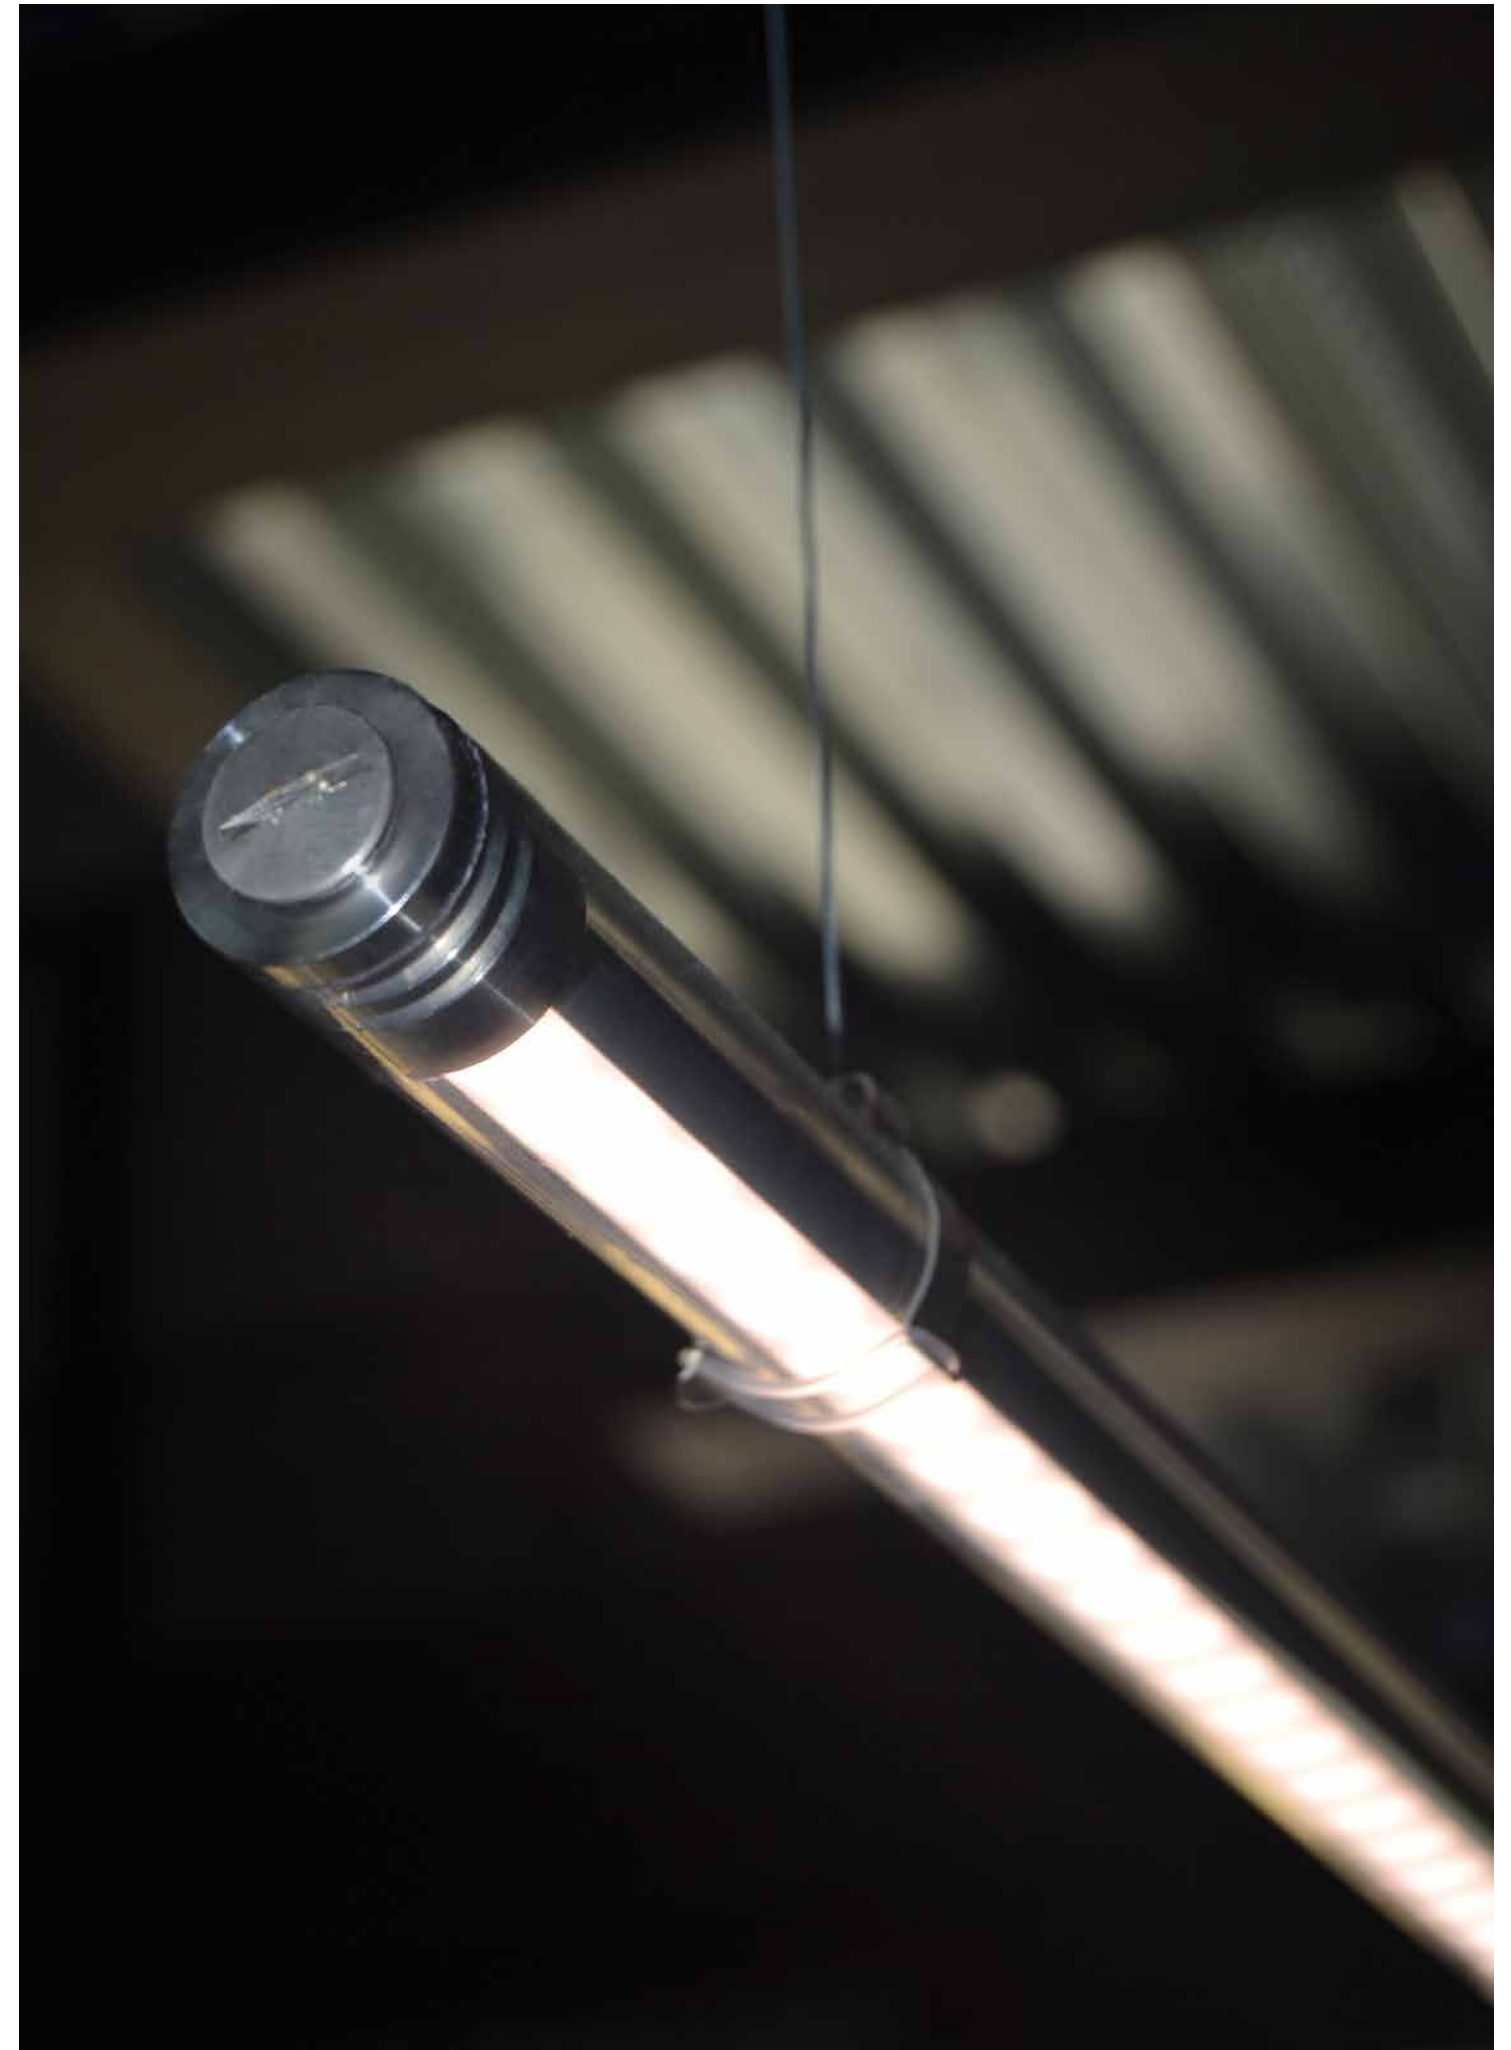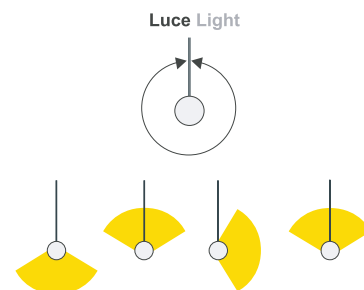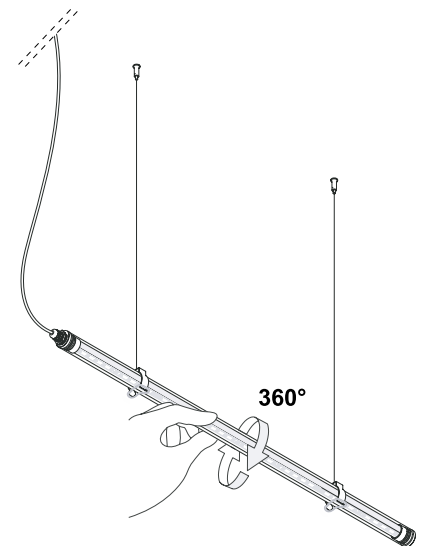


Wanda System

Design U.T. EGOLUCE

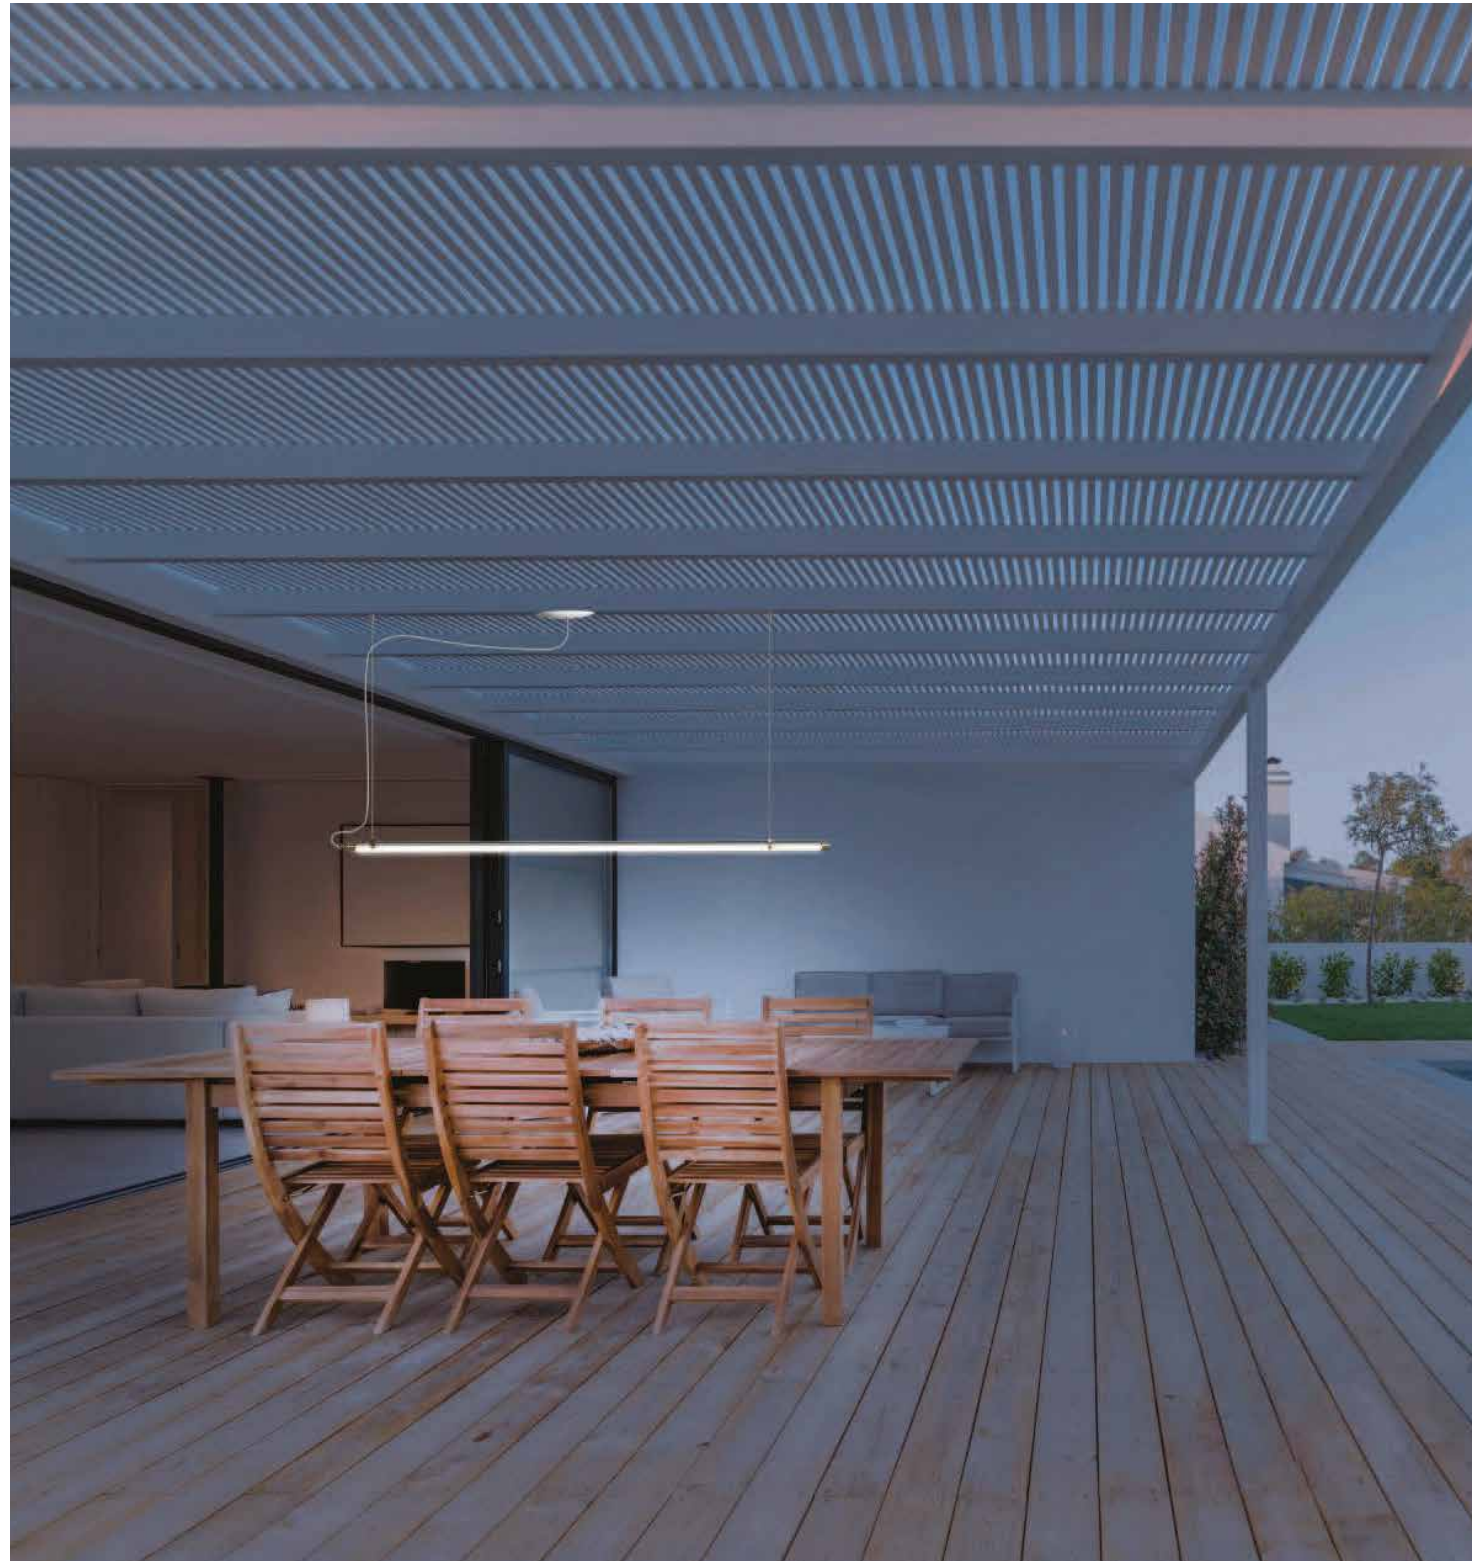


CEILING ROSES FOR SUSPENSION SYSTEMS 24V / ROSETAS PARA SISTEMAS DE SUSPENSIÓN DE 24V



Canopy complete with 60W driver
Rosetón completa con controlador de 60W


U0990/60 . _ _		1.32 lb
.01	White - Blanco	60 W
.02	Black - Negro	60 W
.85	Painted silver finishing - Plata pintada	60 W
.86	Painted gold finishing - Oro pintado	60 W
.87	Painted copper finishing - Cobre pintado	60 W
.88	Painted bronze finishing - Bronce pintado	60 W



Canopy complete with 99W driver
Rosetón completa con controlador de 99W

U0990/100 . _ _ / _ _		2.87 lb
.01	White - Blanco	99 W
.02	Black - Negro	99 W
.85	Painted silver finishing - Plata pintada	99 W
.86	Painted gold finishing - Oro pintado	99 W
.87	Painted copper finishing - Cobre pintado	99 W
.88	Painted bronze finishing - Bronce pintado	99 W

/P	DIMMER		MAX 75W
/V	DIMMER		MAX 75W
/D	DIMMER		MAX 75W



Canopy complete with driver 198W
Roseta completa con driver de 198W

U0990/200 . _ _ / _ _		4.41 lb
.01	White - Blanco	198 W
.02	Black - Negro	198 W
.85	Painted silver finishing - Plata pintada	198 W
.86	Painted gold finishing - Oro pintado	198 W
.87	Painted copper finishing - Cobre pintado	198 W
.88	Painted bronze finishing - Bronce pintado	198 W

/P	DIMMER		MAX 2x75W
/V	DIMMER		MAX 2x75W
/D	DIMMER		MAX 2x75W




Wanda System

Design U.T. EGOLUCE



Wanda System

Design U.T. EGOLUCE

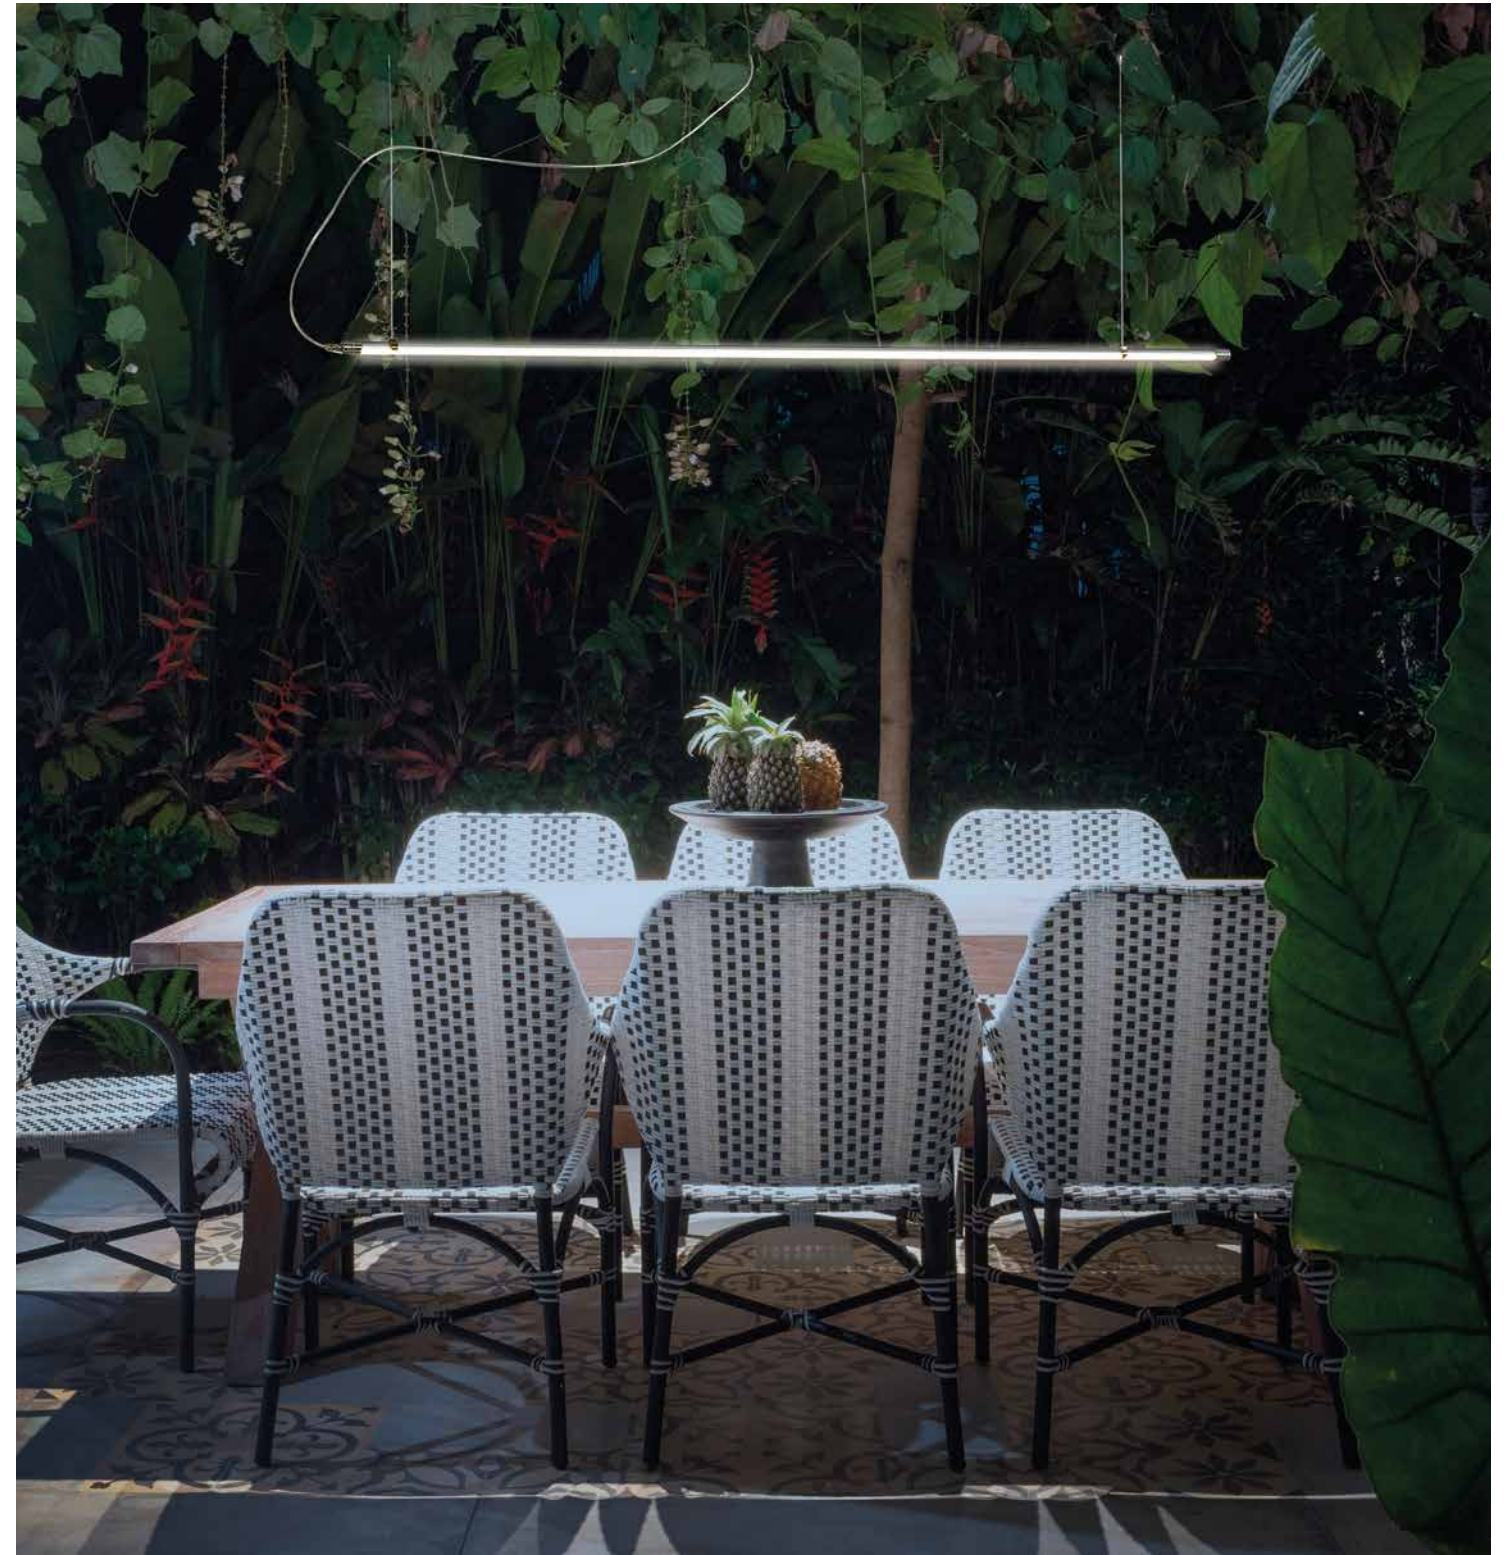

INDOOR / OUTDOOR

Spooky

Design U.T. Egoluce



LED linear walk-over IP67 in coextruded transparent and opal methacrylate. Modular anodized aluminium blind boxes (reinforced anodizing for outdoor). To be installed into floor or wall and possibility to compose endless light lines.

Linea luminosa LED pisable IP67 en metacrilato coextruso transparente y opal. Cajetin modular en aluminio anodizado (anodización reforzada para exterior). Instalacion a suelo o pared y posibilidad de realizar lineas luminosas continuas.

Spooky

Design U.T. EGOLUCE



Spooky

Design U.T. EGOLUCE



Spooky



Design U.T. EGOLUCE





Spooky

Design U.T. EGOLUCE

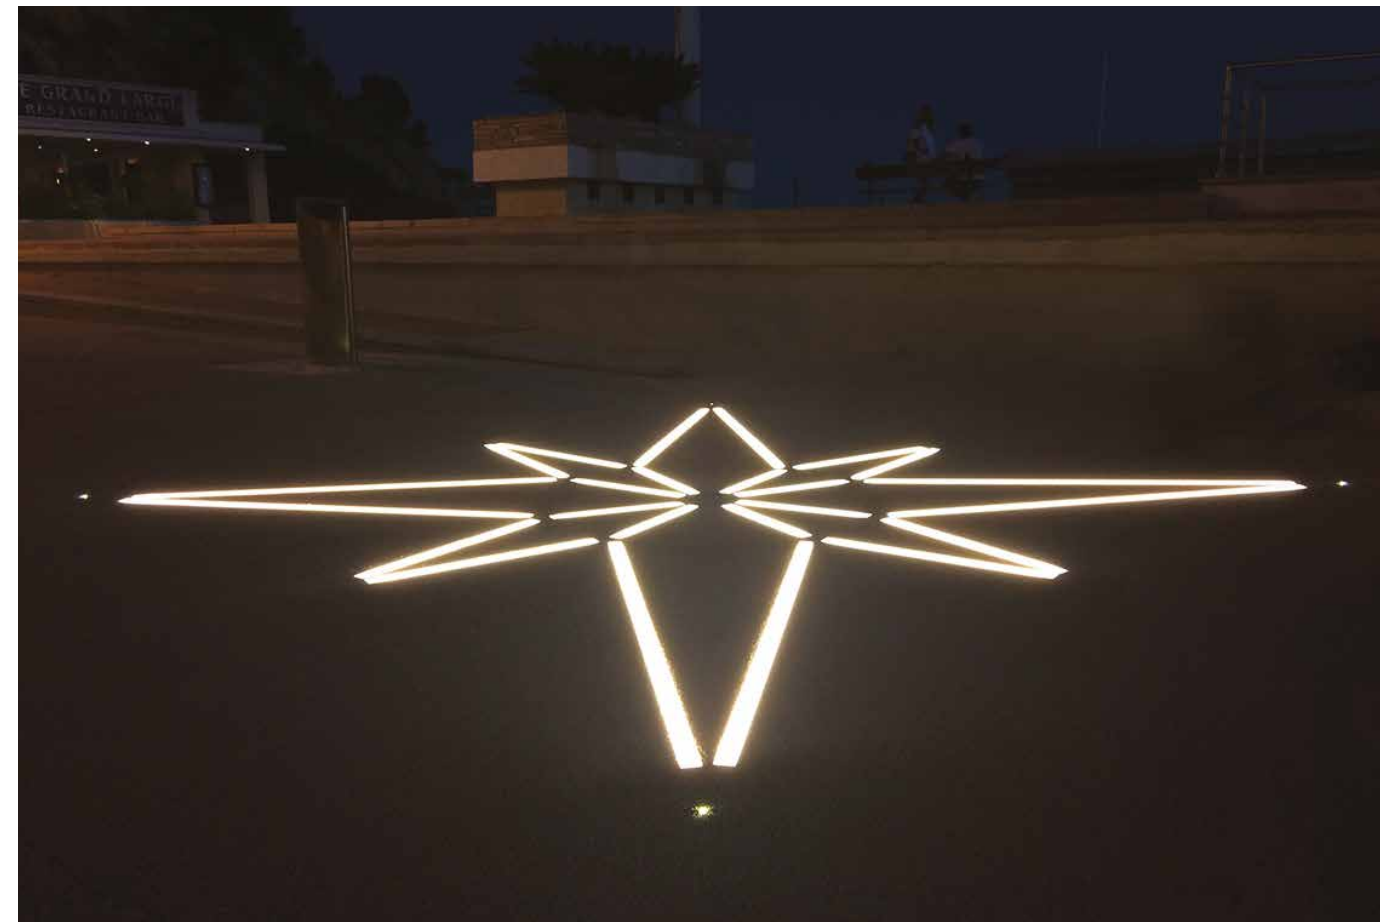


Spooky

Design U.T. EGOLUCE



Spooky


Design U.T. EGOLUCE



IP67 connector included
Conector IP67 incluido

Spooky system codes. Códigos de sistema espeluznantes

6417.01 21,25"
6418.01 40,94"
6419.01 60,62"
A6417.01 5,51"... 56,69"

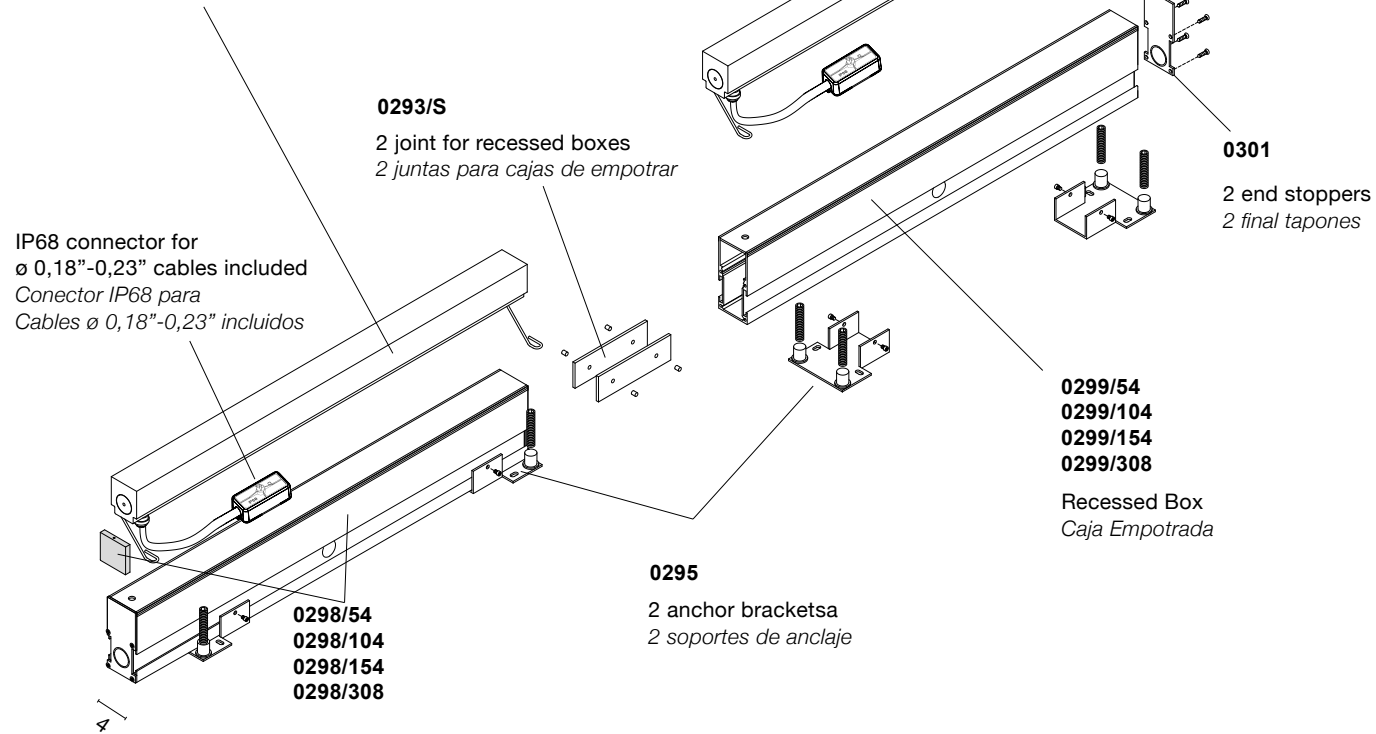

Starting recessed box with element for lamp maintenance.
Caja de empotrar de arranque con elemento para el mantenimiento de la lámpara.

* The end stopper is included in the starting box. El tope final está incluido en la caja de inicio.

SYSTEM ELEMENTS ELEMENTOS DEL SISTEMA

Length (inches)	Weight (lb)	Power (W)	Light Output (lm)	Color Temperature (K)	Beam Spread	Notes
21,26"	1.76 lb	4,8W	540lm	4000K	24V	Code: 6417.01
40,94"	3.53 lb	9,6W	1080lm	4000K	24V	Code: 6418.01
60,63"	5.07 lb	14,4W	1620lm	4000K	24V	Code: 6419.01

Code	Power (W)	Light Output (lm)	Color Temperature (K)	Beam Spread
/W	4,8W	540lm	4000K	24V
/WW	3000K	LED 4,8W CRI>90	24V	510lm
/W	9,6W	1080lm	4000K	24V
/WW	3000K	LED 9,6W CRI>90	24V	1020lm
/W	14,4W	1620lm	4000K	24V
/WW	3000K	LED 14,4W CRI>90	24V	1530lm

SYSTEM ELEMENTS ELEMENTOS DEL SISTEMA



Starting recessed box with caps and element for lamp maintenance
Encofrado de arranque con tacos y elemento para mantenimiento de lámparas

0298 / _ _
/54 21,69" x 1,57" x 3,54"
/104 41,37" x 1,57" x 3,54"
/154 61,06" x 1,57" x 3,54"



Recessed box
Encofrado

0299 / _ _
/54 21,69" x 1,57" x 3,54"
/104 41,37" x 1,57" x 3,54"
/154 61,06" x 1,57" x 3,54"
/308 121,29" x 1,57" x 3,54"



2 anchor brackets for recessed box
2 escuadras de anclaje para encofrado

0295



2 joints for recessed boxes
2 juntas de encofrado

0293/S



2 end stoppers for recessed box
2 tapas de encofrado

0301

CUSTOM SIZE

Table of available lengths on request. Measures are referred to complete fixtures including closing heads.
Tabla de longitudes disponible previa solicitud. Las medidas se refieren a la longitud total de las lámparas.

inches	watt	3000K (WW)	lm	4000K (W)	lm
5.51"	1W	A6417.01/14/WW	102	A6417.01/14/W	108
9.45"	1,9W	A6417.01/24/WW	204	A6417.01/24/W	216
13.39"	2,9W	A6417.01/34/WW	306	A6417.01/34/W	324
17.32"	3,8W	A6417.01/44/WW	408	A6417.01/44/W	432
21.26"	4,8W	6417.01/WW *	510	6417.01/W *	540
25.20"	5,8W	A6417.01/64/WW	612	A6417.01/64/W	648
29.13"	6,7W	A6417.01/74/WW	714	A6417.01/74/W	756
33.07"	7,7W	A6417.01/84/WW	816	A6417.01/84/W	864
37.01"	8,8W	A6417.01/94/WW	918	A6417.01/94/W	972
40.94"	9,6W	6418.01/WW *	1020	6418.01/W *	1080
44.88"	10,6W	A6417.01/114/WW	1122	A6417.01/114/W	1188
48.82"	11,5W	A6417.01/124/WW	1224	A6417.01/124/W	1296
52.76"	12,5W	A6417.01/134/WW	1326	A6417.01/134/W	1404
56.69"	13,4W	A6417.01/144/WW	1428	A6417.01/144/W	1512
60.63"	14,4W	6419.01/WW *	1530	6419.01/W *	1620

DRIVERS CONDUCTORES

U0160/24

IN:120-277V OUT:24V-60W

U0161/24

IN:120-277V OUT:24V-100W

Spooky

Design U.T. EGOLUCE



INDOOR / OUTDOOR

Zeppelin

Design U.T. Egołuce





Series of walkable downlights (IP 67) with AISI 316L stainless steel flange, aluminum heat sink and 11,81" neoprene cable. Available in round and square versions. Formwork or plasterboard mounting with special accessory.

Serie de proyectores orientables (IP 67) con brida de acero inoxidable AISI 316L, disipador de calor de aluminio y cable de neopreno de 11,81". Disponible en versiones redonda y cuadrada. Montaje en encofrado o pladur con accesorio especial.



Zeppelin


Design U.T. EGOLUCE

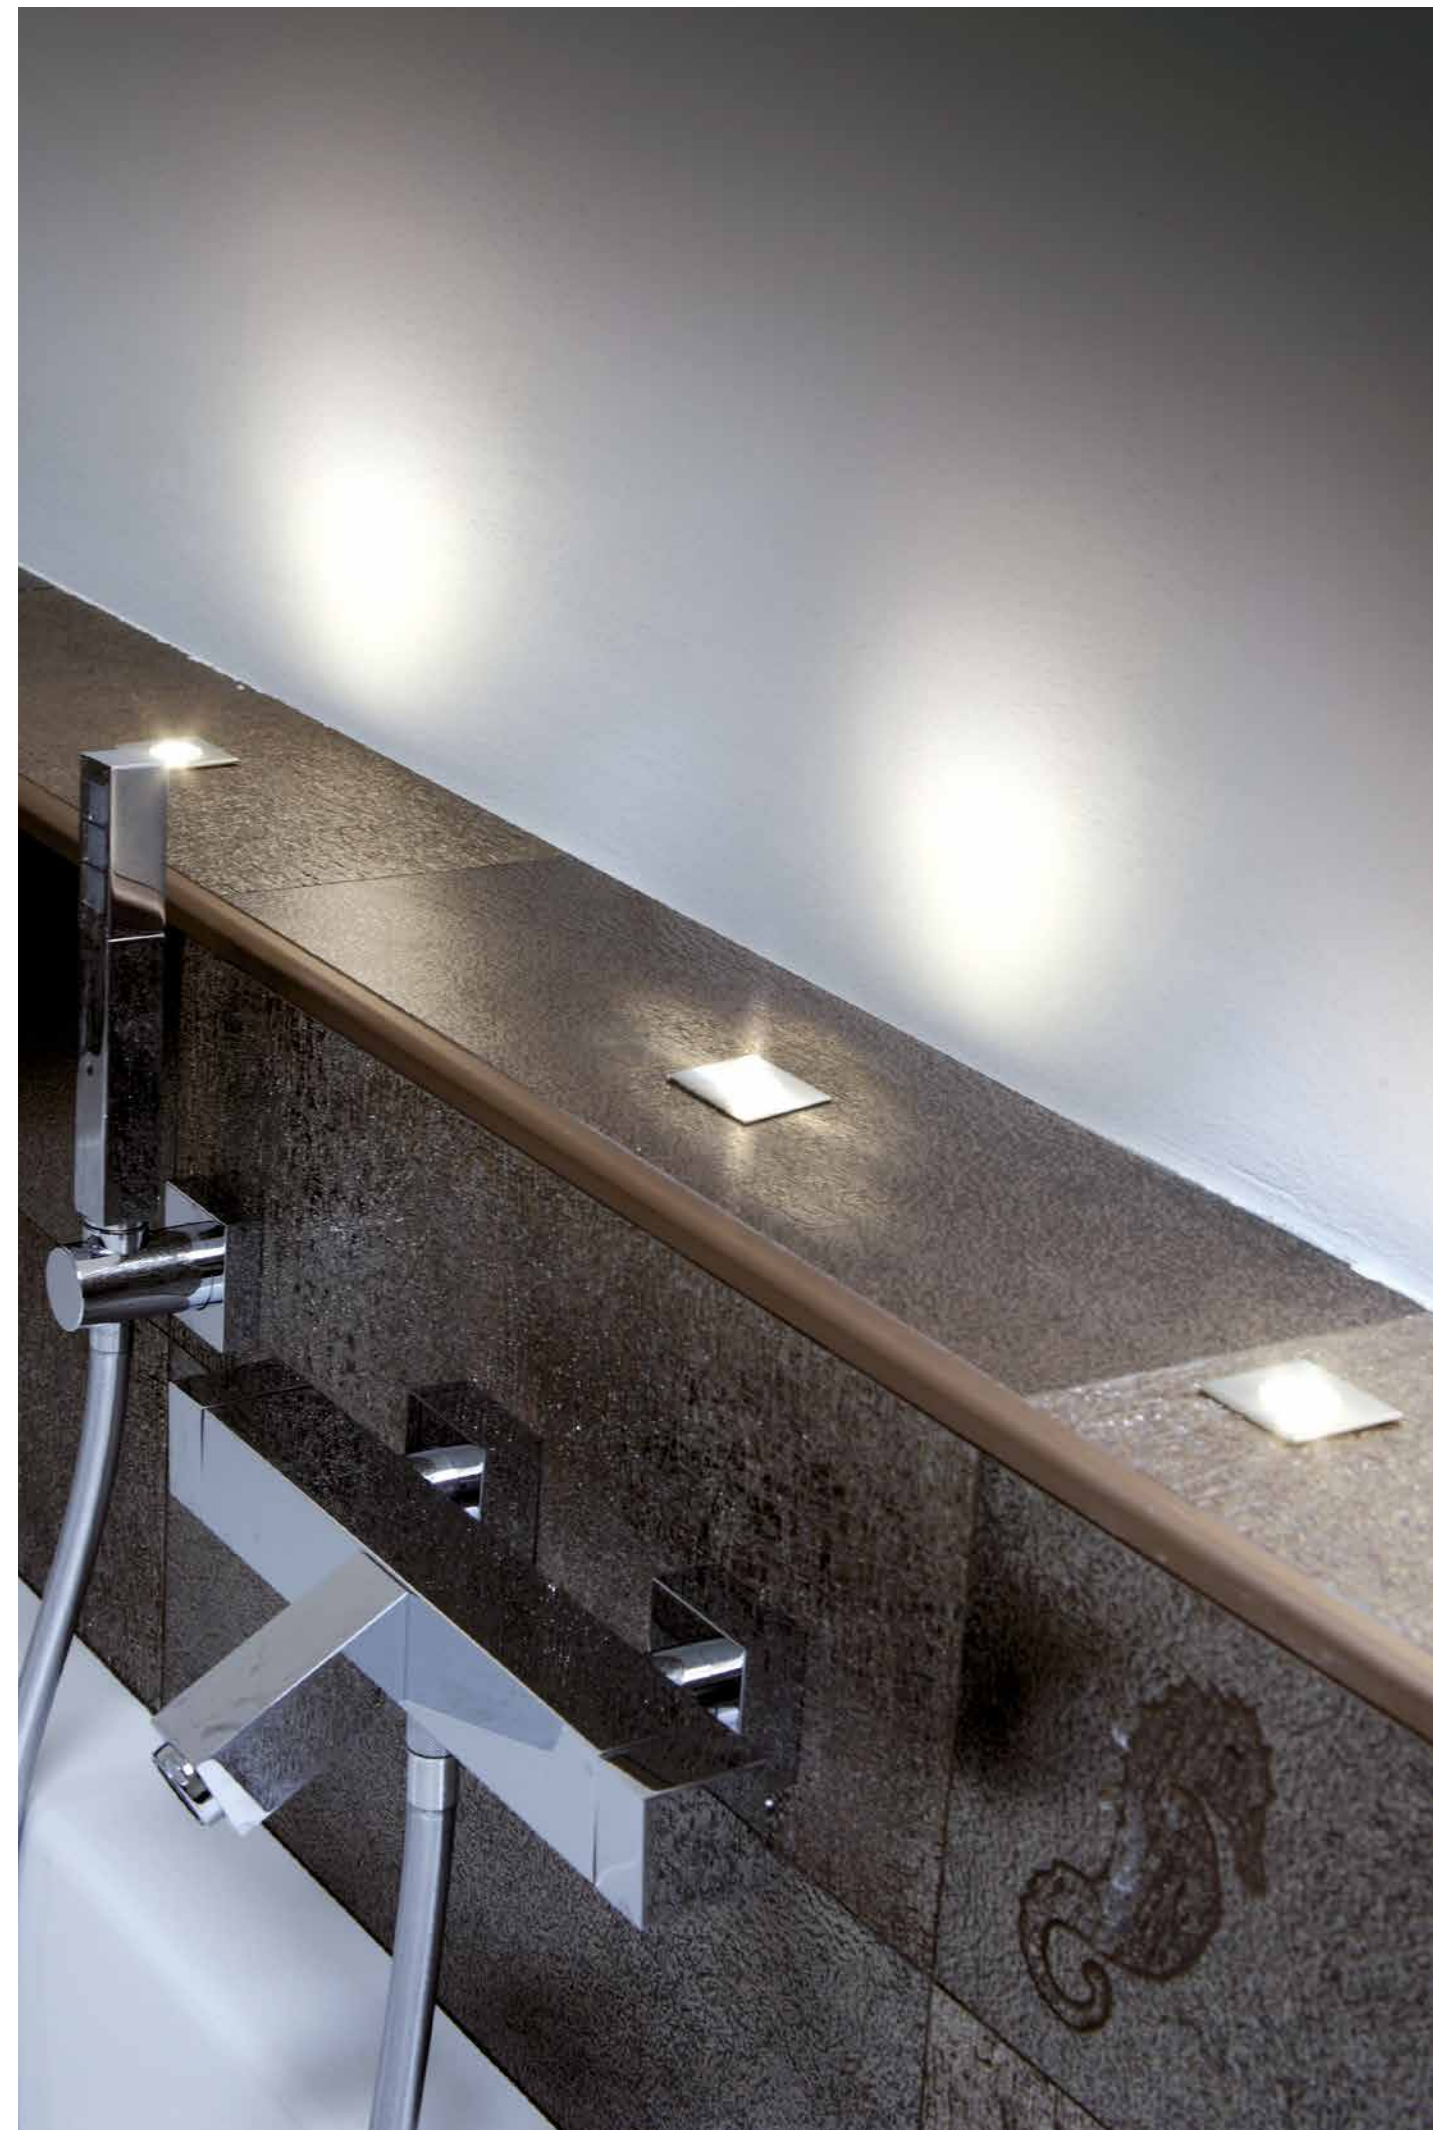

Zeppelin

Design U.T. EGOLUCE

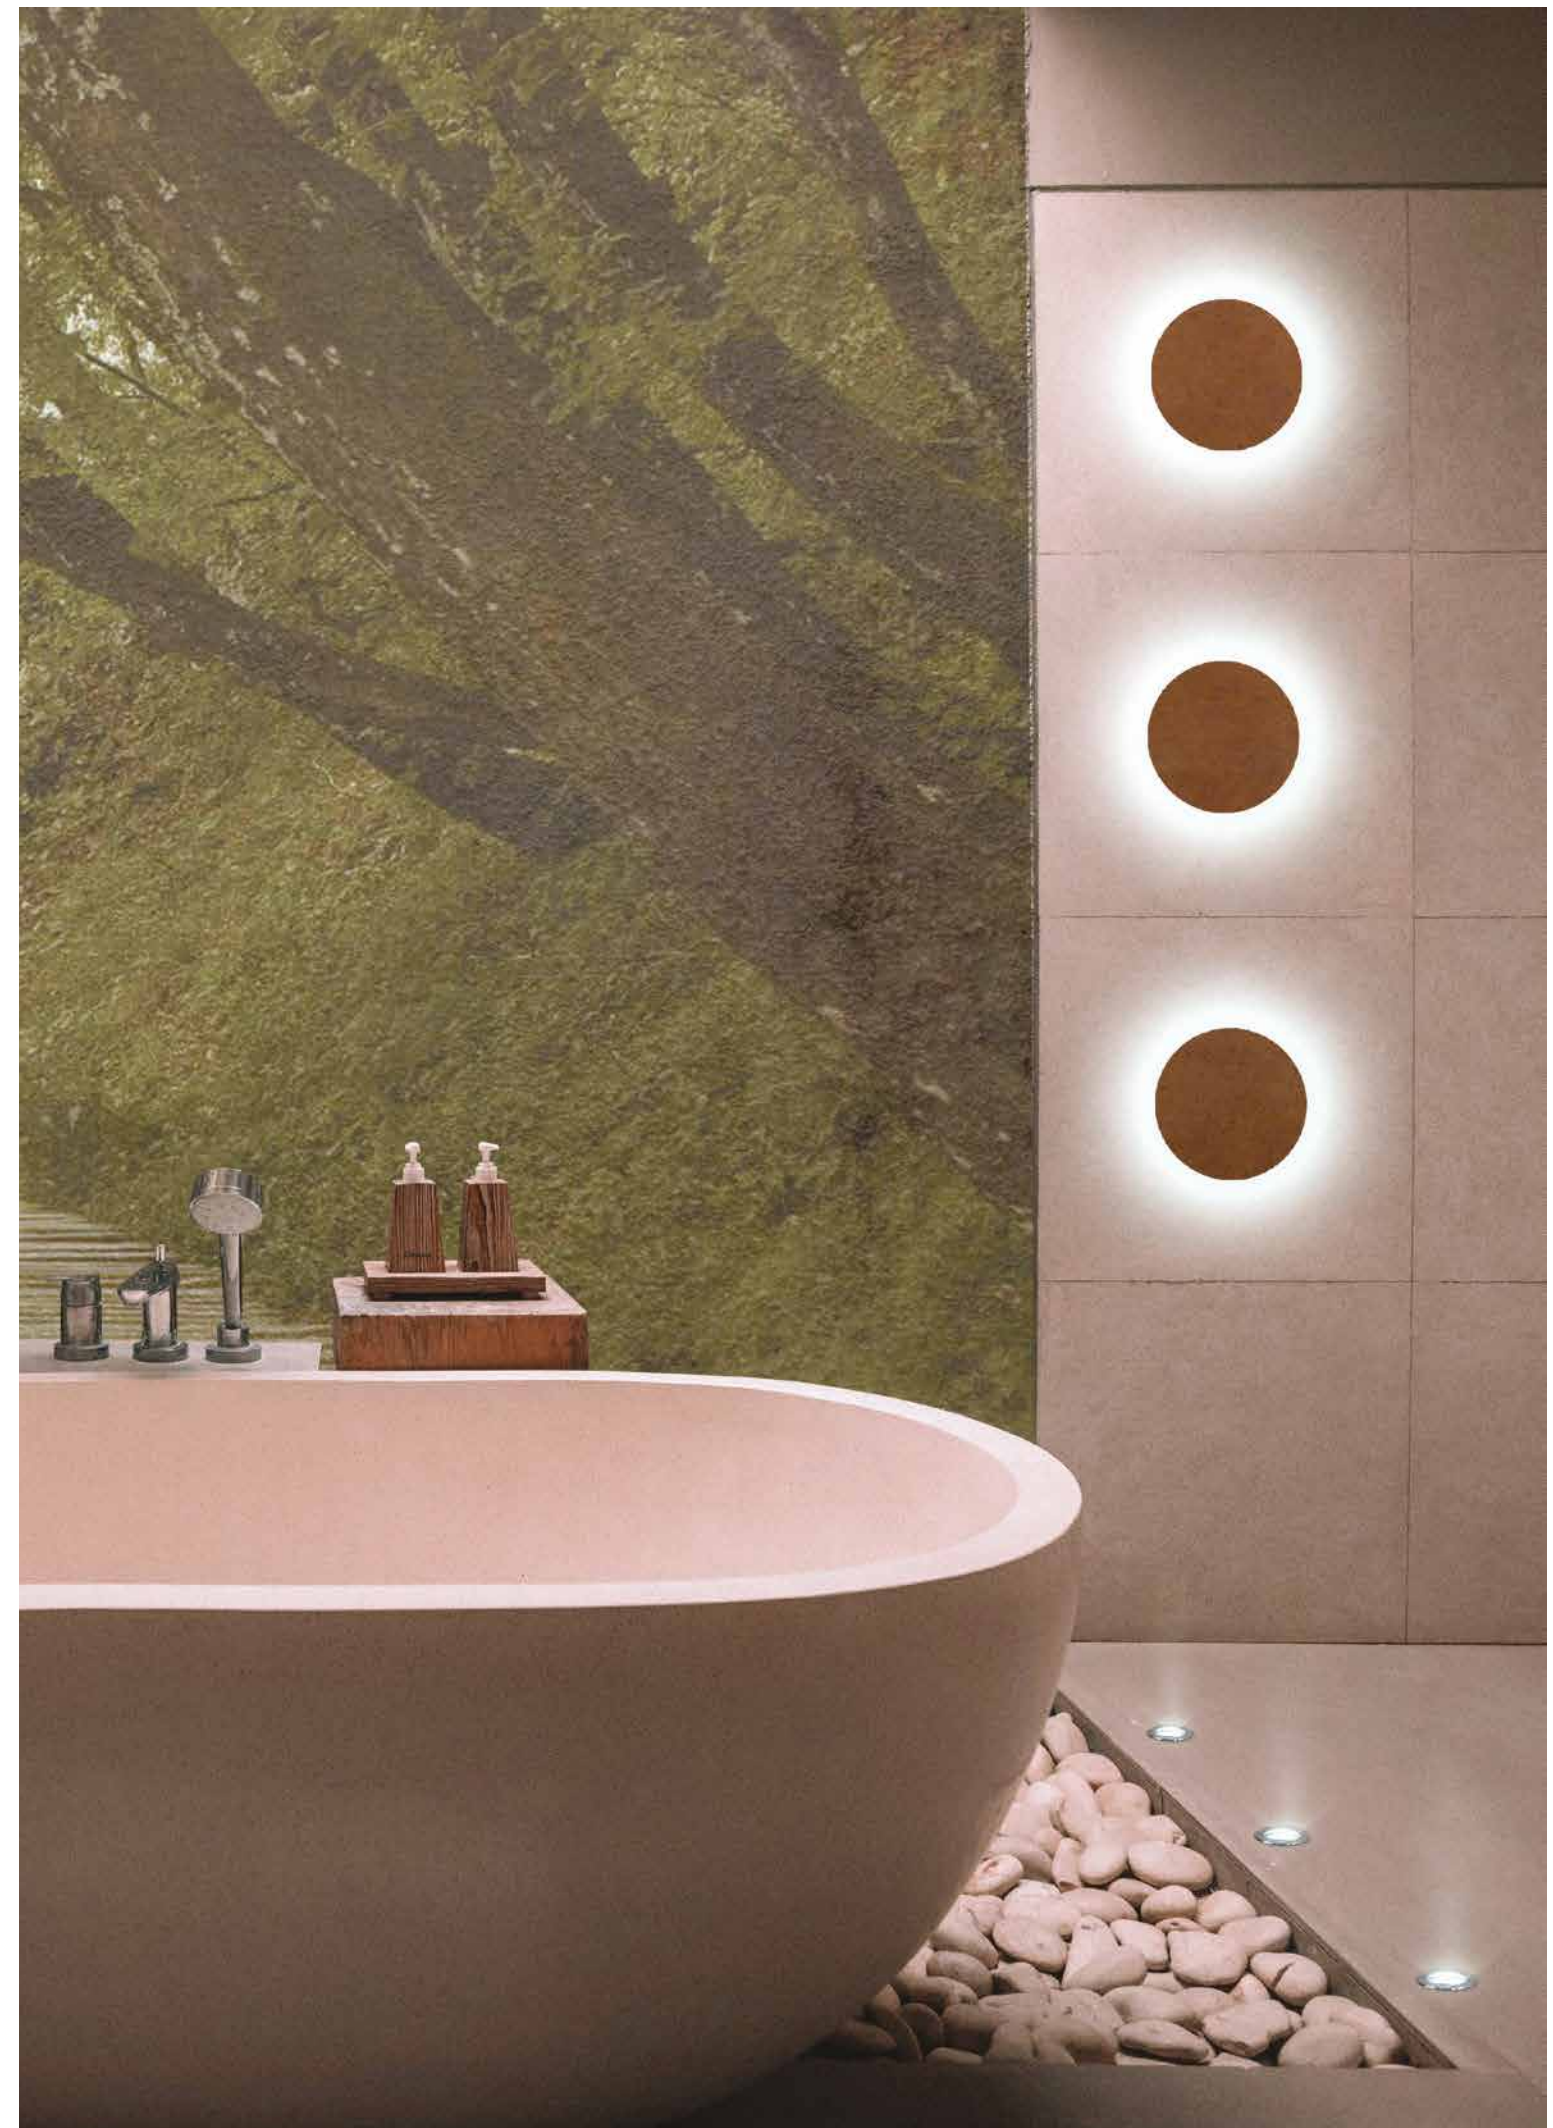

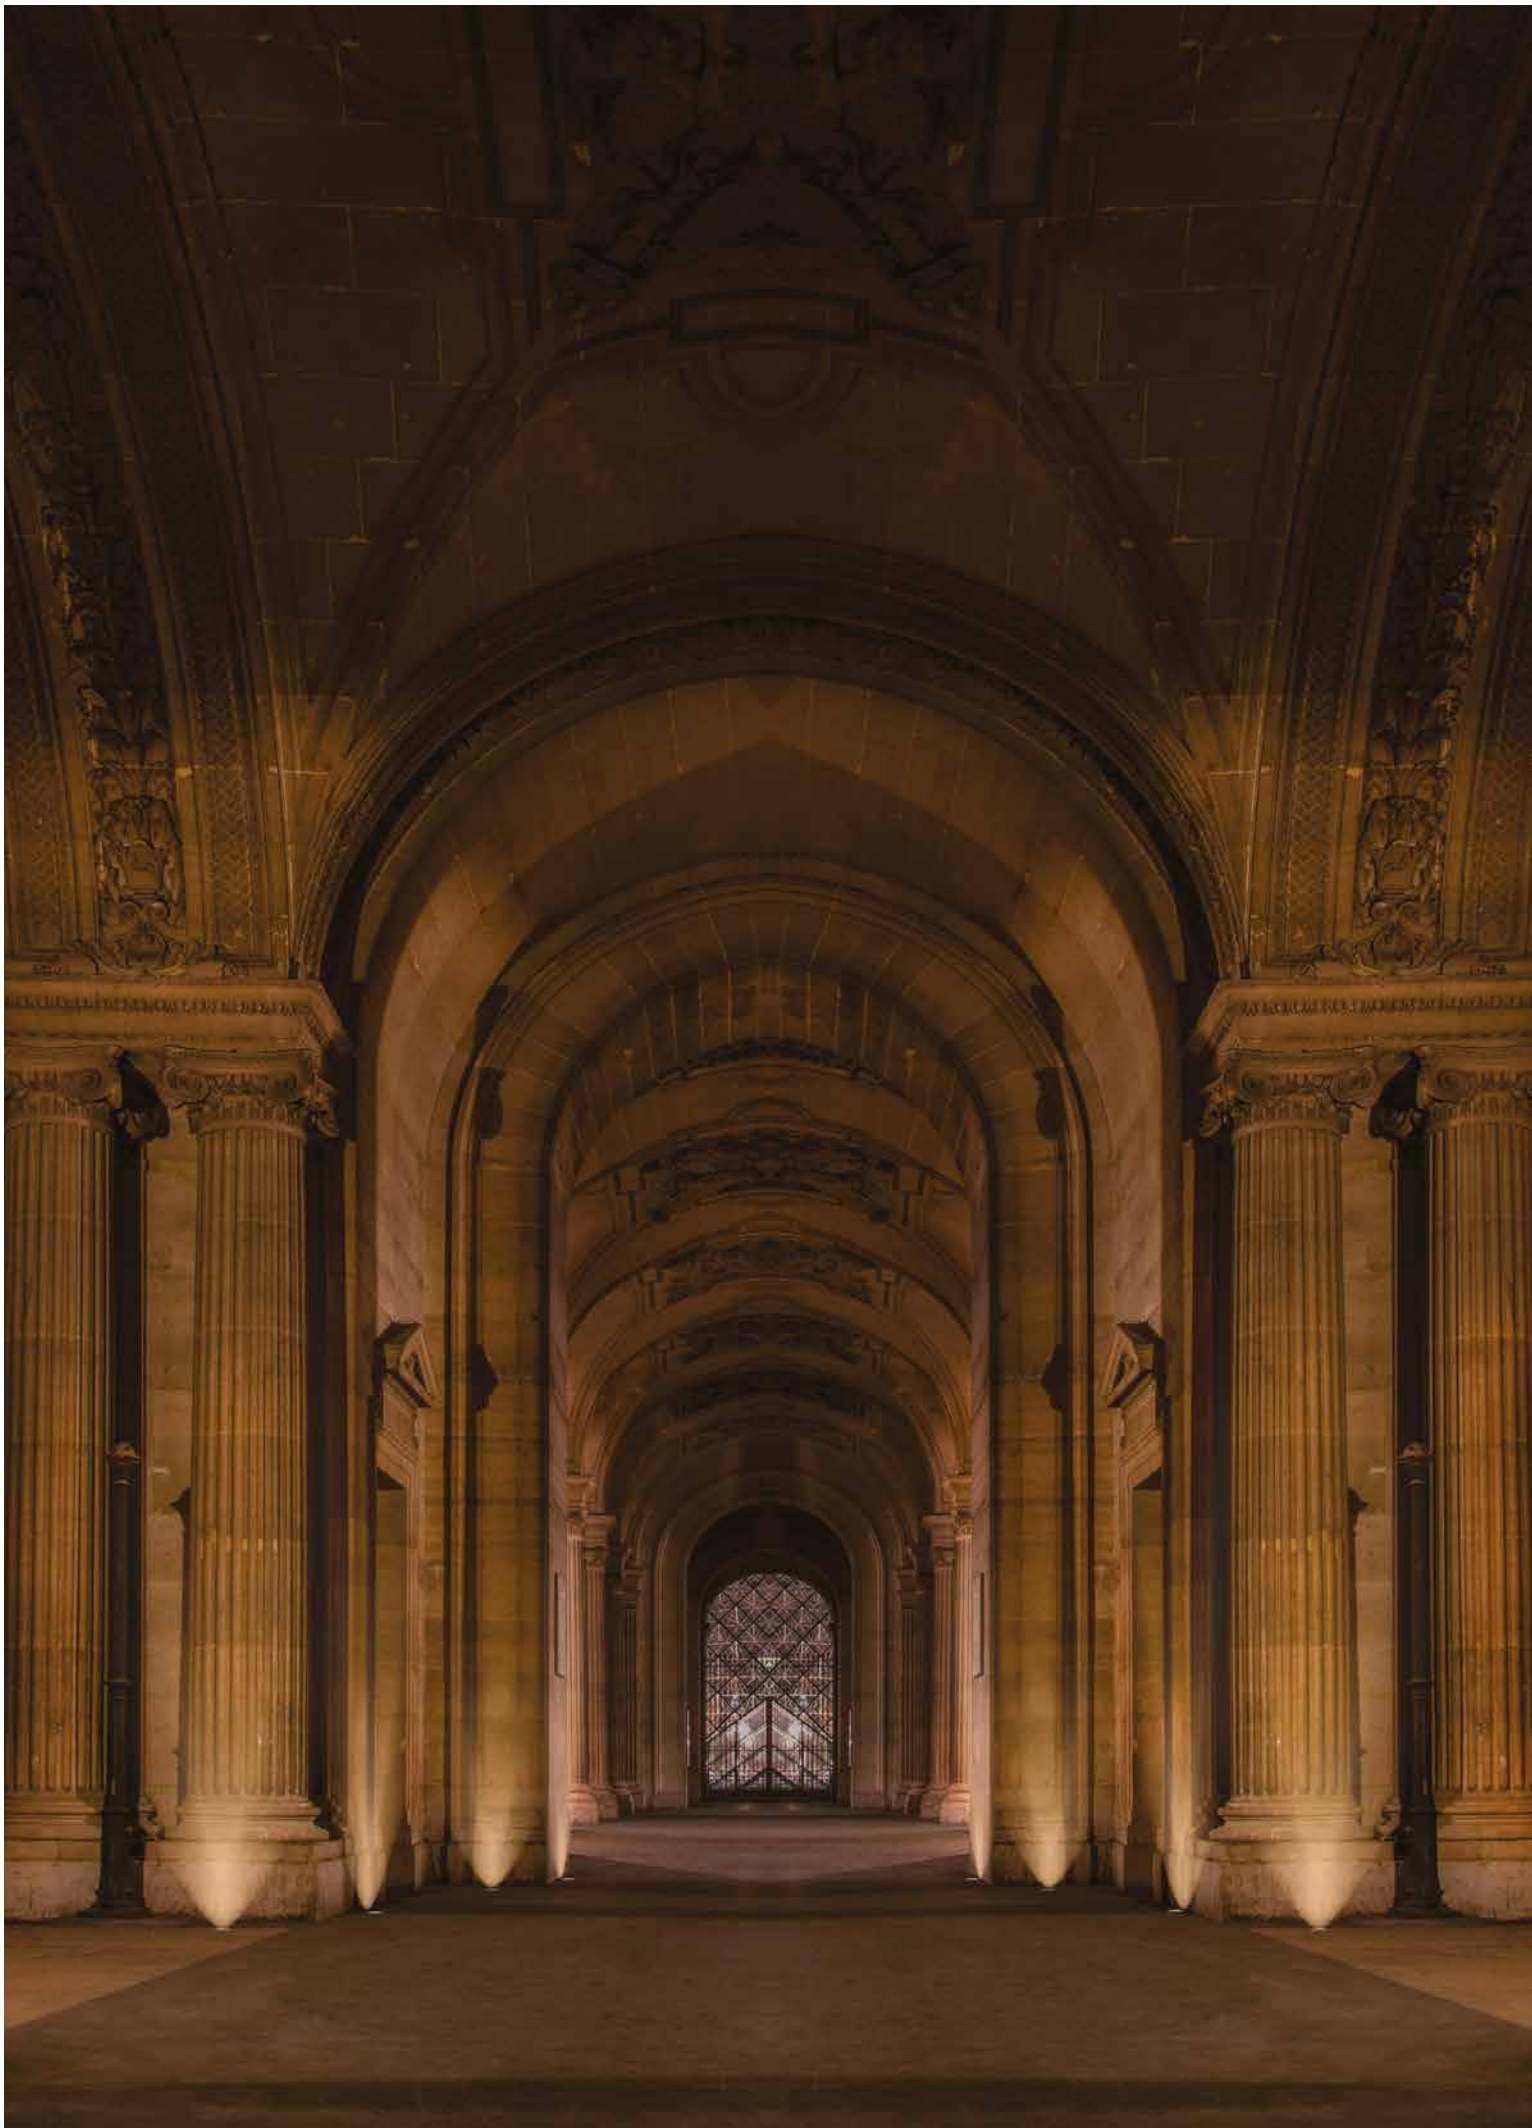


Zeppelin

Design U.T. EGOLUCE



Plasterboard spring included
Mueller de escayola incluido

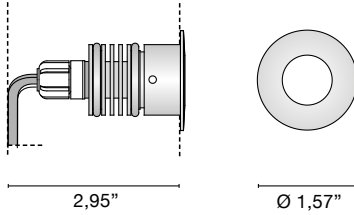


ROUND / RONDA

6348 _ _ / _ _ 0.18 lb

.33 ■ Stainless steel AISI 316L - Acero cepillado

/W	LED max 2W 500mA	209lm	4000K
/WW	LED max 2W 500mA	199lm	3000K
/XW	LED max 2W 500mA	189lm	2700K

Wide beam / Haz de luz ancho

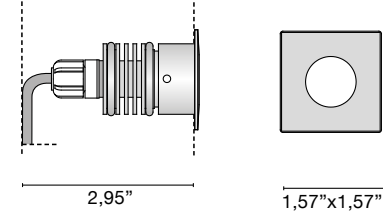

FRAMEWORK / MARCO

6349 _ _ / _ _ 0.22 lb

.33 ■ Stainless steel AISI 316L - Acero cepillado

/W	LED max 2W 500mA	209lm	4000K
/WW	LED max 2W 500mA	199lm	3000K
/XW	LED max 2W 500mA	189lm	2700K

Wide beam / Haz de luz ancho



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0216




Kit draining junction box + IP68 connector
Kit de encofrado de drenaje + conector IP68

0220

DRIVERS CONDUCTORES

0127	Drivers 500 mA - 1-6 Zeppelin
0128	Drivers 350 mA - 1-10 Zeppelin
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-11 Zeppelin
0141/DALI	Multi-power DALI dimmable driver - 1-11 Zeppelin
0145/DALI	Multi-power DALI dimmable driver - 1-21 Zeppelin

Only serial connection - Solo conexión serie

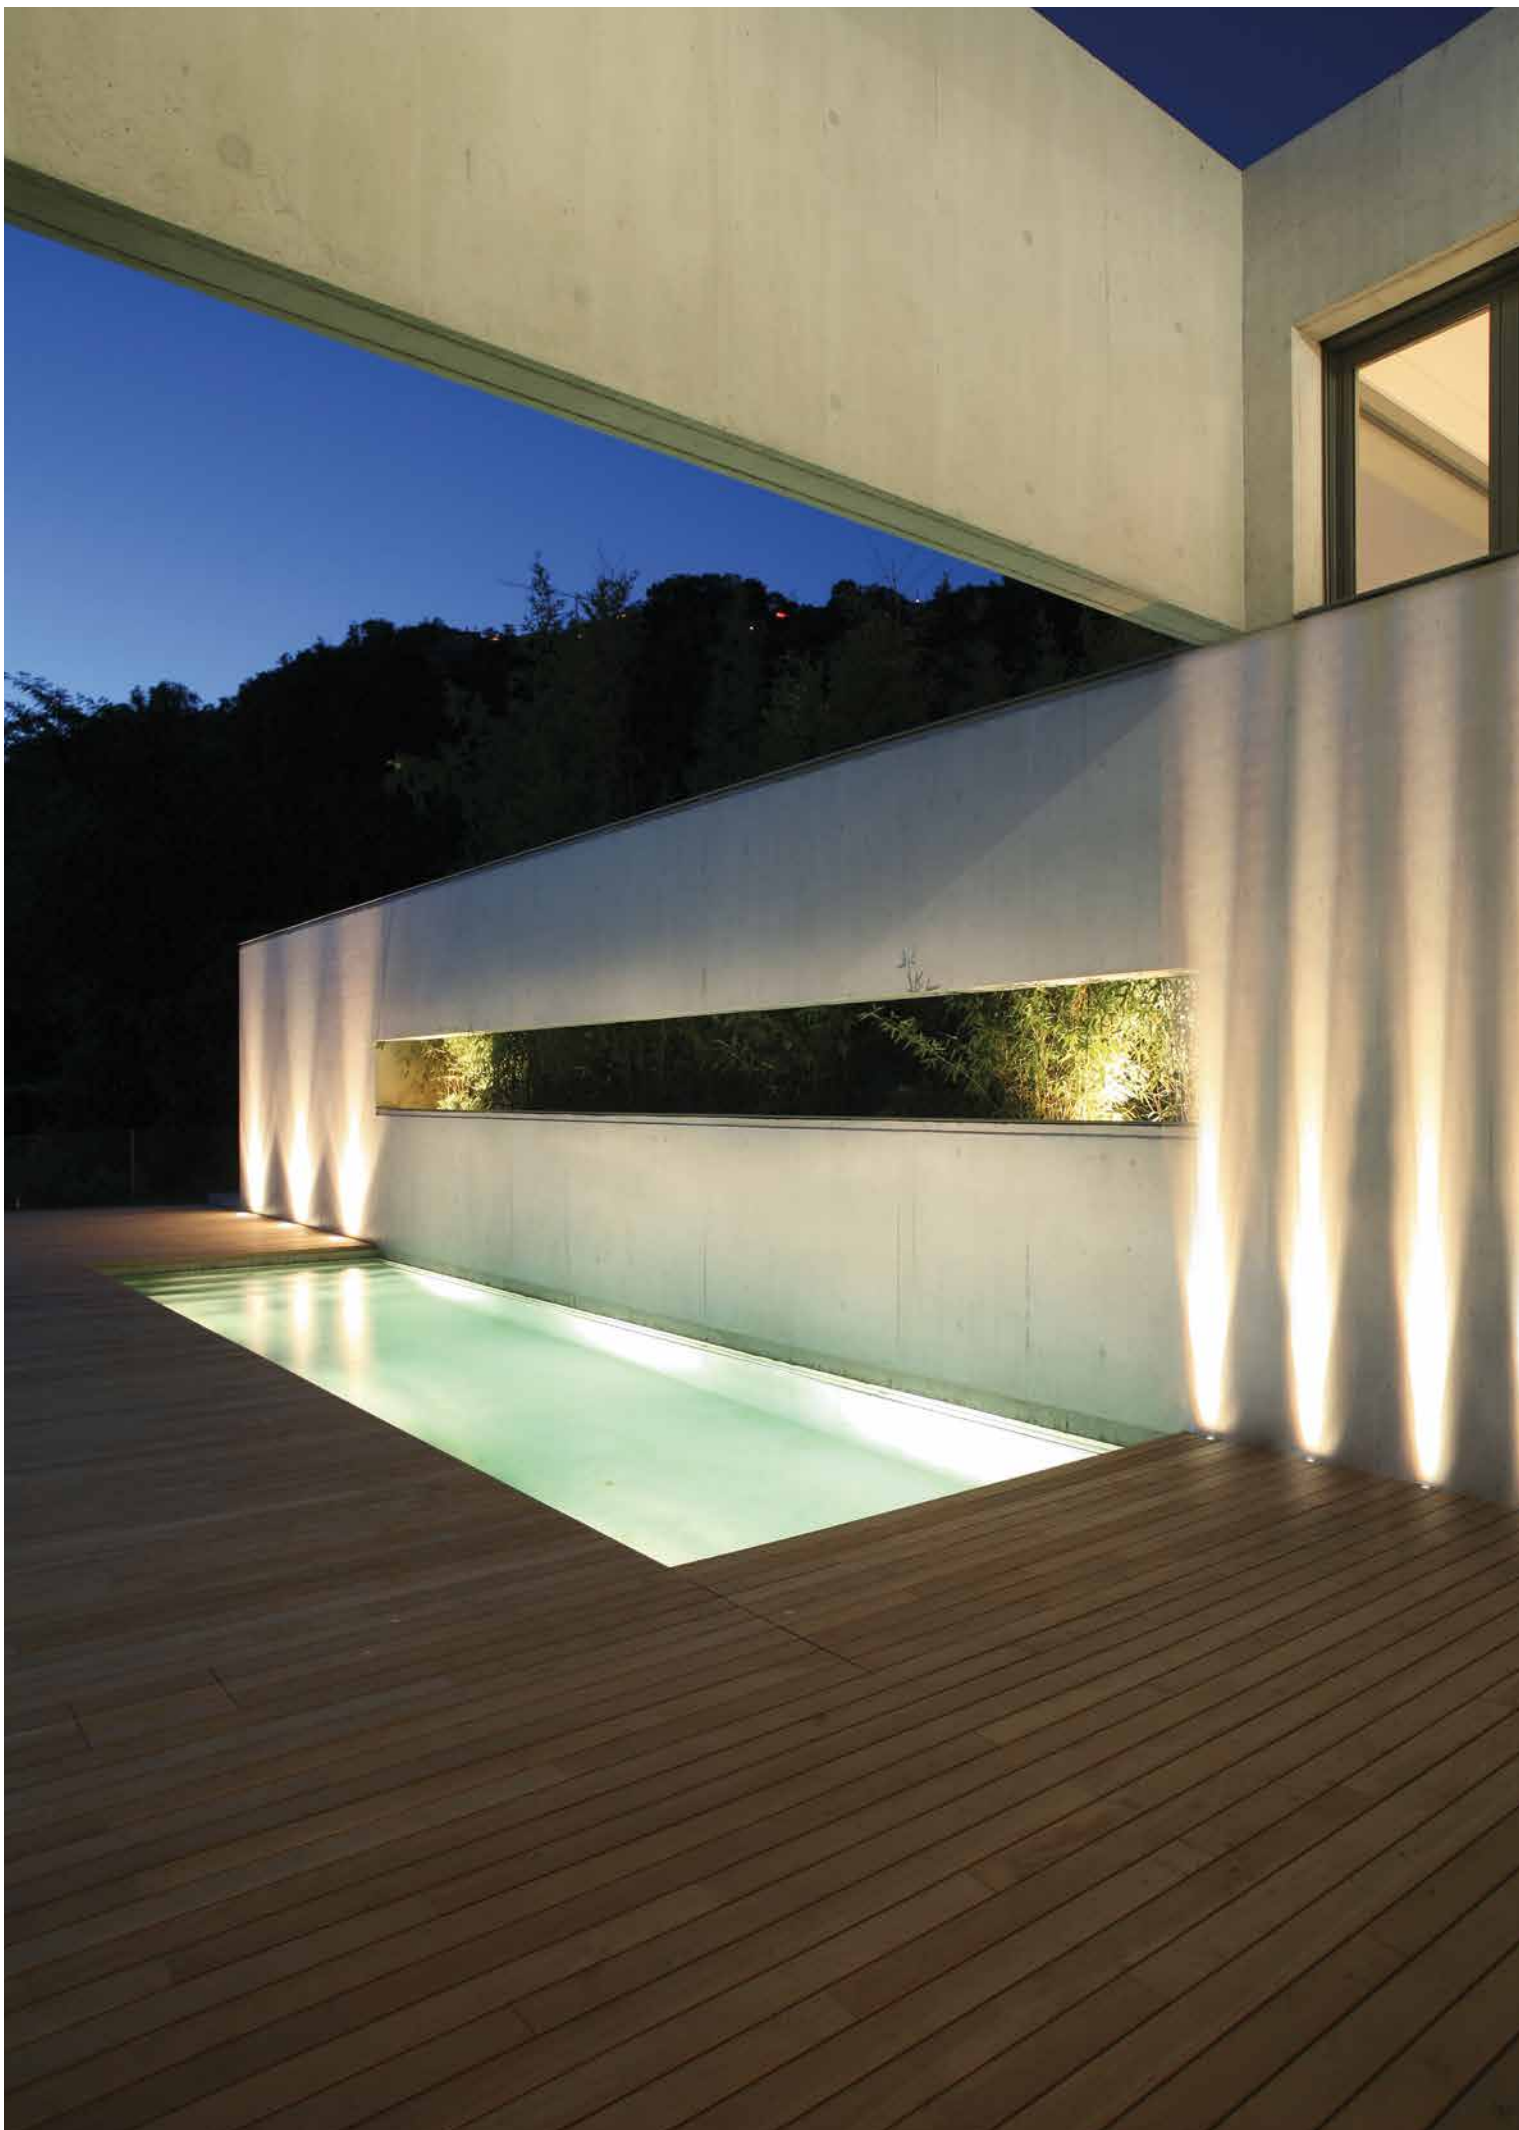


Zeppelin 25 Plus

Design U.T. EGOLUCE



Plasterboard spring included
Muelle de escayola incluido

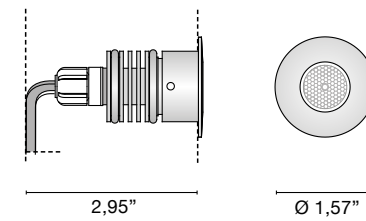


ROUND / RONDA

6384. _ / _ _ 0.20 lb

.33 ■ Stainless steel AISI 316L - Acero cepillado

Optic degree				
/W	/11	/25	/45	LED max 2W 500mA 209lm 4000K
/WW	/11	/25	/45	LED max 2W 500mA 199lm 3000K
/XW	/11	/25	/45	LED max 2W 500mA 189lm 2700K

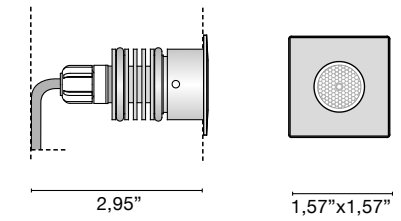

FRAMEWORK / MARCO

6394. _ / _ _ 0.22 lb

.33 ■ Stainless steel AISI 316L - Acero cepillado

Optic degree				
/W	/11	/25	/45	LED max 2W 500mA 209lm 4000K
/WW	/11	/25	/45	LED max 2W 500mA 199lm 3000K
/XW	/11	/25	/45	LED max 2W 500mA 189lm 2700K



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plástico

0216



Kit draining junction box + IP68 connector
Kit de encofrado de drenaje + conector IP68

0220

DRIVERS CONDUCTORES

0127 Drivers 500 mA - 1-6 Zeppelin 25 Plus

0128 Drivers 350 mA - 1-10 Zeppelin 25 Plus

0141/DIM Multi-power dimmable driver PUSH - 1...10V - 1-11 Zeppelin 25 Plus

0141/DALI Multi-power DALI dimmable driver - 1-11 Zeppelin 25 Plus

0145/DALI Multi-power DALI dimmable driver - 1-21 Zeppelin 25 Plus


Only serial connection - Solo conexión serie



Zeppelin Maxi

Design U.T. EGOLUCE


 INOX AISI 316L
 INOX AISI 316L

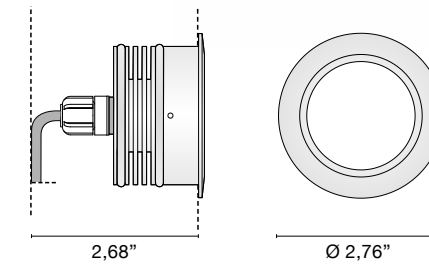


ROUND / RONDA

6368. / / / 0.88 lb

.33 ■ Stainless steel AISI 316L - Acero cepillado

/W	LED max 3x1W 350mA	453lm	4000K
/WW	LED max 3x1W 350mA	429lm	3000K
/XW	LED max 3x1W 350mA	405lm	2700K

Wide beam / Haz de luz ancho

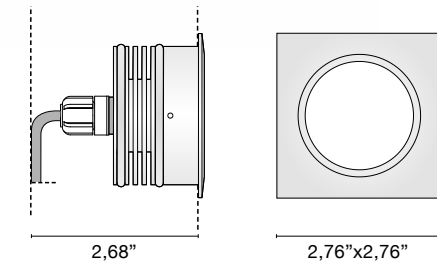

FRAMEWORK / MARCO

6383. / / / 0.77 lb

.33 ■ Stainless steel AISI 316L - Acero cepillado

/W	LED max 3x1W 350mA	453lm	4000K
/WW	LED max 3x1W 350mA	429lm	3000K
/XW	LED max 3x1W 350mA	405lm	2700K

Wide beam / Haz de luz ancho



ACCESSORIES ACCESORIOS



Kit draining junction box + IP68 connector
 Kit de encofrado de drenaje + conector IP68

0230



Wall Plastic Box
 Encofrado de muros

0232



Spring for plasterboard
 Accesorio de montaje en cartón yeso

2,36"

0260

DRIVERS CONDUCTORES


0128	Drivers 350 mA - 1-3 Zeppelin Maxi
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-4 Zeppelin Maxi
0141/DALI	Multi-power DALI dimmable driver - 1-4 Zeppelin Maxi

0145	Multi-power dimmable driver PUSH - 1...10V - 1-7 Zeppelin Maxi
0145/DALI	Multi-power DALI dimmable driver - 1-7 Zeppelin Maxi

Only serial connection - Solo conexión serie

Zeppelin Maxi

Design U.T. EGOLUCE




Zeppelin COB

Design U.T. EGOLUCE



INOX AISI 316L
INOX AISI 316L

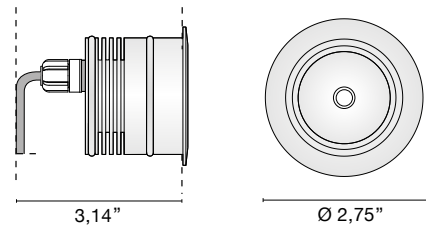

6397. _ _ / _ _ / _ _ 0.88 lb

.33 ■ Stainless steel AISI 316L - Acero cepillado

Optic degree				
/W	/28 /60	LED 8,9W 500mA	1353lm	4000K
/WW	/28 /60	LED 8,9W 500mA	1303lm	3000K
/XW	/28 /60	LED 8,9W 500mA	1263lm	2700K



ACCESSORIES ACCESORIOS



2,36"

Spring for plasterboard
Accesorio de montaje en cartón yeso

0260/C



DRIVERS CONDUCTORES

0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-2 Zeppelin Maxi COB
0141/DALI	Multi-power DALI dimmable driver - 1-2 Zeppelin Maxi COB
0145	Multi-power dimmable driver PUSH - 1...10V - 1-3 Zeppelin Maxi COB

0145/DALI	Multi-power DALI dimmable driver - 1-3 Zeppelin Maxi COB
0127	500 mA - 1 COB led
0128	350 mA - 1-2 COB LED


Only serial connection - Solo conexión serie



Zeppelin turnable

Design U.T. EGOLUCE

IP67 2205 B 50°C 11.81° R 2.36" ETL INOX AISI 316L INOX AISI 316L

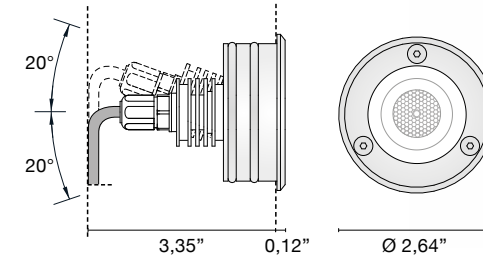

6411 _ / _ / _ 0.49 lb

.33 ■ Stainless steel AISI 316L - *Acero cepillado*

	Optic degree				
/W	/11 /25 /45	LED max 2W 500mA	209lm	4000K	
/WW	/11 /25 /45	LED max 2W 500mA	199lm	3000K	
/XW	/11 /25 /45	LED max 2W 500mA	189lm	2700K	



DRIVERS CONDUCTORES

0127	Drivers 500 mA - 1-6 Zeppelin turnable
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-11 Zeppelin turnable
0141/DALI	Multi-power DALI dimmable driver - 1-11 Zeppelin turnable
0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Zeppelin turnable
0145/DALI	Multi-power DALI dimmable driver - 1-21 Zeppelin turnable

ACCESSORIES ACCESORIOS



Kit draining junction box + IP68 connector
Kit de encofrado de drenaje + conector IP68

0230



Wall Plastic Box
Encofrado de muros

0232



Spring for plasterboard
Accesorio de montaje en cartón yeso

0238

2,36"

Only serial connection - *Solo conexión serie*

OUTDOOR


Tris

Design U.T. EgoLucé



Walkable recessed outdoor spot (IP 67) with frame in stainless steel AISI 316L and heat sink in aluminum. Neoprene cable 11,81" Transparent safety glass. Mounting with the recessed box or in plasterboards employing a specific accessory (art. 0233).


Proyector empotrable orientable para exteriores (IP 67) con marco de acero inoxidable AISI 316L y disipador de calor de aluminio. Cable de neopreno de 11,81". Cristal de seguridad transparente. Montaje con caja de empotrar o pladur con accesorio especial (art. 0233).

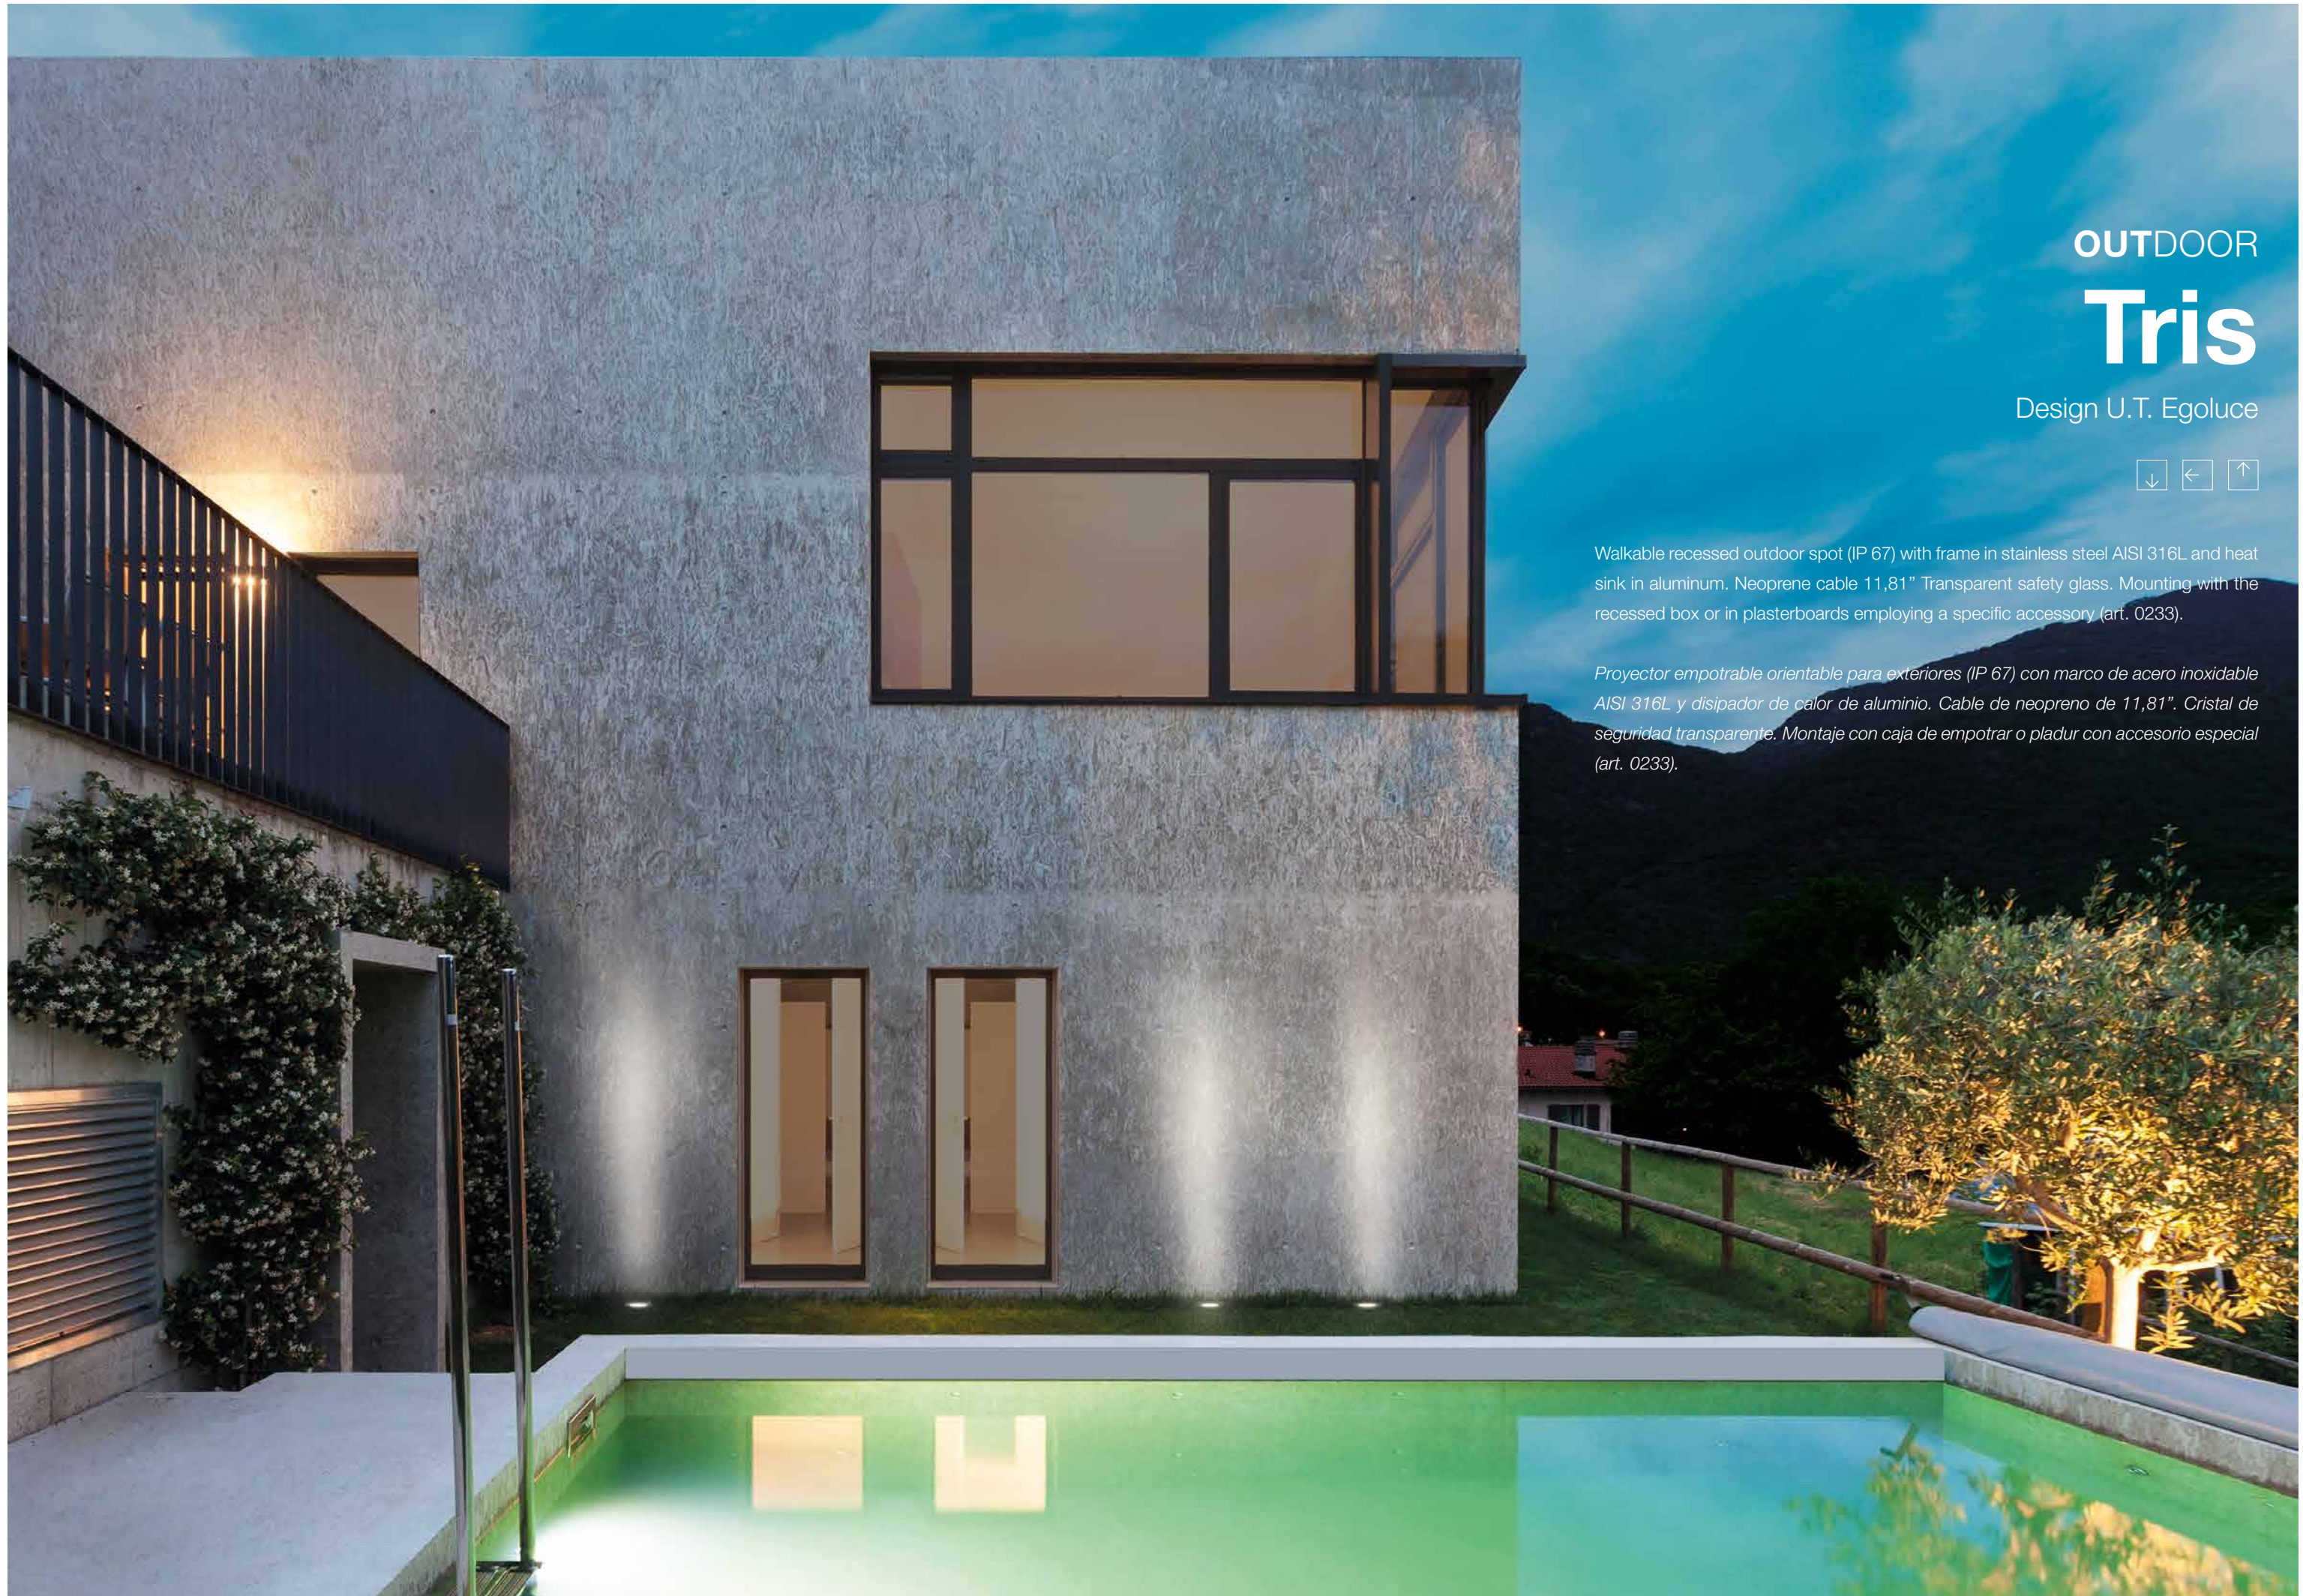



Tris

Design U.T. EGOLUCE

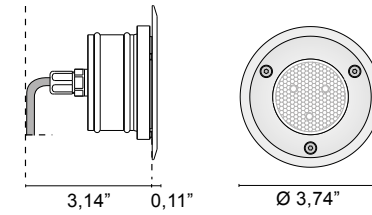

6371 _____ 0.88 lb

.33 ■ Stainless steel AISI 316L - *Acero cepillado*

	Optic degree				
/W	/10	/25	LED max 3x2W 500mA	627lm	4000K
/WW	/10	/25	LED max 3x2W 500mA	597lm	3000K
/XW	/10	/25	LED max 3x2W 500mA	567lm	2700K



ACCESSORIES ACCESORIOS



Kit draining junction box + IP connector
Kit de encofrado de drenaje + conector IP

0231



Wall Plastic Box
Encofrado de muros

0235



Spring for plasterboard
Accesorio de montaje en cartón yeso

3,35"

0233

DRIVERS CONDUCTORES

0127	Drivers 500 mA - 1-2 Tris
0128	Drivers 350 mA - 1-3 Tris
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-3 Tris

0141/DALI	Multi-power DALI dimmable driver - 1-3 Tris
0145	Multi-power dimmable driver PUSH - 1...10V - 1-7 Tris
0145/DALI	Multi-power DALI dimmable driver - 1-7 Tris

Only serial connection - *Solo conexión serie*

OUTDOOR
Drive

Design U.T. Egoluce



Drive over the recessed spot (IP 67) with frame in stainless steel AISI 316L and aluminum heat sink. Neoprene cable 11,81" diffuser in matt glass mountable with recessed box.


Unidad empotrada (IP 67) con marco de acero inoxidable AISI 316L y disipador de calor de aluminio. Cable de neopreno 11,81" difusor de cristal opaco montable con caja de empotrar.



Drive

Design U.T. EGOLUCE

IP67 50°C 11.81° 2.36° ENEC INOX AISI 316L INOX AISI 316L

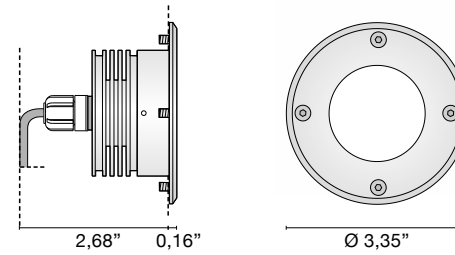

6366. _ _ / _ _ 0.88 lb

.33 ■ Stainless steel AISI 316L - Acero cepillado

/W	4000K	LED max 3x1W CRI>90	453lm
/WW	3000K	LED max 3x1W CRI>90	429lm



ACCESSORIES ACCESORIOS



Kit draining junction box + IP68 connector
 Kit de encofrado de drenaje + conector IP68

0229

DRIVERS CONDUCTORES

0128	Drivers 350 mA - 1-3 Drive
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-4 Drive
0141/DALI	Multi-power DALI dimmable driver - 1-4 Drive

0145	Multi-power dimmable driver PUSH - 1...10V - 1-7 Drive
0145/DALI	Multi-power DALI dimmable driver - 1-7 Drive

Only serial connection - Solo conexión serie



OUTDOOR
Vista

Design U.T. EgoIuce



Walkable recessed spot (IP 67) with frame in stainless steel AISI 316L and aluminum heat sink. Neoprene cable 11,81", diffuser with antidazzling eyelid mountable with or without recessed box.

Proyector empotrable (IP 67) con marco de acero inoxidable AISI 316L y disipador de calor de aluminio. disipador térmico de aluminio. Cable de neopreno de 11,81", difusor con tapa antideslumbrante montable con o sin caja de empotrar.




Vista

Design U.T. EGOLUCE

IP67 1102 B 40°C

INOX AISI 316L
INOX AISI 316L

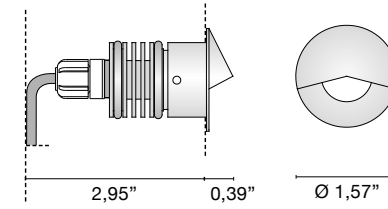

6362... / ... 0,22 lb

.33 ■ Stainless steel AISI 316L - Acero cepillado

/W 4000K LED max 2W CRI>90 209lm

/WW 3000K LED max 2W CRI>90 199lm

/XW 2700K LED max 2W CRI>90 189lm



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plástico

0216



Kit draining junction box + IP68 connector
Kit de encofrado de drenaje + conector IP68

0220

DRIVERS CONDUCTORES

0127 Drivers 500 mA - 1-6 Vista

0128 Drivers 350 mA - 1-10 Vista

0141/DIM Multi-power dimmable driver PUSH - 1...10V - 1-11 Vista

0141/DALI Multi-power DALI dimmable driver - 1-11 Vista



0145 Multi-power dimmable driver PUSH - 1...10V - 1-21 Vista

0145/DALI Multi-power DALI dimmable driver - 1-21 Vista

Only serial connection - Solo conexión serie


Vista

Design U.T. EGOLUCE

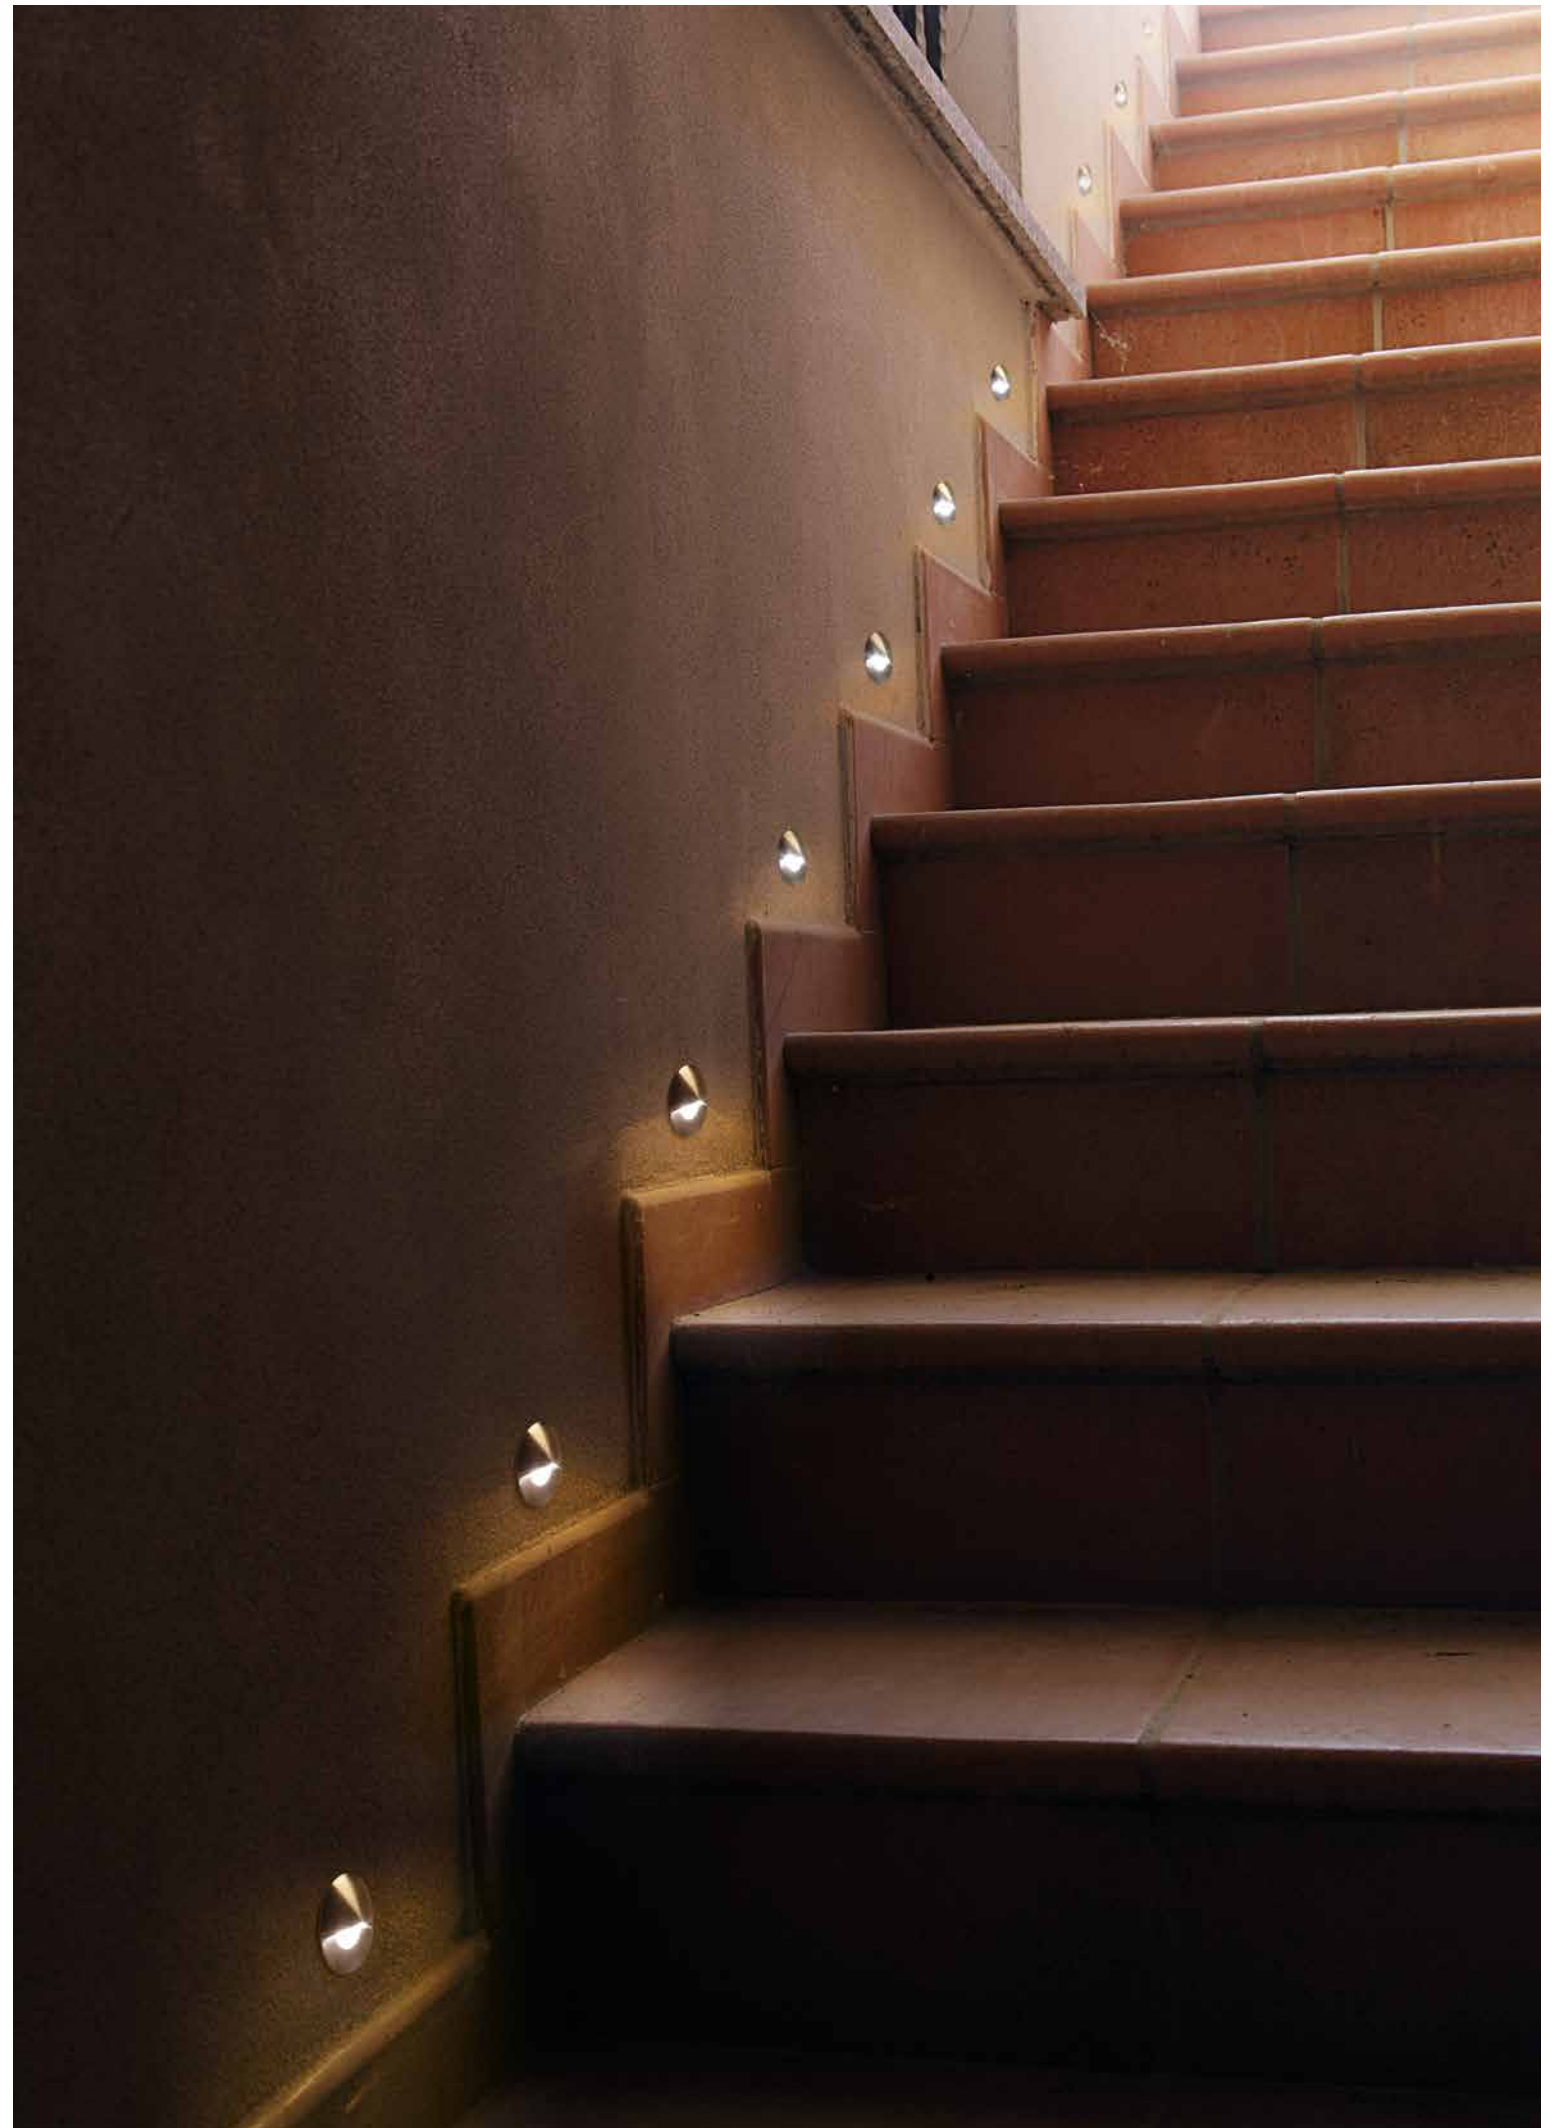

OUTDOOR
Kross

Design U.T. EgoLucé





Walkable recessed spot (IP 67) with frame in stainless steel AISI 316L and aluminum heat sink. Neoprene cable 11,81" montable with or without a recessed box.

Proyector empotrable transitable (IP 67) con marco de acero inoxidable AISI 316L y disipador de calor de aluminio. Cable de neopreno de 11,81" montable con o sin caja empotrada.

Kross

Design U.T. EGOLUCE

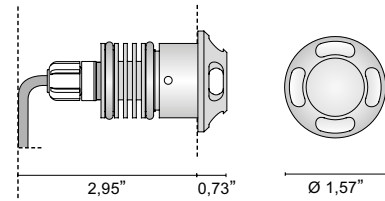

6361. _ _ / _ _ 0.22 lb

.33 ■ Stainless steel AISI 316L - *Acero cepillado*

/W 4000K LED max 2W CRI>90 209lm

/WW 3000K LED max 2W CRI>90 199lm

/XW 2700K LED max 2W CRI>90 189lm



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0216

Kit draining junction box + IP68
connector
*Kit de encofrado de drenaje +
conector IP68*

0220

DRIVERS CONDUCTORES

0127 Drivers 500 mA - 1-6 Kross

0128 Drivers 350 mA - 1-10 Kross


0141/DIM Multi-power dimmable driver PUSH - 1...10V - 1-11 Kross

0141/DALI Multi-power DALI dimmable driver - 1-11 Kross

0145 Multi-power dimmable driver PUSH - 1...10V - 1-21 Kross

0145/DALI Multi-power DALI dimmable driver - 1-21 Kross

Only serial connection - *Solo conexión serie*

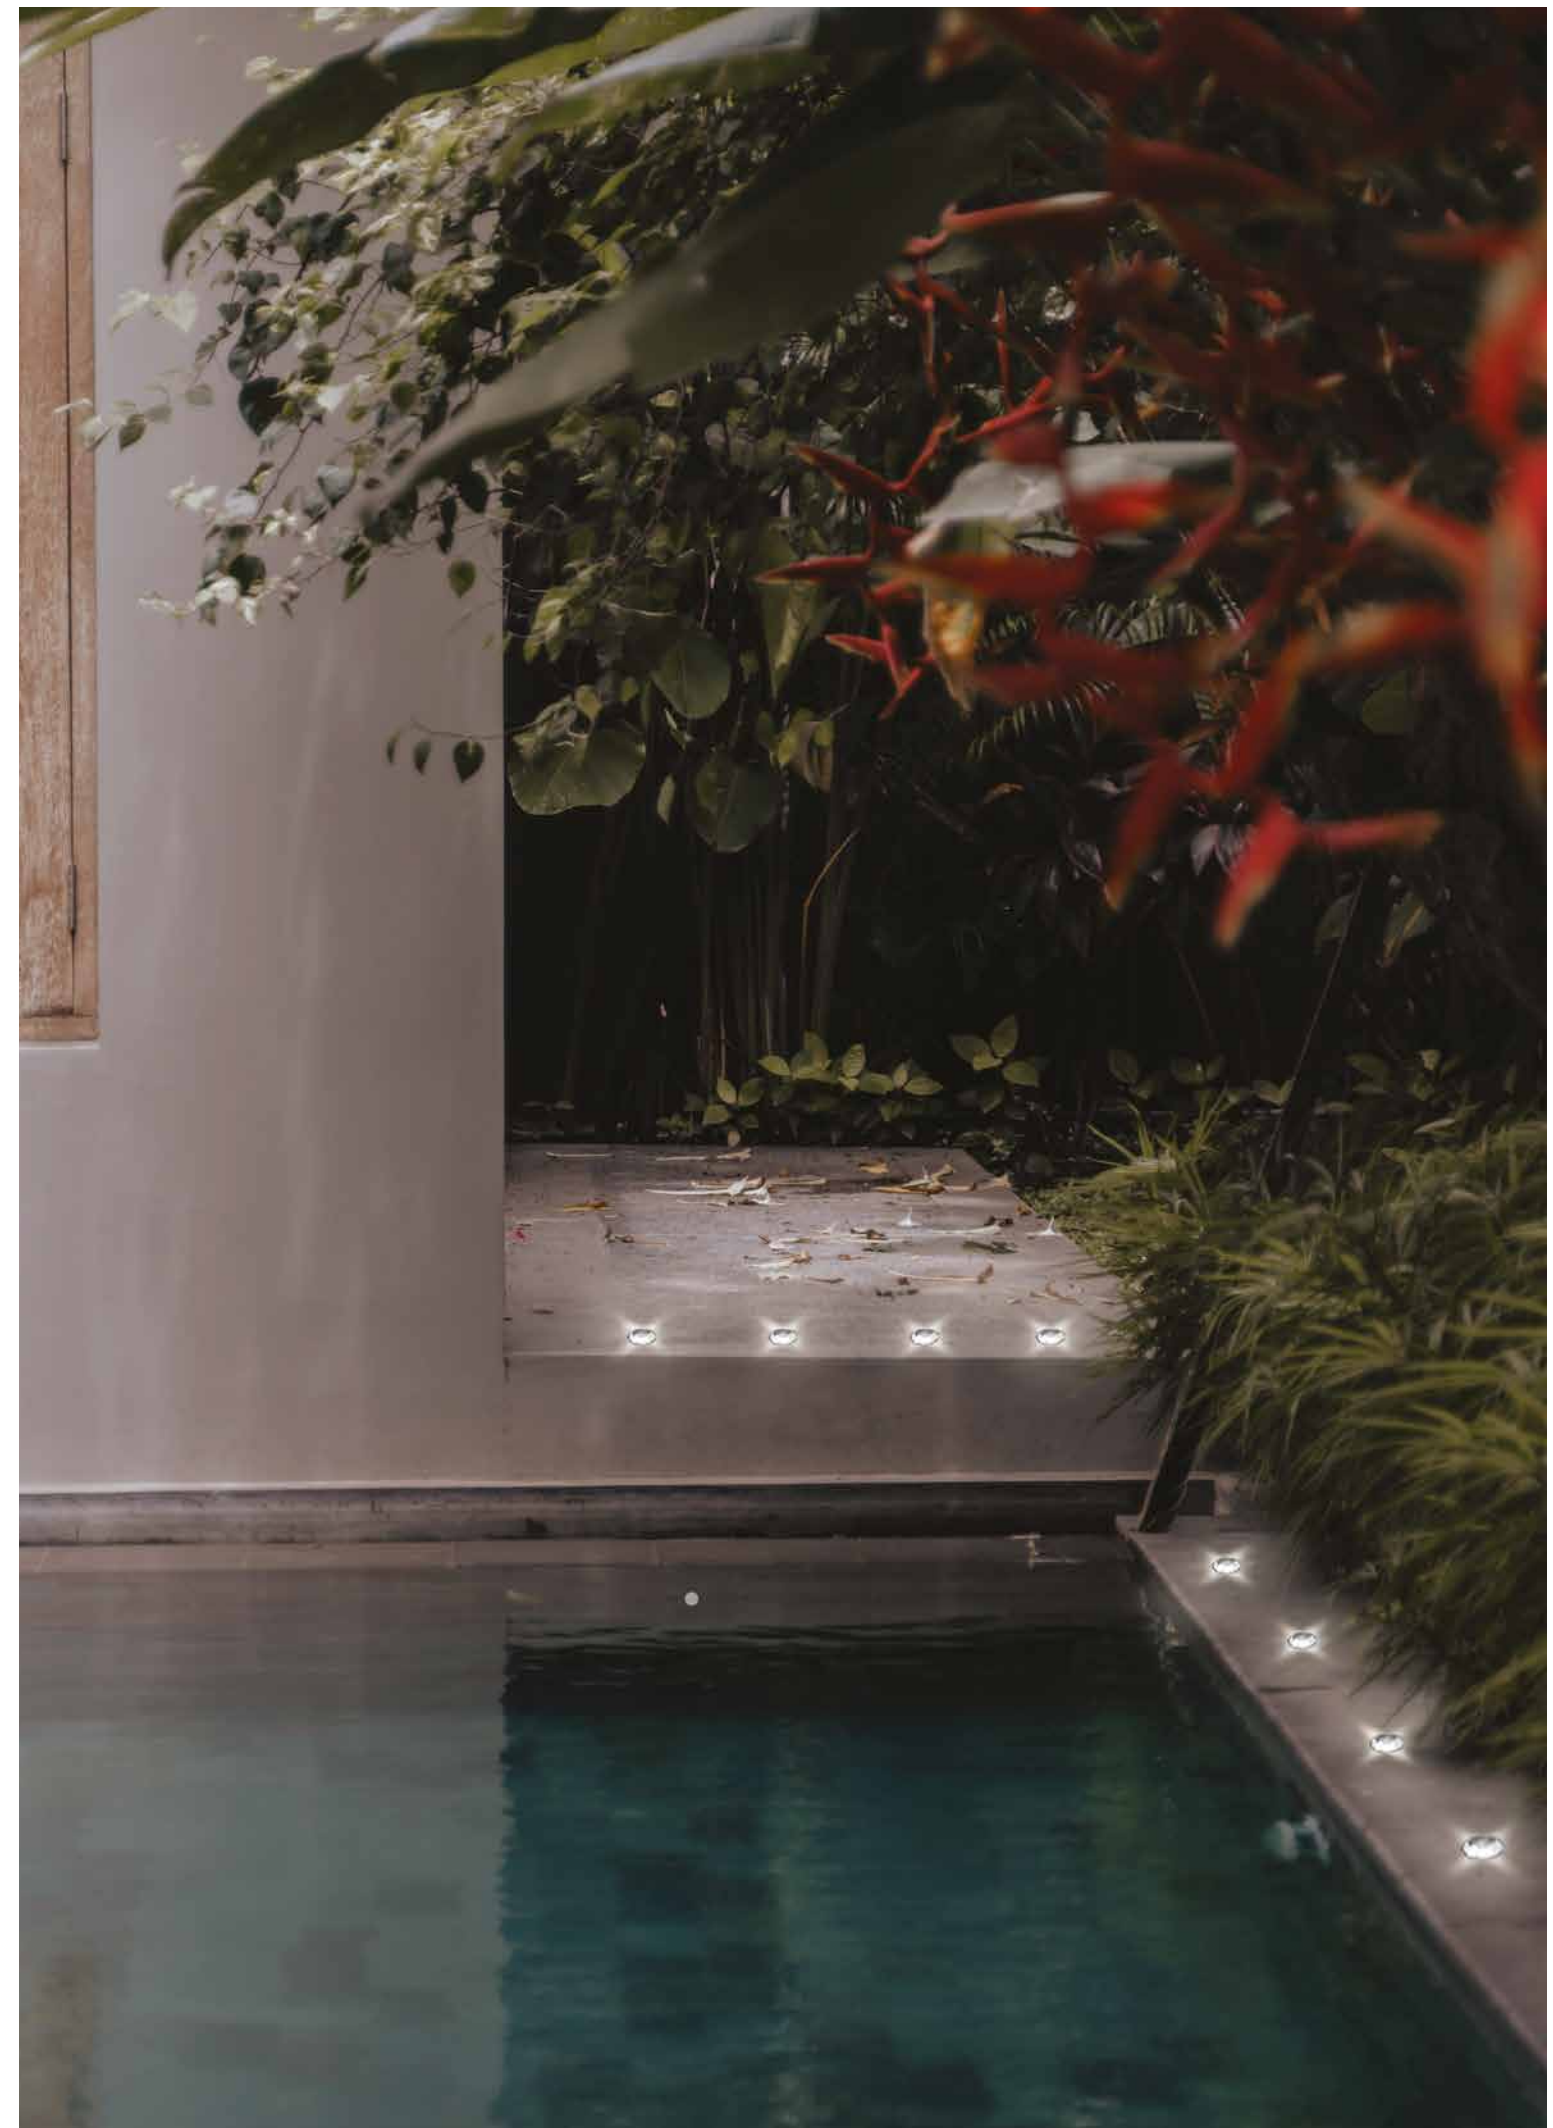


OUTDOOR
Step

Design U.T. EgoLucé




Outdoor recessed spot (IP 55) for asymmetric light in anodized aluminium (reinforced anodizing for outdoor) or white lacquered finish. Neoprene cable 11,81" Available in round and square version. Mounting with recessed box.

Foco empotrable para exterior (IP 55) con luz asimétrica en aluminio anodizado (anodizado reforzado para exterior) o lacado en blanco. Cable de neopreno de 11,81". Disponible en versiones redonda y cuadrada. Montaje con caja empotrada.

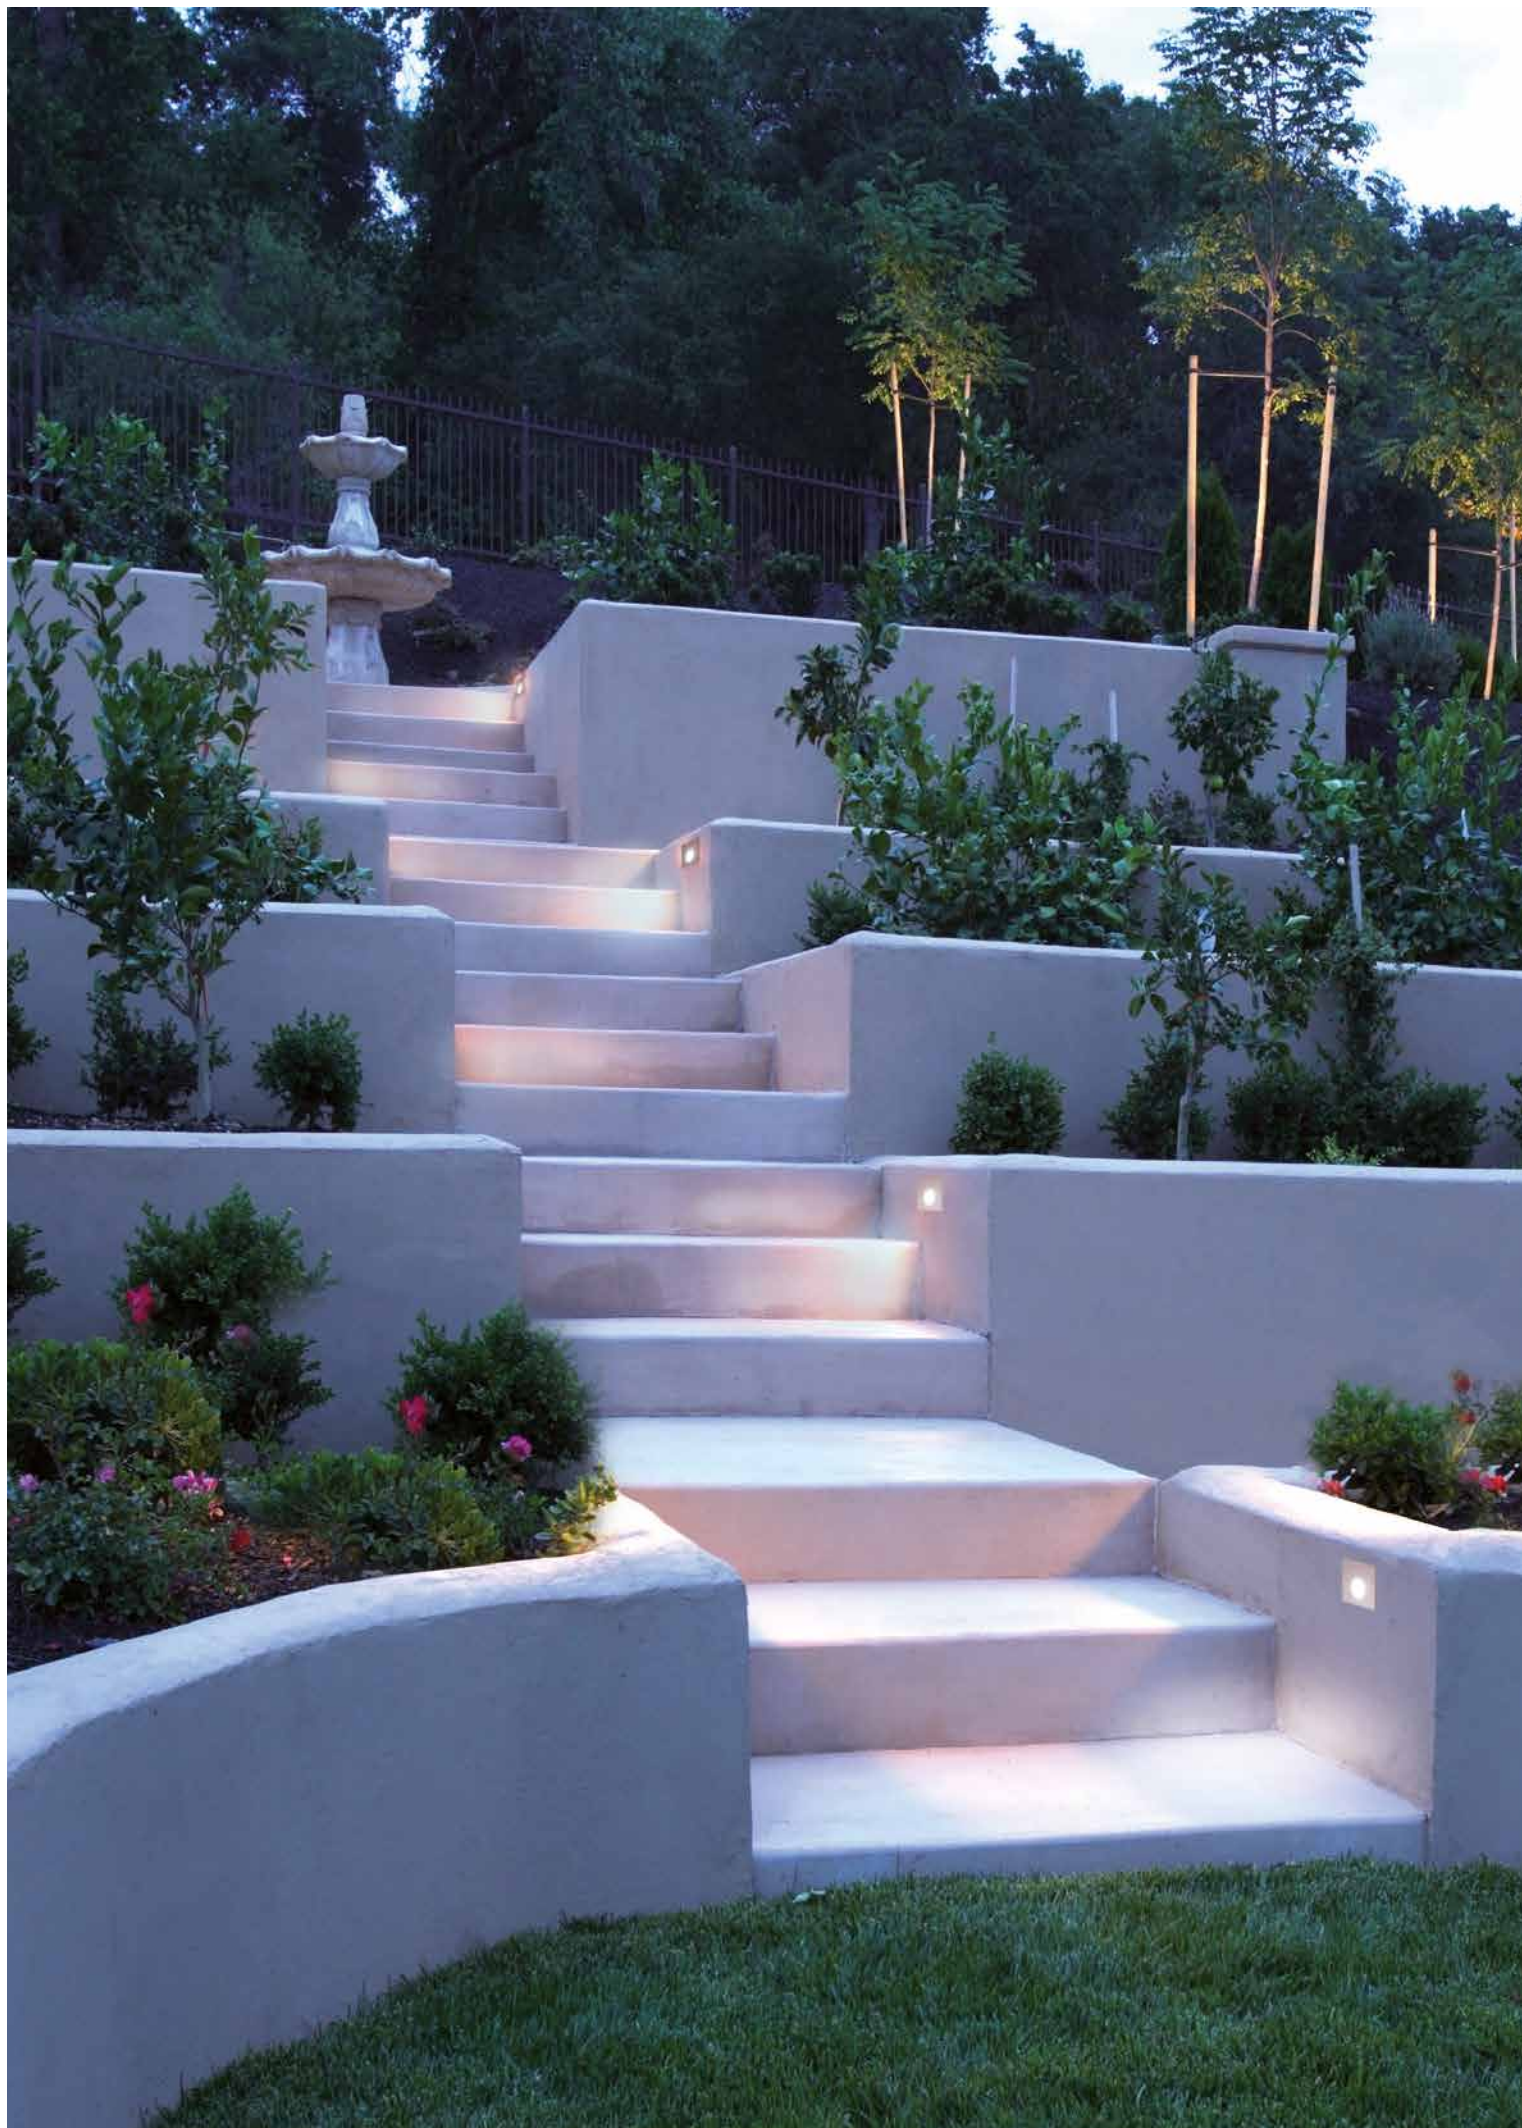

Step


Design U.T. EGOLUCE

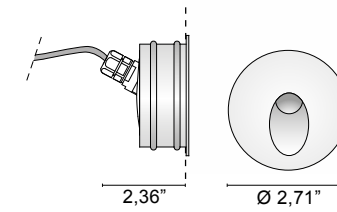

6387... / ... 0.53 lb

- .01** White - Blanco
- .45** Aluminium anodized - Aluminio anodizado

/W	4000K	LED max 2W CRI>90	209lm
/WW	3000K	LED max 2W CRI>90	199lm
/XW	2700K	LED max 2W CRI>90	189lm

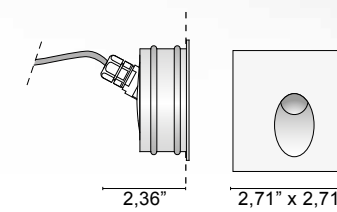

6369... / ... 0.66 lb

- .01** White - Blanco
- .45** Aluminium anodized - Aluminio anodizado

/W	4000K	LED max 2W CRI>90	209lm
/WW	3000K	LED max 2W CRI>90	199lm
/XW	2700K	LED max 2W CRI>90	189lm



ACCESSORIES ACCESORIOS



Wall Plastic Box
Encofrado de muros

0232

DRIVERS CONDUCTORES


0127	Drivers 500 mA - 1-6 Step
0128	Drivers 350 mA - 1-10 Step
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-11 Step

0141/DALI	Multi-power DALI dimmable driver - 1-11 Step
0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Step
0145/DALI	Multi-power DALI dimmable driver - 1-21 Step

Only serial connection - Solo conexión serie


OUTDOOR Soft


Design U.T. EgoLucé



Recessed spot (IP 67) with frame in stainless steel AISI 316L. Frosted safety glass
Neoprene cable 11,81". PARALLEL CONNECTION.



*Foco empotrable (IP 67) con marco de acero inoxidable AISI 316L. Cristal de seguridad
esmerilado Cable de neopreno de 11,81". CONEXIÓN EN PARALELO.*

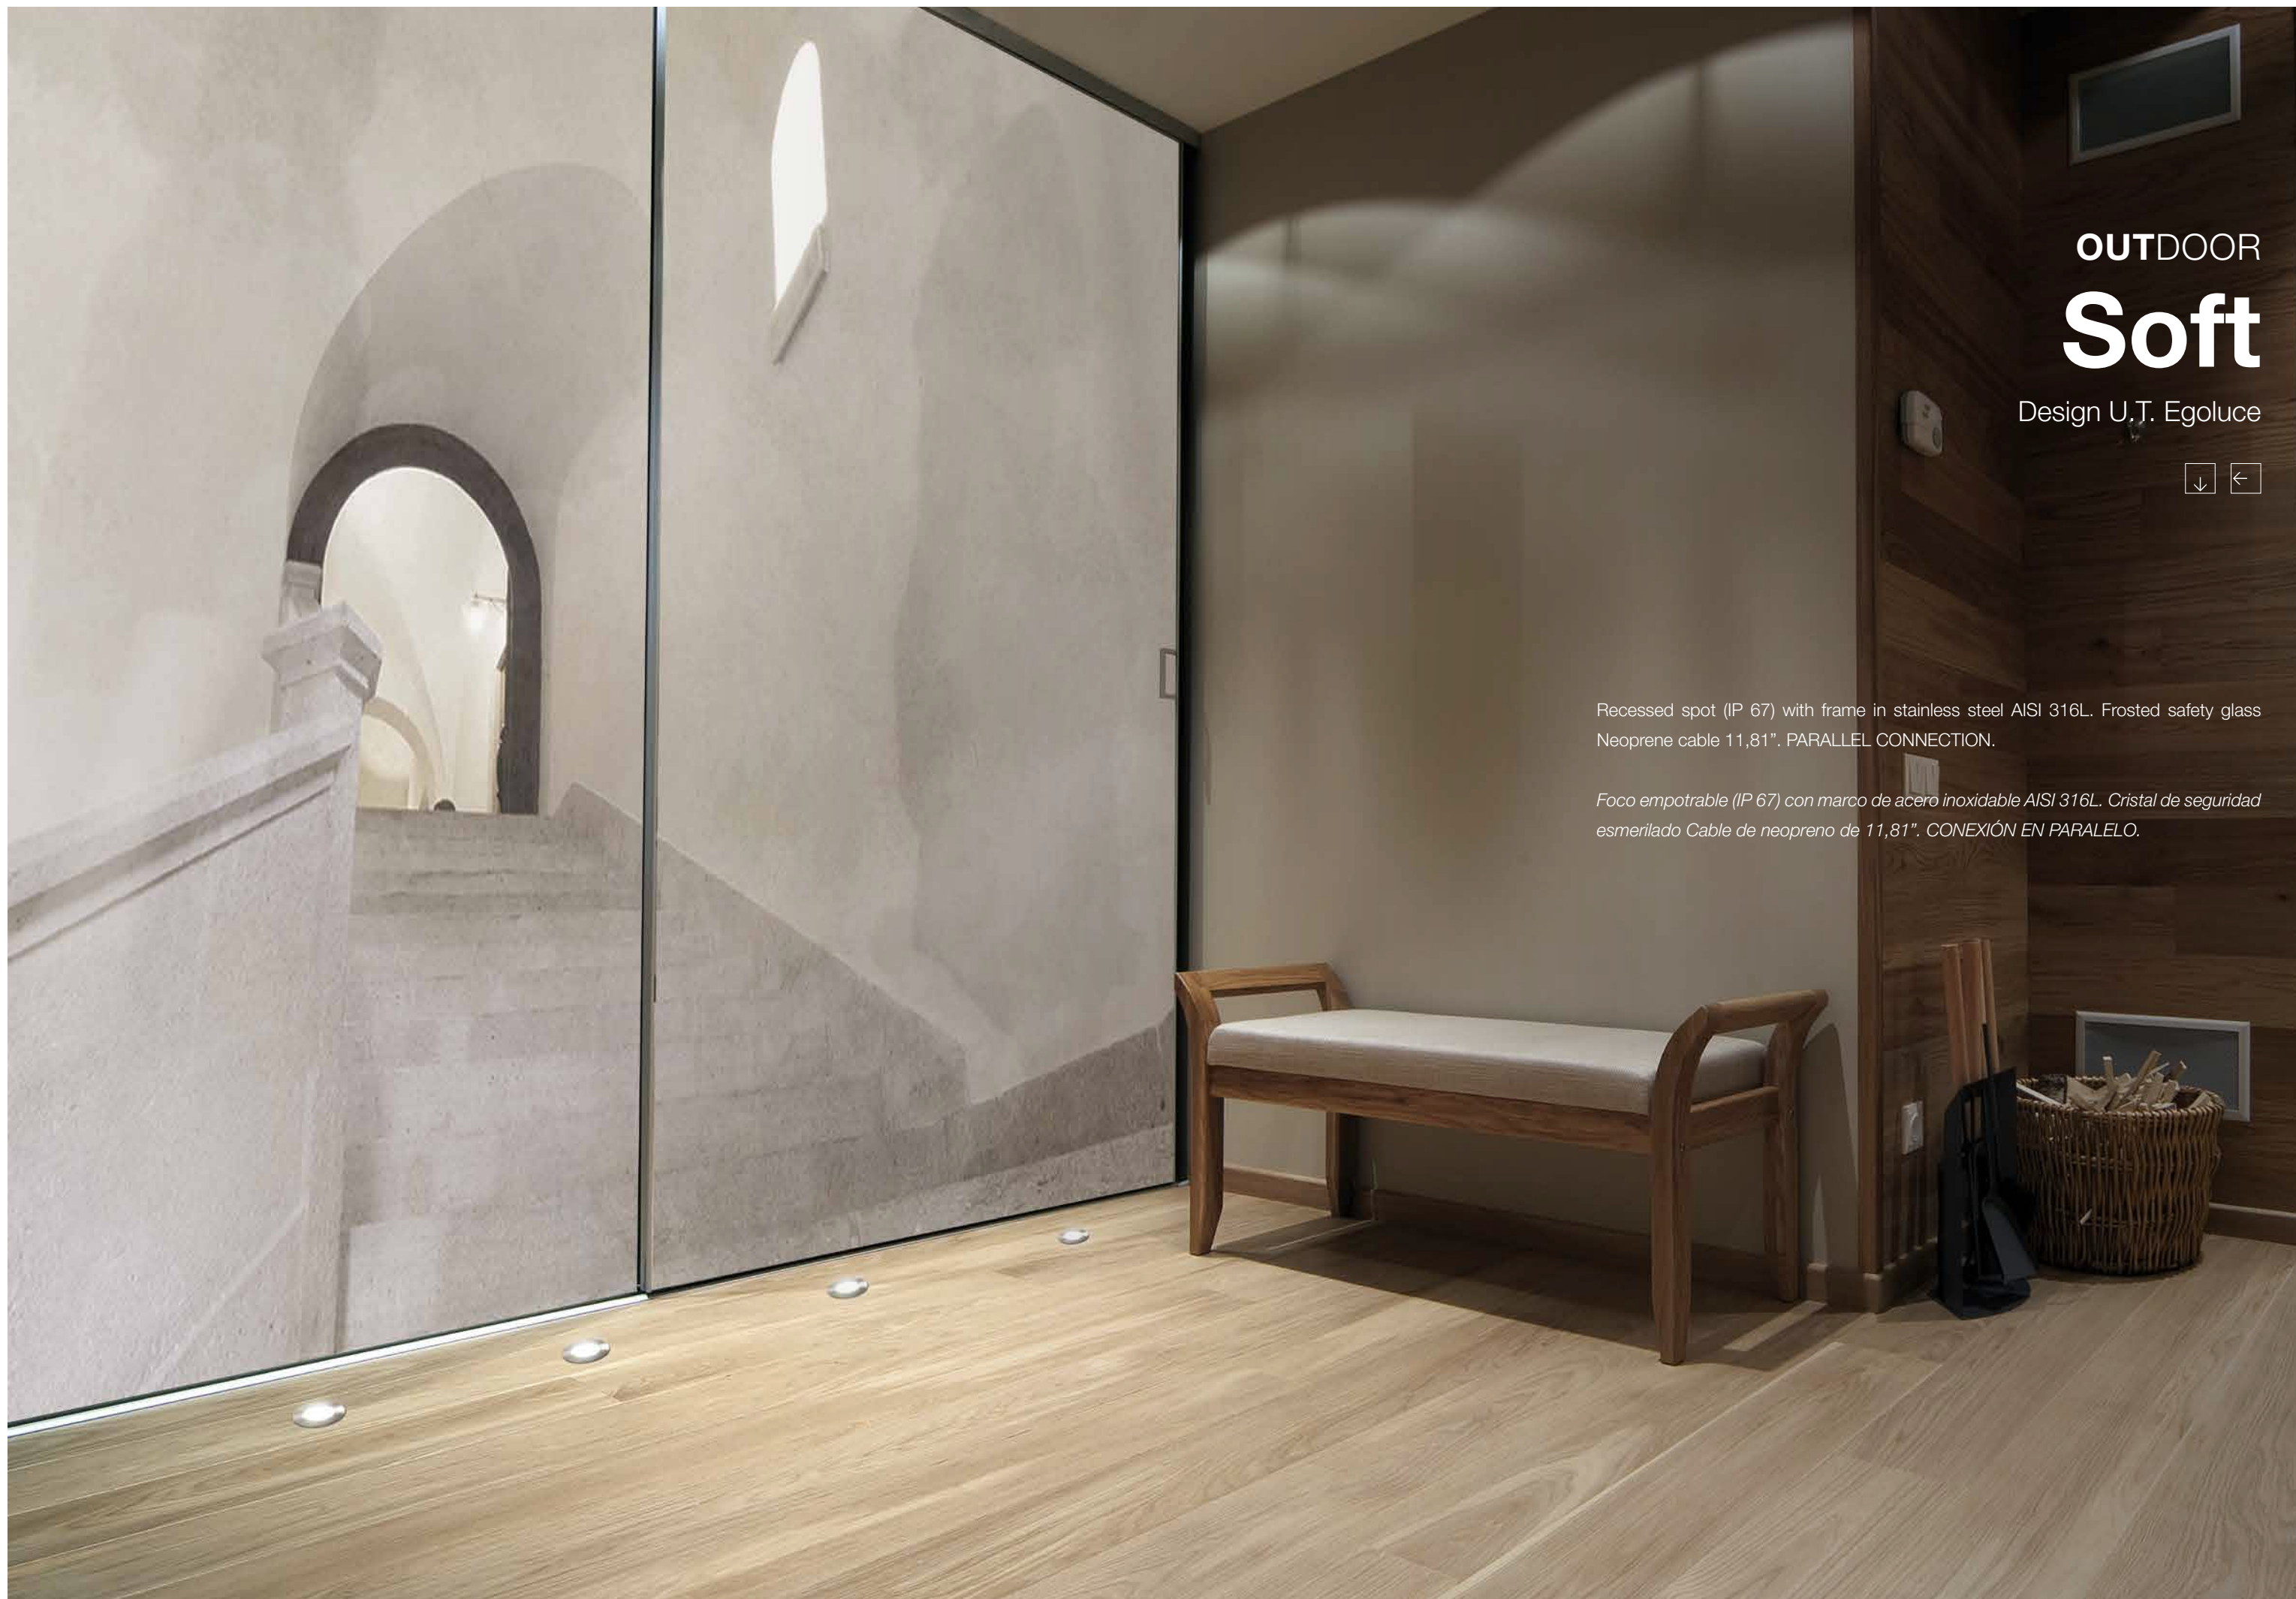

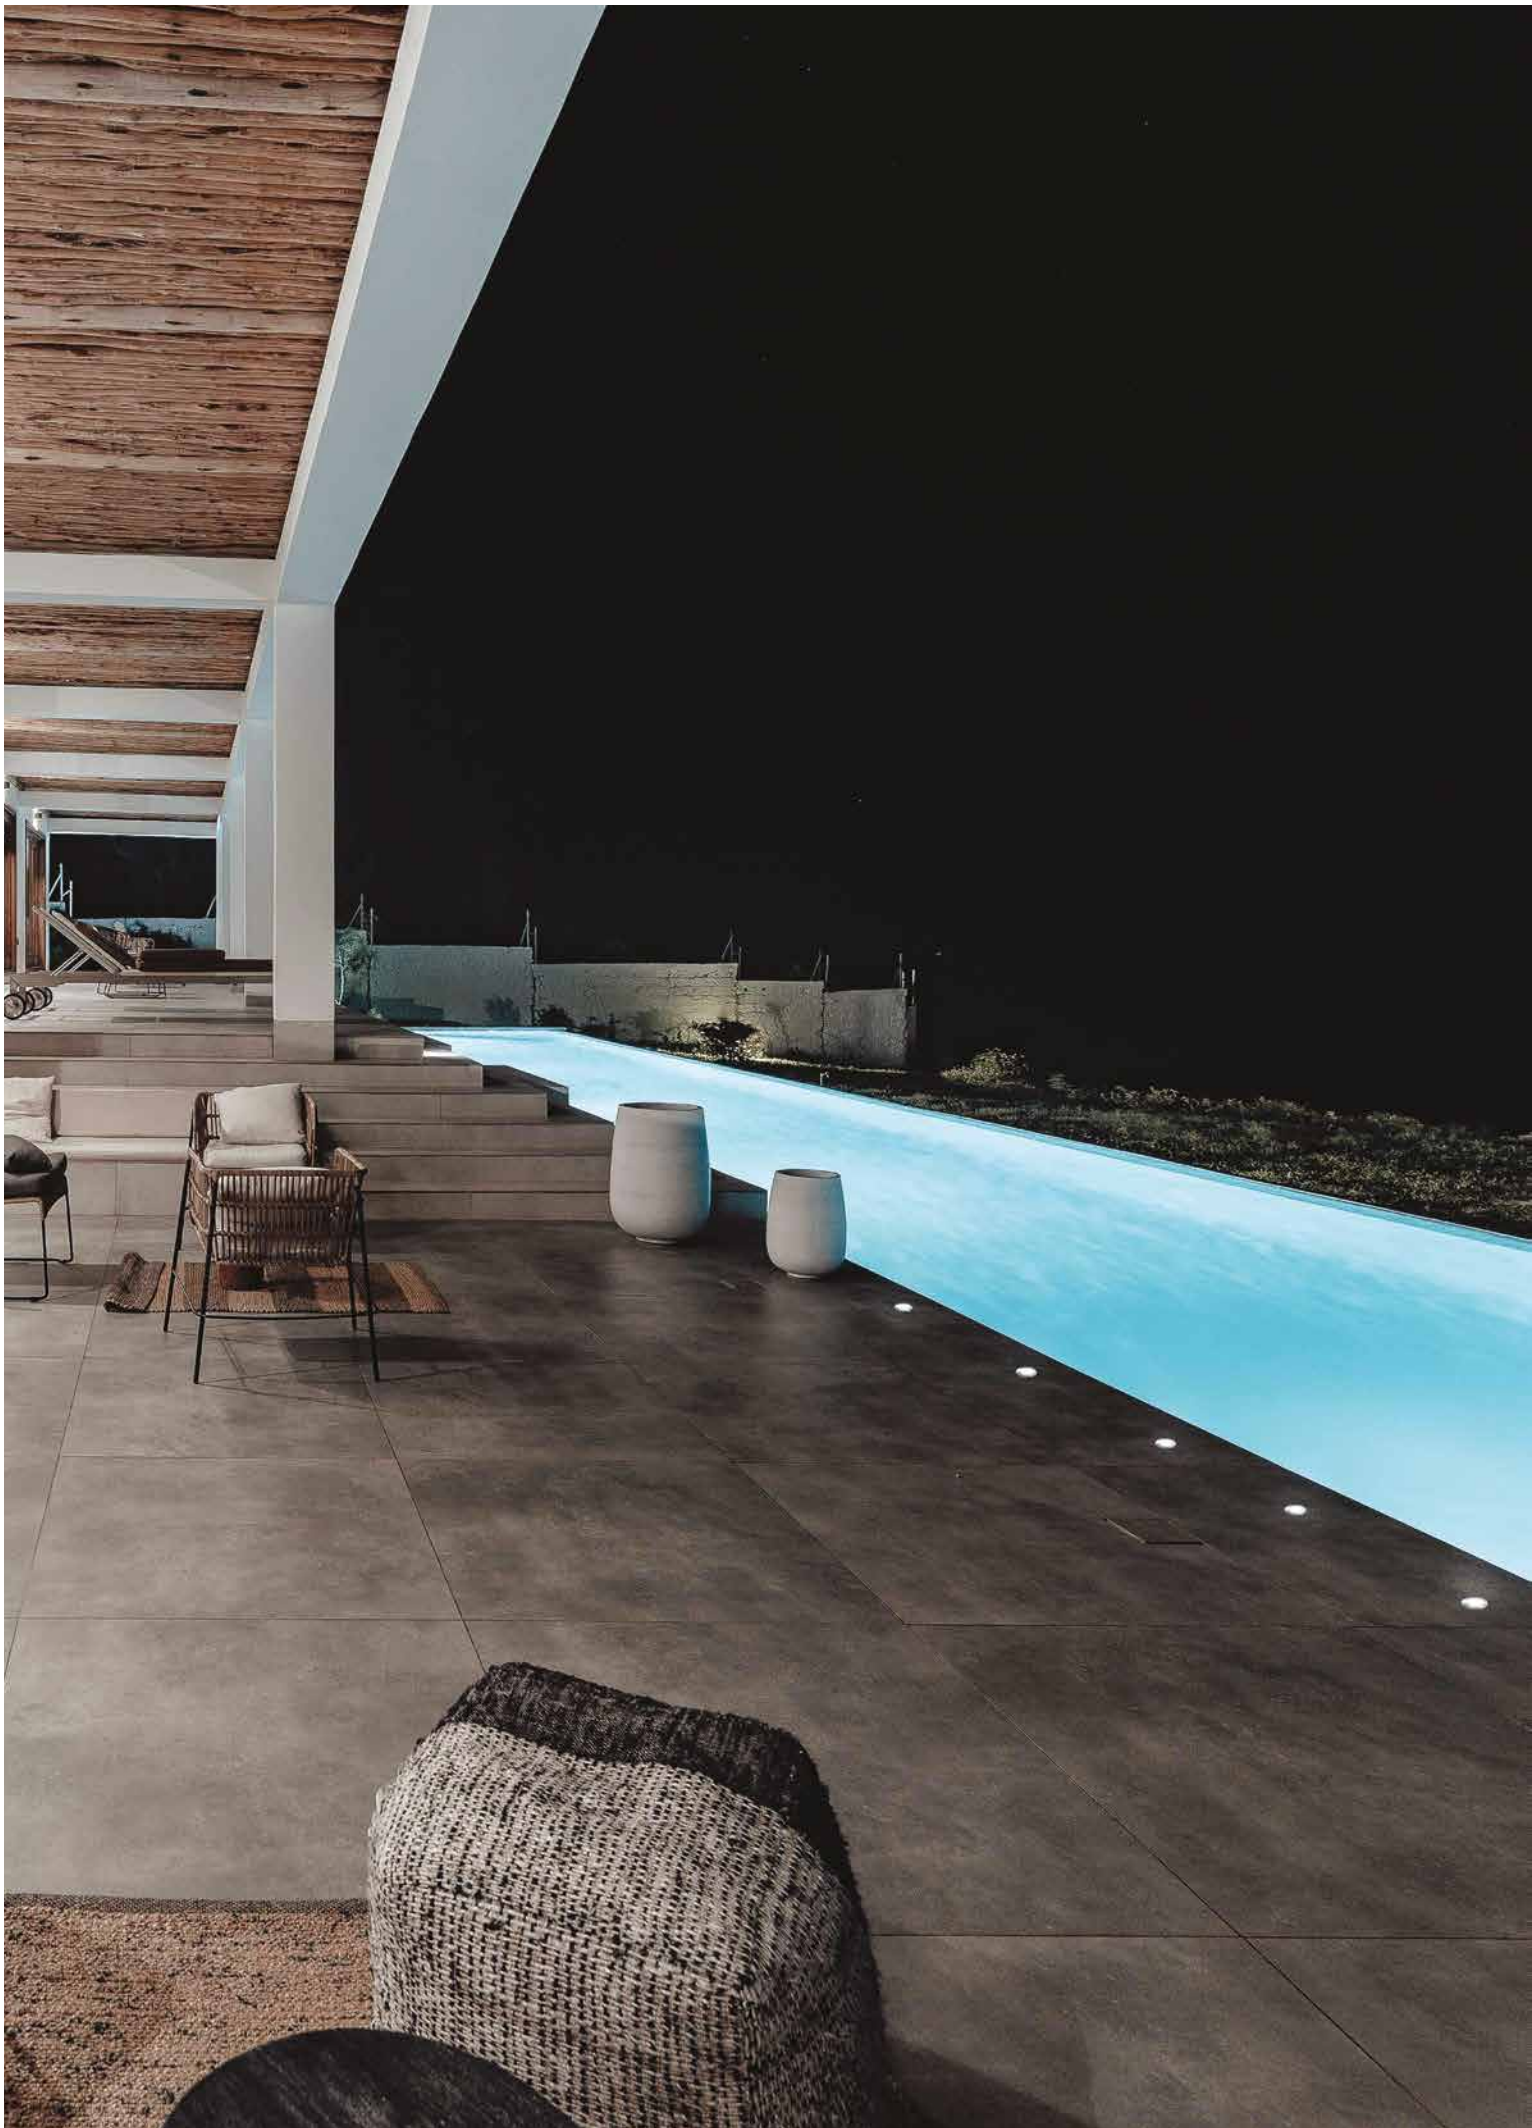

Soft

Design U.T. EGOLUCE

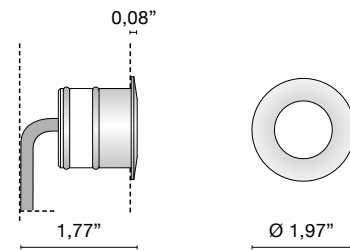

6388. _ _ / _ _ 0.24 lb

.33 ■ Stainless steel AISI 316L - *Acero cepillado*

/W 4000K LED 1,5W 12V 45lm

/WW 3000K LED 1,5W 12V 45lm



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0217



Kit draining junction box + IP68
connector
*Kit de encofrado de drenaje +
conector IP68*

0250

DRIVERS CONDUCTORES

0129 Multi-power dimmable driver - 1-6 Soft

0129/DALI Multi-power DALI dimmable driver - 1-6 Soft

0159 Power supply 12V - 25W - 1-15 Soft

Only parallel connection - *Solo conexión paralelo*

OUTDOOR
Cerchio

Design U.T. EgoLucé




Walkable recessed spot (IP 67) with frame in stainless steel AISI 316L and aluminum heat sink. Neoprene cable 11,81" montable with or without a recessed box.

Proyector empotrable transitable (IP 67) con marco de acero inoxidable AISI 316L y disipador de calor de aluminio. Cable de neopreno de 11,81" montable con o sin caja empotrada.



Cerchio

Design U.T. EGOLUCE

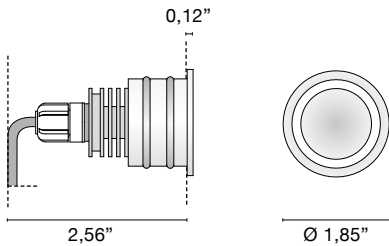

6389_ _ / _ _ 0.44 lb

.33 ■ Stainless steel AISI 316L - *Acero cepillado*

/W	4000K	LED max 2W 500mA	209lm
/WW	3000K	LED max 2W 500mA	199lm
/XW	2700K	LED max 2W 500mA	189lm



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0217



Kit draining junction box + IP68 connector
Kit de encofrado de drenaje + conector IP68

0250

DRIVERS CONDUCTORES




0127	Drivers 500 mA - 1-6 Cerchio
0128	Drivers 350 mA - 1-10 Cerchio
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-11 Cerchio

0141/DALI	Multi-power DALI dimmable driver - 1-11 Cerchio
0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Cerchio
0145/DALI	Multi-power DALI dimmable driver - 1-21 Cerchio

Only serial connection - *Solo conexión serie*

Cerchio

Design U.T. EGOLUCE

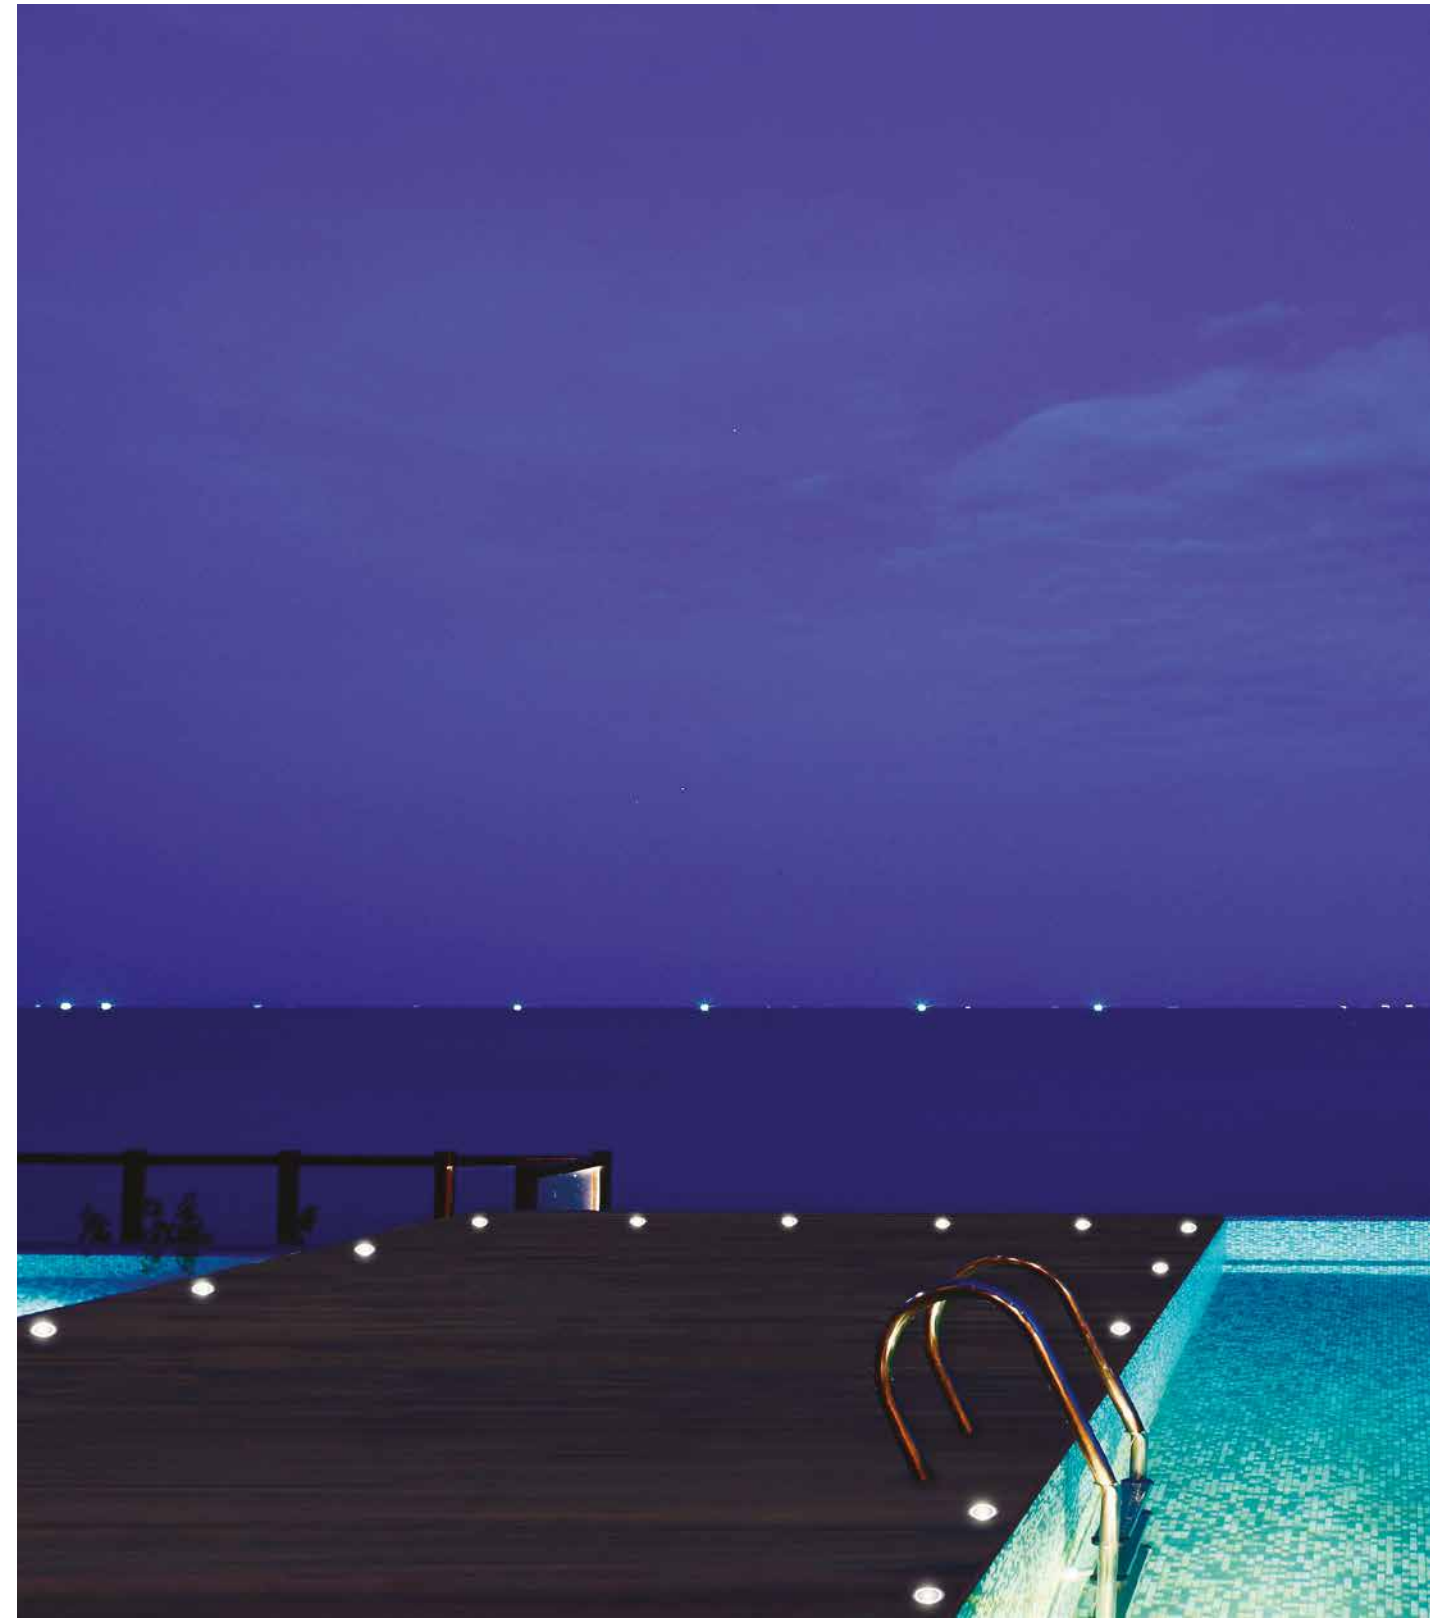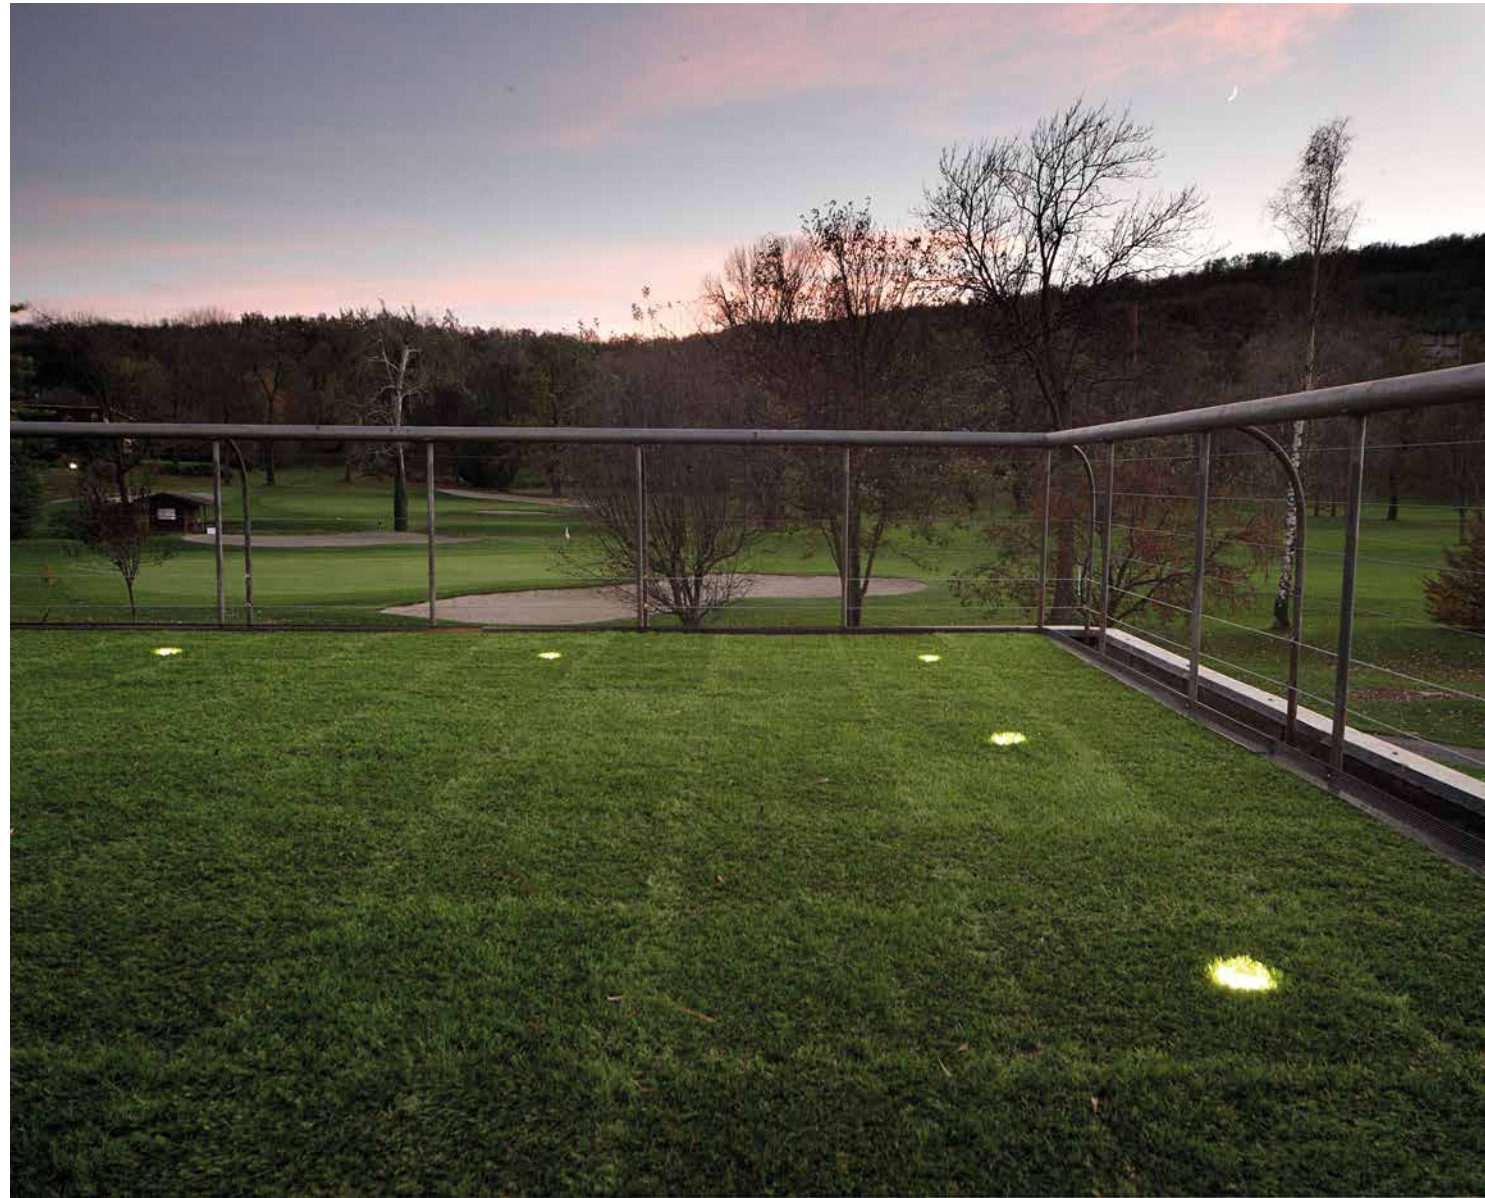



OUTDOOR
Vision

Design U.T. Egoluce




Series of adjustable outdoor projectors in anodized aluminum (reinforced anodizing for outdoor) with bracket in stainless steel AISI 316L. Supplied with neoprene cable. To be installed on tile, pavements, walls, ceiling, or temporary positioning on soft grounds.

Serie de proyectores orientables para exterior de aluminio anodizado (anodizado reforzado para exterior) con soporte de acero inoxidable AISI 316L. Se suministra con cable de neopreno. Para instalar sobre baldosas, pavimentos, paredes, techos, o para colocar temporalmente sobre suelo blando.



Vision 1

Design U.T. EGOLUCE

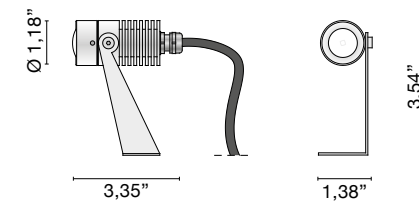

4510. _ / _ / _ / _ 0.66 lb

- .06 ■ Green - Verde
- .39 ■ Painted Anthracite finishing - Pintado antracita
- .45 ■ Aluminium anodized - Aluminio anodizado

	Optic degree					
/W	/11	/25	/45	LED max 2W 500mA	209lm	4000K
/WW	/11	/25	/45	LED max 2W 500mA	199lm	3000K
/XW	/11	/25	/45	LED max 2W 500mA	189lm	2700K



ACCESSORIES ACCESORIOS



Stake
Clavija

0247



IP68 Connector for cables
Conector IP68 para cables

0243

DRIVERS CONDUCTORES


- 0127 Drivers 500 mA - 1-6 Vision 1
- 0128 Drivers 350 mA - 1-10 Vision 1
- 0141/DIM Multi-power dimmable driver PUSH - 1...10V 500 mA - 2-8 Vision 1

- 0141/DALI Multi-power DALI dimmable driver 500 mA - 2-8 Vision 1
- 0145 Multi-power dimmable driver 500 mA - 1-21 Vision 1
- 0145/DALI Multi-power DALI dimmable driver 500 mA - 1-21 Vision 1

Only serial connection - Solo conexión serie

Vision 3


Design U.T. EGOLUCE

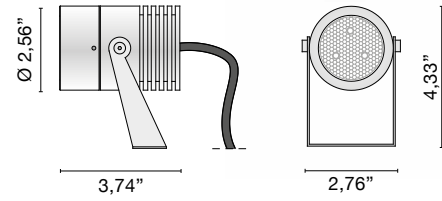

4511. _ / _ / _ 1.98 lb

- .06 ■ Green - Verde
- .39 ■ Painted Anthracite finishing - Pintado antracita
- .45 ■ Aluminium anodized - Aluminio anodizado

	Optic degree			
/W	/10	/25	LED (3x2)W 500mA	627lm 4000K
/WW	/10	/25	LED (3x2)W 500mA	597lm 3000K
/XW	/10	/25	LED (3x2)W 500mA	567lm 2700K

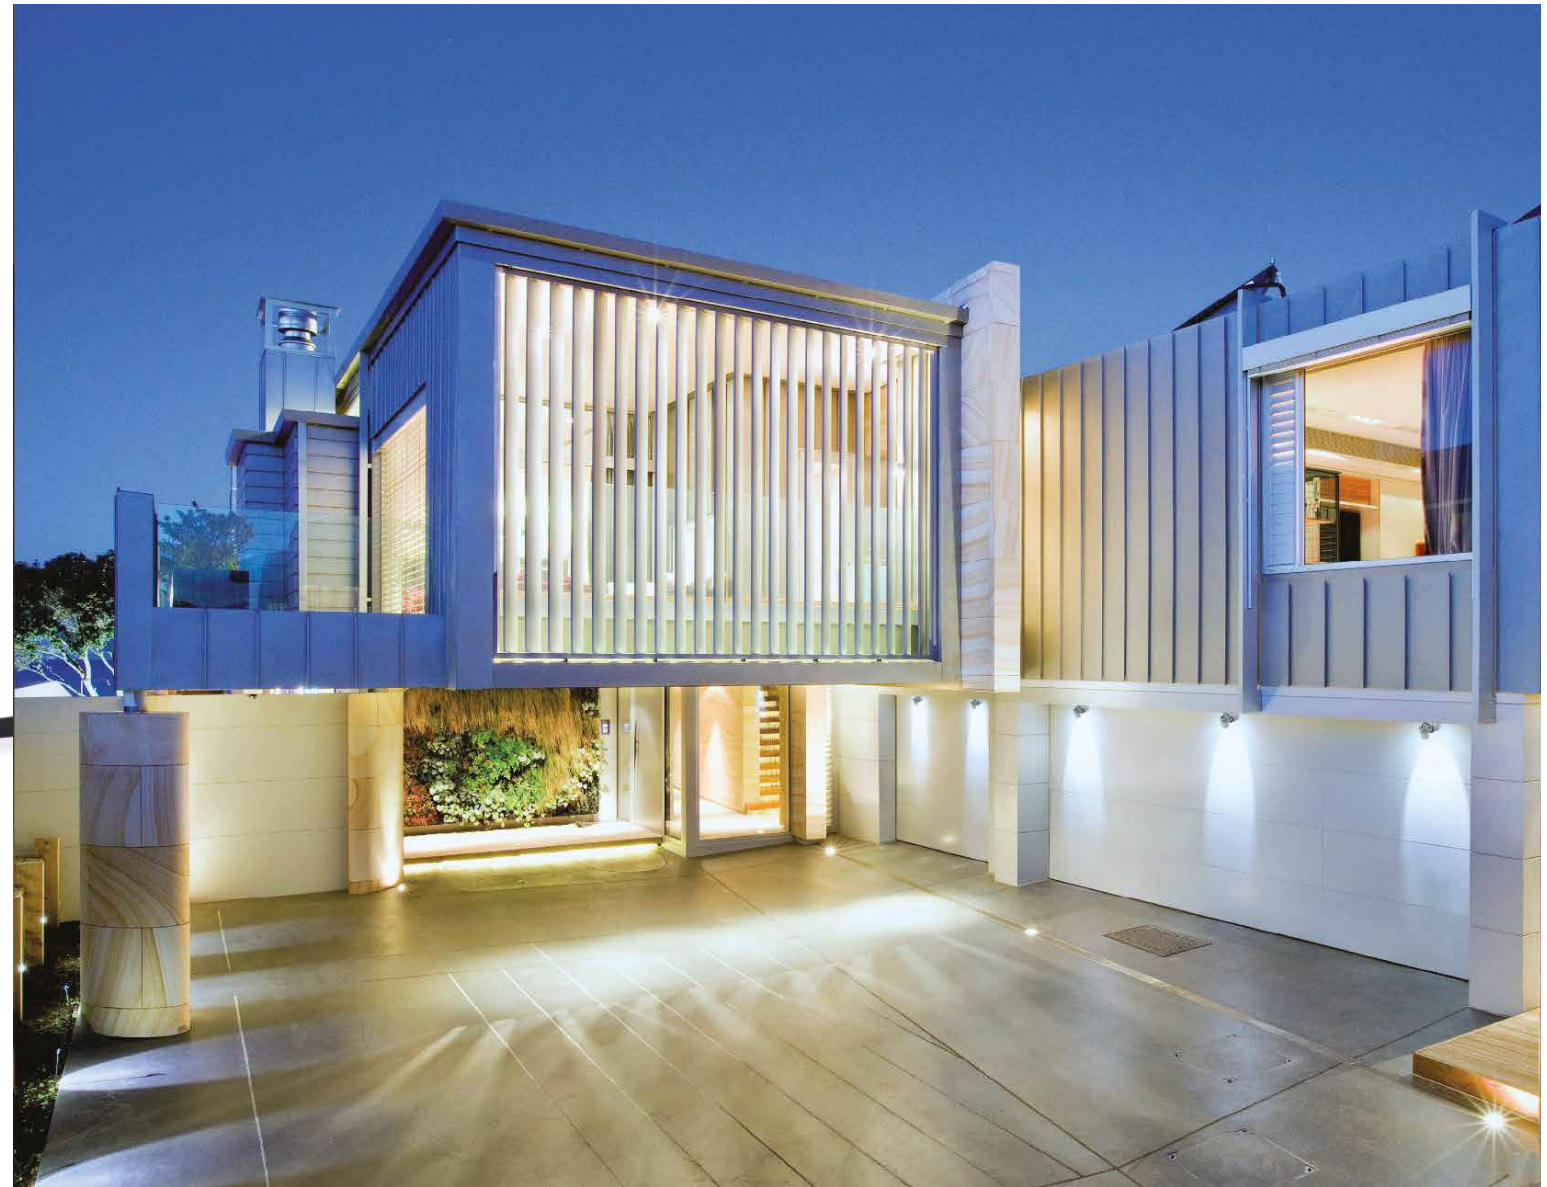

ACCESSORIES ACCESORIOS



Stake
Clavija para instalación temporal en el suelo

0248



IP68 Connector for cables
Conector IP68 para cables

0243

IP68

Only serial connection - Solo conexión serie

DRIVERS CONDUCTORES

- 0127 Drivers 500 mA - 1-2 Vision 3
- 0128 Drivers 350 mA - 1-3 Vision 3
- 0141/DIM Multi-power dimmable driver PUSH - 1...10V 500 mA - 1-2 Vision 3

- 0141/DALI Multi-power DALI dimmable driver 500 mA - 1-2 Vision 3
- 0145 Multi-power dimmable driver 500 mA - 1-7 Vision 3
- 0145/DALI Multi-power DALI dimmable driver 500 mA - 1-7 Vision 3



INDOOR

Top

Design U.T. EgoLuce





Recessed spotlight, white painted aluminium body, heat sink included. Ideal to light up small display cases. Mounting with or without junction box.

Foco empotrable, cuerpo de aluminio pintado en blanco, disipador de calor incluido. Ideal para iluminar pequeños escaparates. Montaje con o sin caja de conexiones.



Top

Design

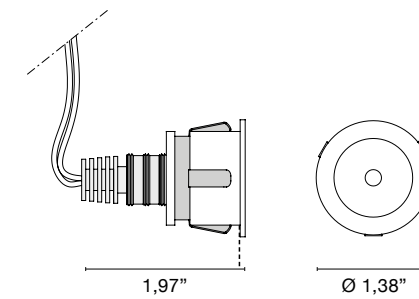

6363... / ... 0.09 lb

.01 ■ White - Blanco

/W	4000K	LED max 2W 500mA	209lm
/WW	3000K	LED max 2W 500mA	199lm
/XW	2700K	LED max 2W 500mA	189lm



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0216



Kit: box + perforated plaster
Kit: caja + yeso perforado


0213

DRIVERS CONDUCTORES

0127	Drivers 500 mA - 1-6 Top
0128	Drivers 350 mA - 1-10 Top
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-11 Top



0141/DALI	Multi-power DALI dimmable driver - 1-11 Top
0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Top
0145/DALI	Multi-power DALI dimmable driver - 1-21 Top

Only serial connection - Solo conexión serie

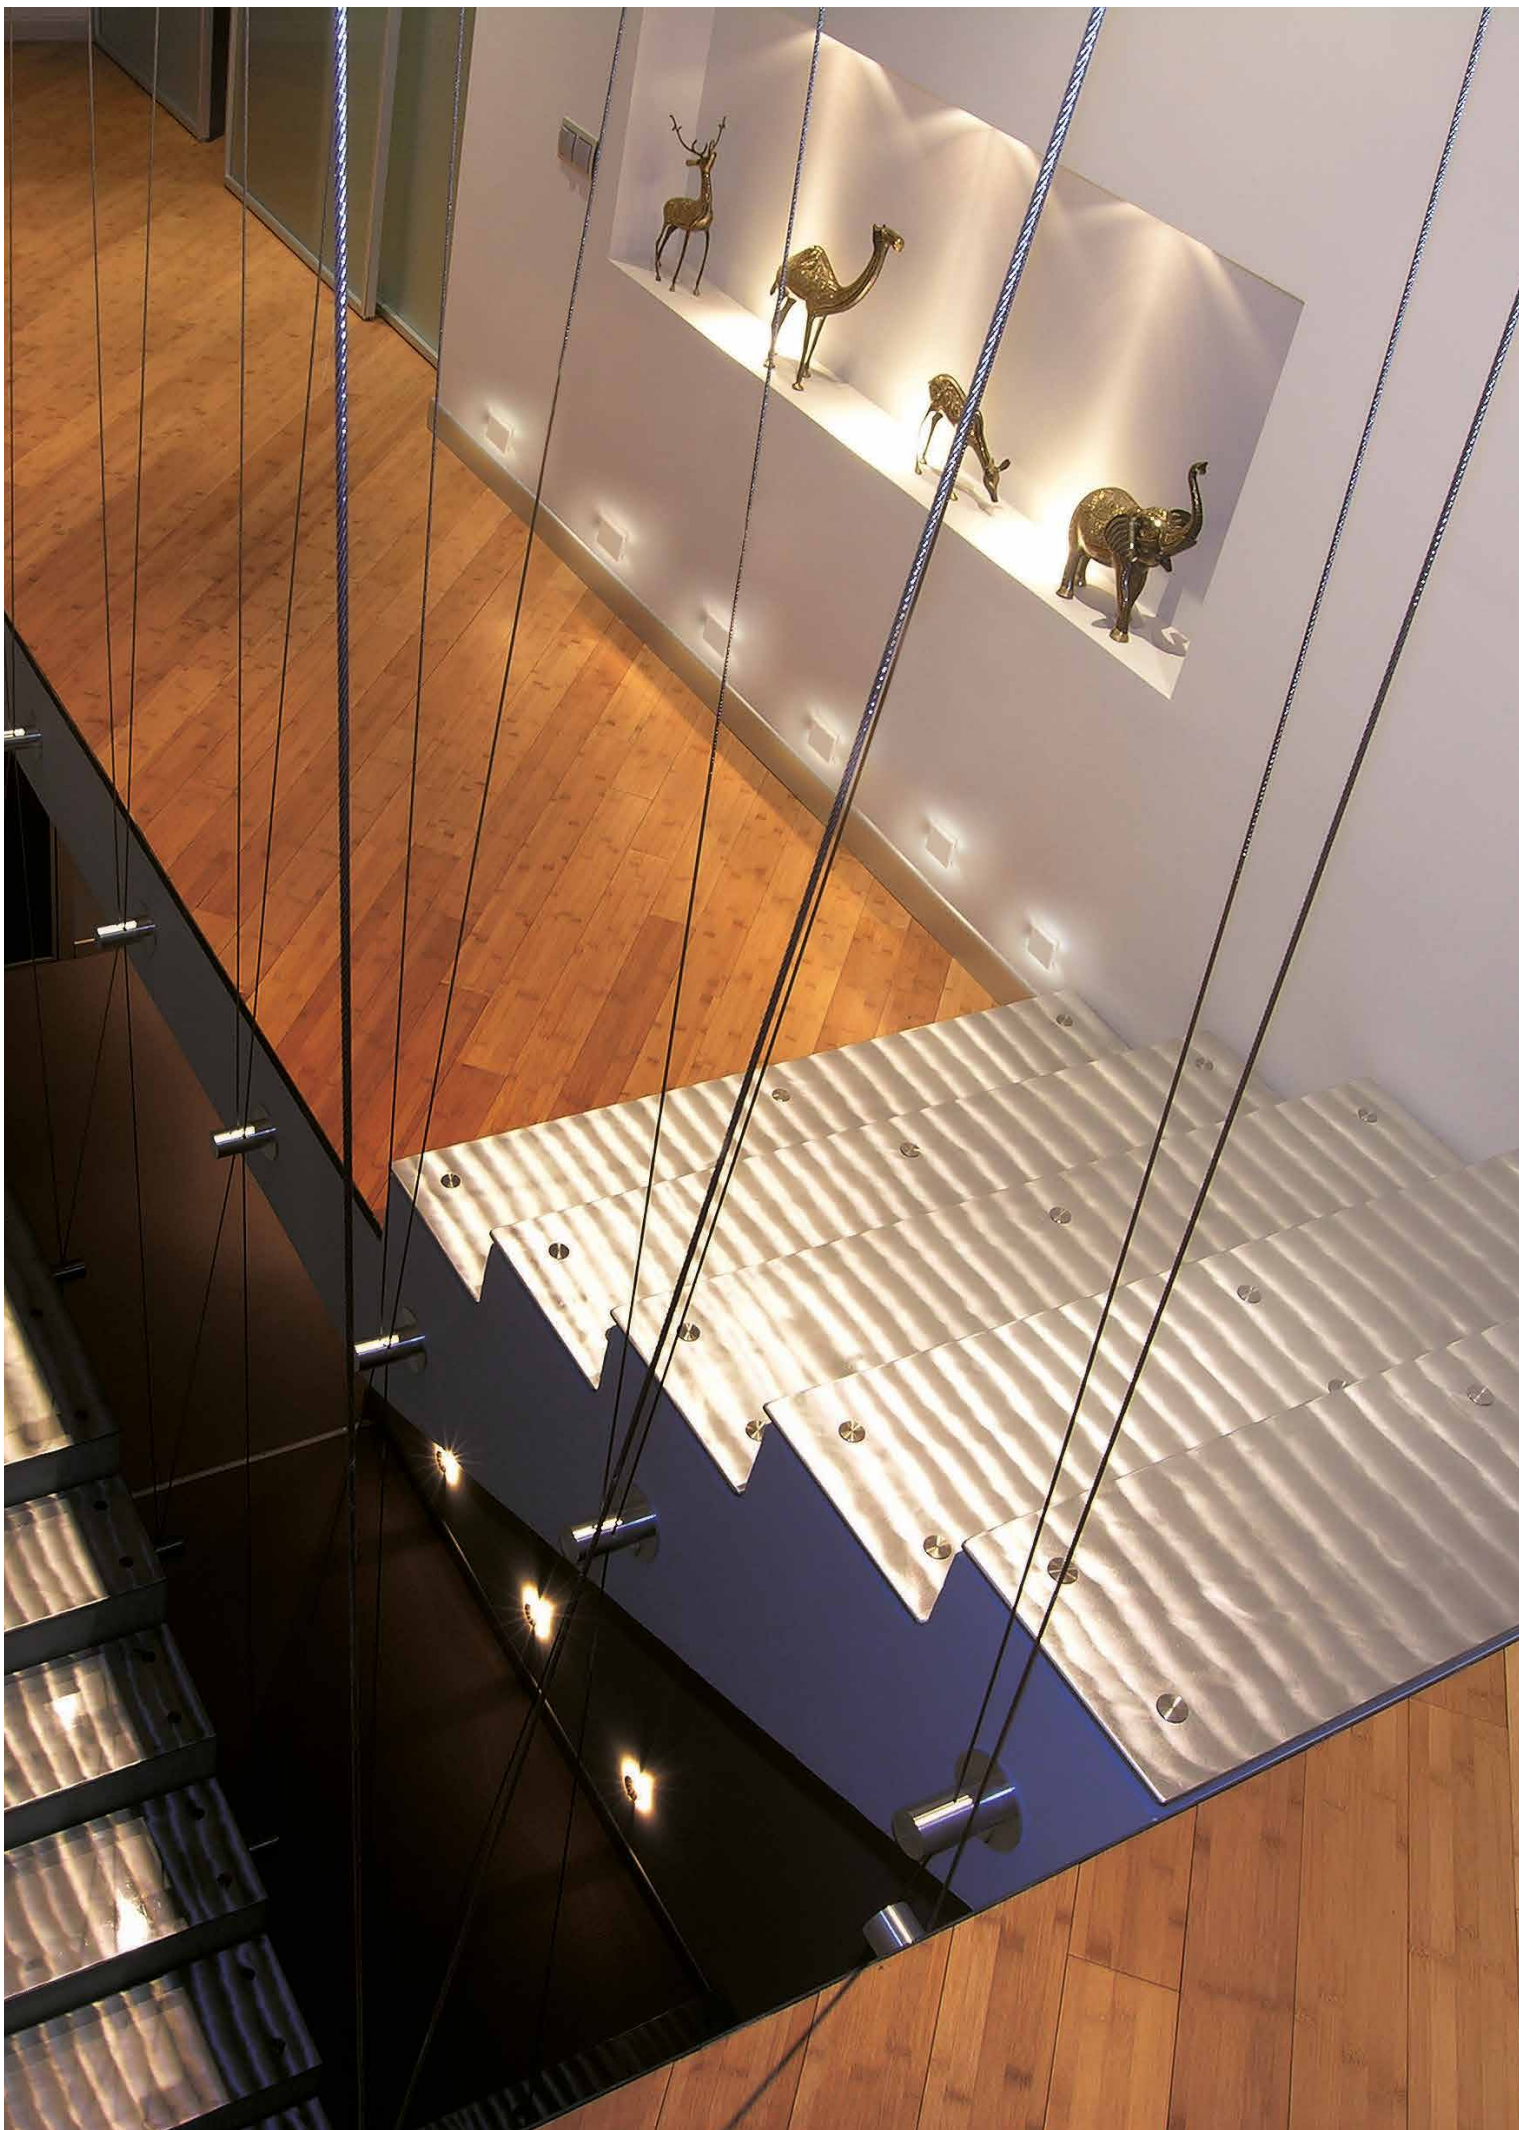

Top Mini

Design U.T. EGOLUCE

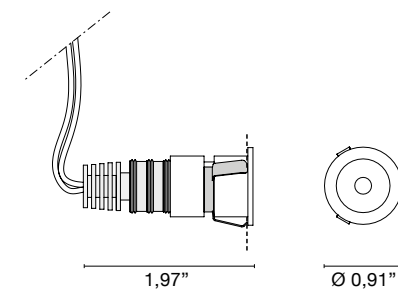

6364 / / 0.04 lb

.01 White - Blanco

/W	4000K	LED 1W 350mA	151lm
/WW	3000K	LED 1W 350mA	143lm
/XW	2700K	LED 1W 350mA	135lm




ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0215



Kit: box + perforated plaster
Kit: caja + yeso perforado


0212

DRIVERS CONDUCTORES

0127	Drivers 500 mA - 1-6 Top mini
0128	Drivers 350 mA - 1-10 Top mini
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-11 Top mini

0141/DALI	Multi-power DALI dimmable driver - 1-11 Top mini
0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Top mini
0145/DALI	Multi-power DALI dimmable driver - 1-21 Top mini


Only serial connection - Solo conexión serie



INDOOR

Dot

Design U.T. Egoluce





Recessed spotlight in white or nickel matt finish, heat sink included. Available in round or square version. Mounting with or without junction box or on metal false ceiling with adapter (art. 0208).

Foco empotrable en acabado blanco o níquel mate, disipador de calor incluido. Disponible en versión redonda o cuadrada. Montaje con o sin caja de empalmes o en techo metálico con adaptador (art. 0208).



Dot


Design U.T. EGOLUCE

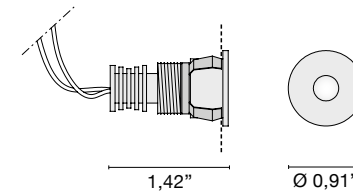

6320. / / 0.04 lb

- .01** ■ White - Blanco
- .32** ■ Nickel mat - Níquel satinado

/W	4000K	LED 1W 350mA	151lm
/WW	3000K	LED 1W 350mA	143lm
/XW	2700K	LED 1W 350mA	138lm

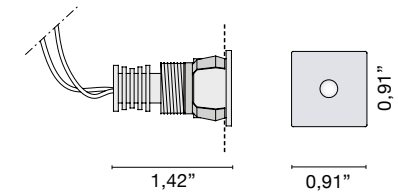

6321. / / 0.04 lb

- .01** ■ White - Blanco
- .32** ■ Nickel mat - Níquel satinado

/W	4000K	LED 1W 350mA	151lm
/WW	3000K	LED 1W 350mA	143lm
/XW	2700K	LED 1W 350mA	138lm



ACCESSORIES ACCESORIOS



0208
Adapter for slats
Adaptador de duelas



0215
Plastic Box
Caja de plástico




0212
Kit: box + perforated plaster
Kit: caja + yeso perforado

DRIVERS CONDUCTORES

0128	Drivers 350 mA - 1-10 Dot
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-12 Dot
0141/DALI	Multi-power DALI dimmable driver - 1-12 Dot

0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Dot
0145/DALI	Multi-power DALI dimmable driver - 1-21 Dot


Only serial connection - Solo conexión serie

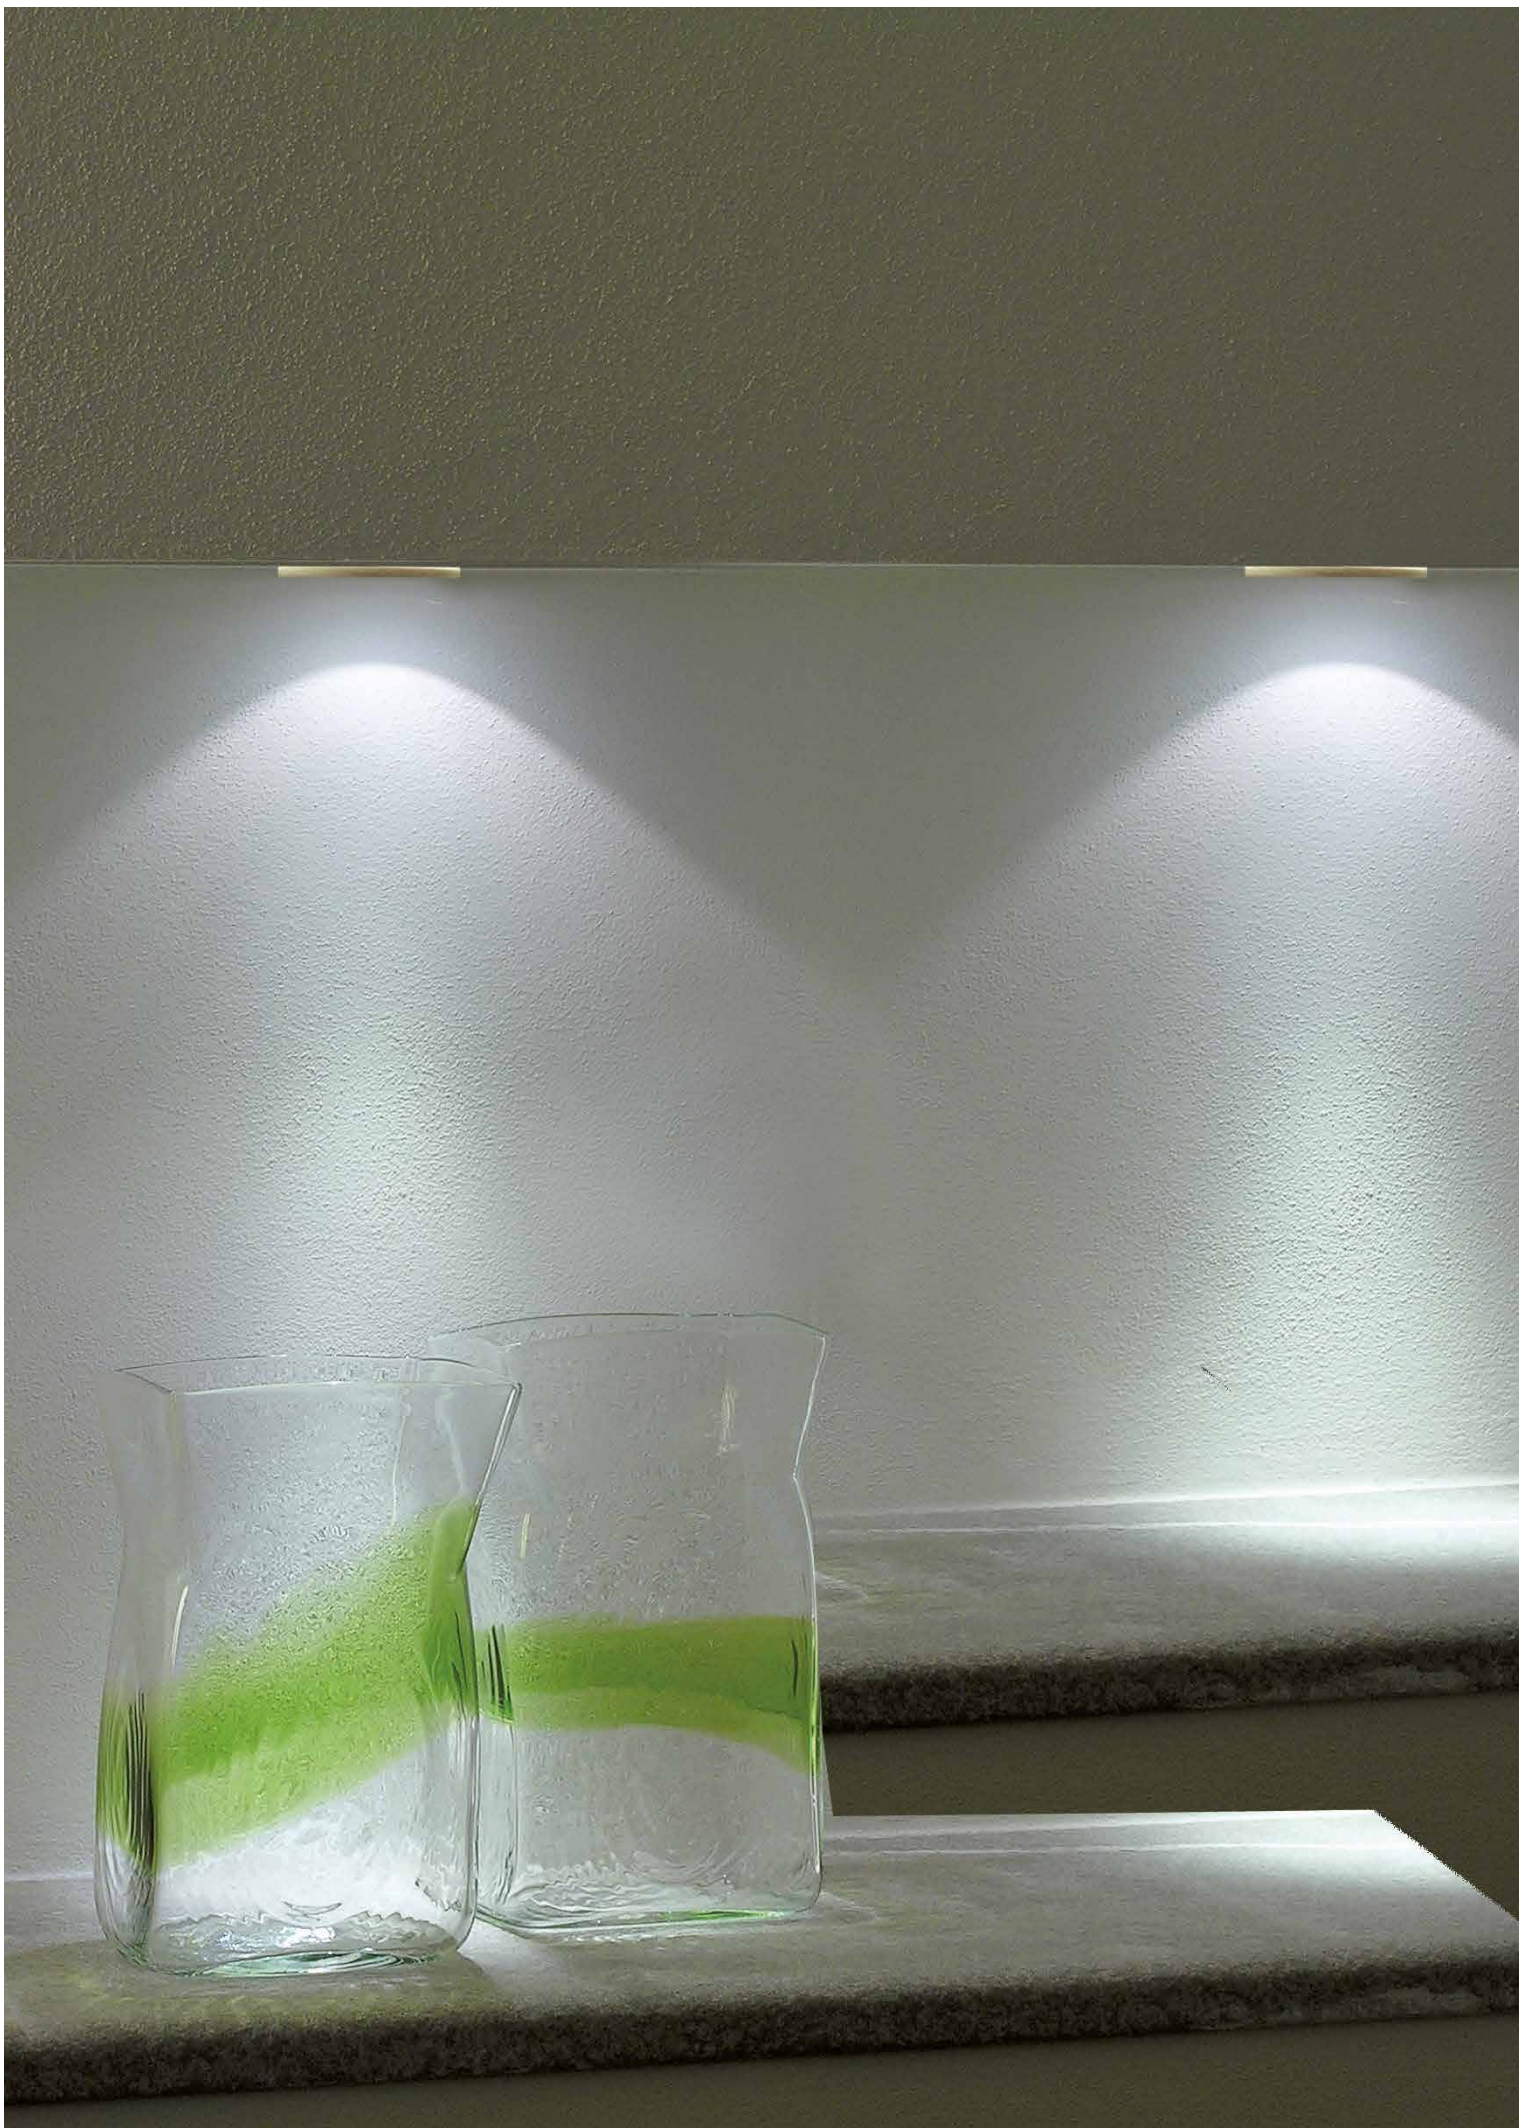

INDOOR

Pix

Design U.T. EgoLucé





Recessed spotlight in nickel matt finish or white painted. Heatsink included. it is available in round or square version. Installation with or without junction box and on metal false ceiling with adapter (art.0209).

Foco empotrable en acabado níquel mate o pintado en blanco. Disipador de calor incluido. Disponible en versión redonda o cuadrada. Instalación con o sin caja de empalmes y en techo metálico con adaptador (art. 0209).



Pix


Design U.T. EGOLUCE

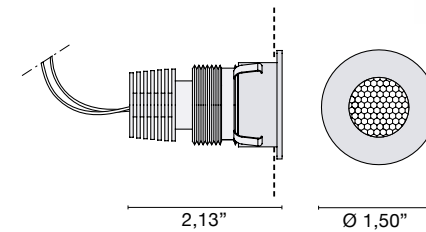

6322... / _ / _ / _ 0.13 lb

- .01** ■ White - Blanco
- .32** ■ Nickel mat - Niquel satinado

	Optic degree			
/W	/11	/25	/45	
LED max 2W 500mA	209lm	4000K		
/WW	/11	/25	/45	
LED max 2W 500mA	199lm	3000K		
/XW	/11	/25	/45	
LED max 2W 500mA	189lm	2700K		

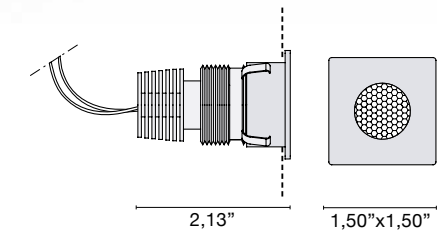

6323... / _ / _ / _ 0.13 lb

- .01** ■ White - Blanco
- .32** ■ Nickel mat - Niquel satinado

	Optic degree			
/W	/11	/25	/45	
LED max 2W 500mA	209lm	4000K		
/WW	/11	/25	/45	
LED max 2W 500mA	199lm	3000K		
/XW	/11	/25	/45	
LED max 2W 500mA	189lm	2700K		




ACCESSORIES ACCESORIOS



0209
Adapter for slats
Adaptador de duelas



0234
Plastic Box
Caja de plastico



0213
Kit: box + perforated plaster
Kit: caja + yeso perforado

DRIVERS CONDUCTORES


0127	Drivers 500 mA - 1-6 Pix
0128	Drivers 350 mA - 1-10 Pix
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-11 Pix

0141/DALI	Multi-power DALI dimmable driver - 1-11 Pix
0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Pix
0145/DALI	Multi-power DALI dimmable driver - 1-21 Pix

Only serial connection - Solo conexión serie

INDOOR
Sirio

Design U.T. EgoUCE





Recessed spotlight (IP 44) with clear cristal diffuser, frame in chromed aluminium. Heat sink included. Mounting with or without junction box.

Foco empotrable (IP 44) con difusor de cristal transparente, marco de aluminio cromado. Disipador de calor incluido. Montaje con o sin caja de conexiones.



Sirio

Design U.T. EGOLUCE

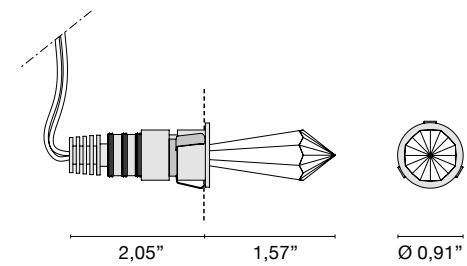

6359_ _ / _ _ 0.09 lb

.50 Crystal - Cristal

/W	4000K	LED 1W 350mA	151lm
/WW	3000K	LED 1W 350mA	143lm
/XW	2700K	LED 1W 350mA	132lm



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0215



Kit: box + perforated plaster
Kit: caja + yeso perforado

0212

DRIVERS CONDUCTORES

0128	Drivers 350 mA - 1-10 Sirio
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-12 Sirio
0141/DALI	Multi-power DALI dimmable driver - 1-12 Sirio

0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Sirio
0145/DALI	Multi-power DALI dimmable driver - 1-21 Sirio

Only serial connection - Solo conexión serie

INDOOR

Alcor

Design U.T. EgoIuce





Recessed spotlight (IP 44) with clear cristal diffuser, frame in chromed aluminium. Heat sink included. Mounting with or without junction box.

Foco empotrable (IP 44) con difusor de cristal transparente, marco de aluminio cromado. Disipador de calor incluido. Montaje con o sin caja de conexiones.



Alcor

Design U.T. EGOLUCE

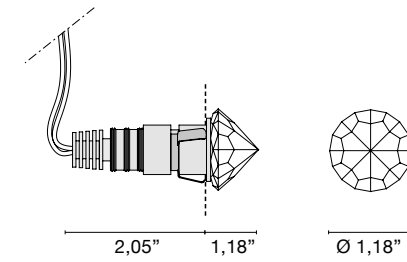

6360 _ _ / _ _ 0.07 lb

.50 ■ Crystal - *Cristal*

/W	4000K	LED 1W 350mA	151lm
/WW	3000K	LED 1W 350mA	143lm
/XW	2700K	LED 1W 350mA	132lm



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0215



Kit: box + perforated plaster
Kit: caja + yeso perforado

0212

DRIVERS CONDUCTORES

0128	Drivers 350 mA - 1-10 Alcor
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-12 Alcor
0141/DALI	Multi-power DALI dimmable driver - 1-12 Alcor

0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Alcor
0145/DALI	Multi-power DALI dimmable driver - 1-21 Alcor

Only serial connection - *Solo conexión serie*

INDOOR

Vega

Design U.T. EgoIuce





Recessed spotlight (IP 44) with clear cristal diffuser, frame in chromed aluminium. Heat sink included. Mounting with or without junction box.

Foco empotrable (IP 44) con difusor de cristal transparente, marco de aluminio cromado. Disipador de calor incluido. Montaje con o sin caja de conexiones.



Vega

Design U.T. EGOLUCE

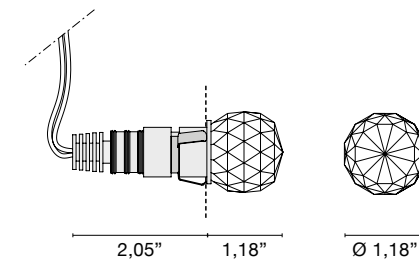

6358. _ _ / _ _ 0.13 lb

.50 Crystal - Cristal

/W	4000K	LED 1W 350mA	151lm
/WW	3000K	LED 1W 350mA	143lm
/XW	2700K	LED 1W 350mA	132lm



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0215



Kit: box + perforated plaster
Kit: caja + yeso perforado

0212

DRIVERS CONDUCTORES

0128	Drivers 350 mA - 1-10 V Vega
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 5-8 Vega
0141/DALI	Multi-power DALI dimmable driver - 4-8 Vega

0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Vega
0145/DALI	Multi-power DALI dimmable driver - 1-21 Vega

Only serial connection - Solo conexión serie

INDOOR

Fire

Design U.T. Egoluce




Recessed spotlight (IP 44). Transparent methacrylate diffuser with bubbles enclosure. Heat sink included. Mounting with or without junction box.

Foco empotrable (IP 44). Difusor de metacrilato transparente con plástico de burbujas. Disipador de calor incluido. Montaje con o sin caja de conexiones.



Fire

Design U.T. EGOLUCE

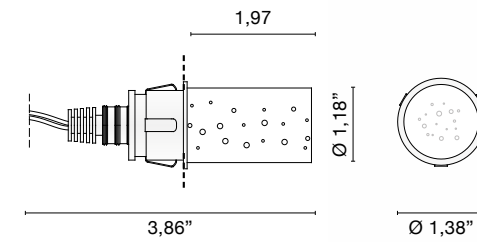

6340. _ _ / _ _ 0.18 lb

.00 Clear - *Transparente*

/W	4000K	LED 1W 350mA	151lm
/WW	3000K	LED 1W 350mA	143lm
/XW	2700K	LED 1W 350mA	138lm



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0216



Kit: box + perforated plaster
Kit: caja + yeso perforado

0213

DRIVERS CONDUCTORES

0128	Drivers 350 mA - 1-10 Fire
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-11 Fire
0141/DALI	Multi-power DALI dimmable driver - 1-11 Fire

0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Fire
0145/DALI	Multi-power DALI dimmable driver - 1-21 Fire


Only serial connection - *Solo conexión serie*



INDOOR


Ice

Design U.T. Ego luce






Recessed spotlight (IP44), frosted methacrylate diffuser. Heat sink included. Mounting with or without junction box.

Foco empotrable (IP44), difusor de metacrilato satinado. Disipador de calor incluido. Montaje con o sin caja de conexiones.

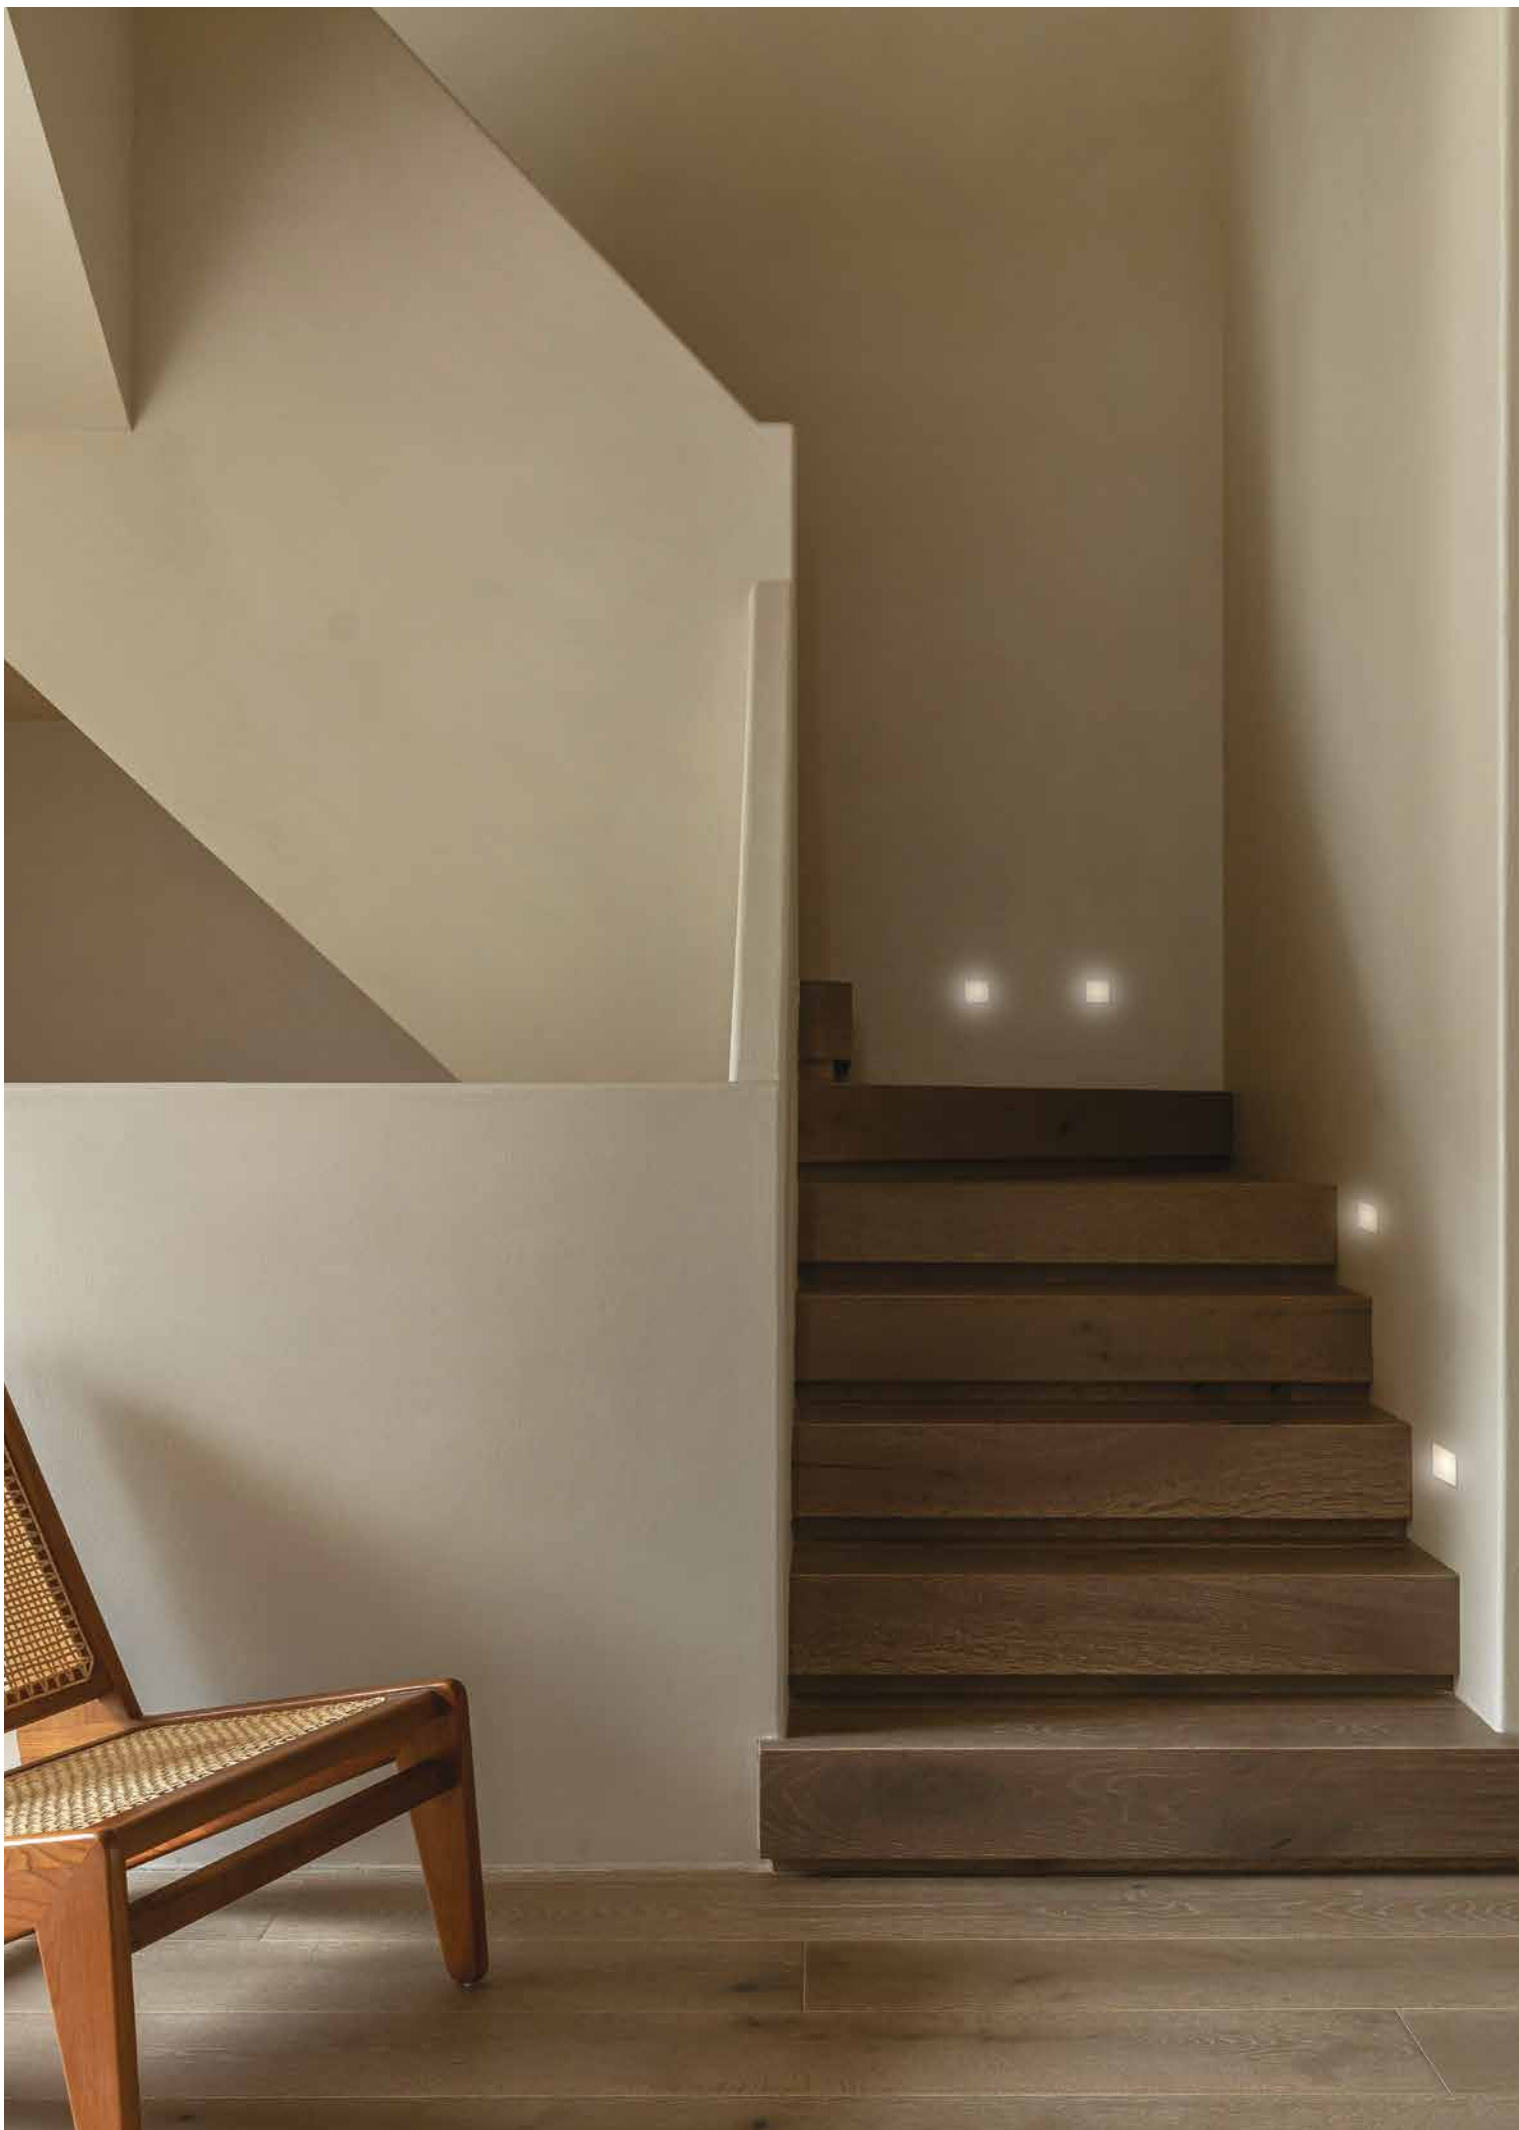

Ice

Design U.T. EGOLUCE

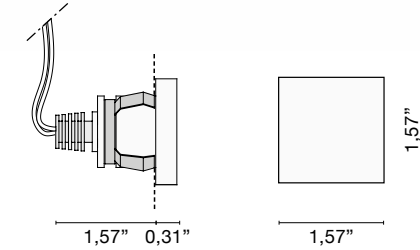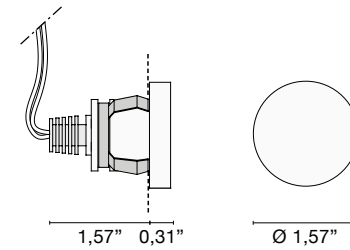

6354.__ / __ 0.11 lb

.01 White - Blanco

/W	4000K	LED 1W 350mA	151lm
/WW	3000K	LED 1W 350mA	143lm
/XW	2700K	LED 1W 350mA	132lm



6355.__ / __ 0.09 lb

.01 White - Blanco

/W	4000K	LED 1W 350mA	151lm
/WW	3000K	LED 1W 350mA	143lm
/XW	2700K	LED 1W 350mA	132lm




ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0216



Kit: box + perforated plaster
Kit: caja + yeso perforado

0213

DRIVERS CONDUCTORES

0128	Drivers 350 mA - 1-10 Ice
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-12 Ice
0141/DALI	Multi-power DALI dimmable driver - 1-12 Ice

0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Ice
0145/DALI	Multi-power DALI dimmable driver - 1-21 Ice

Only serial connection - Solo conexión serie

INDOOR

Snorky

Design U.T. EgoIuce




Adjustable recessed spotlight in chromed aluminium, heat sink included. The use of a latest generation Led enabled the creation of a small object with high performances. Installation with or without junction box.

Foco empotrable orientable de aluminio cromado, con disipador de calor incluido. El uso de un LED de última generación ha permitido crear un objeto de dimensiones reducidas pero con un alto rendimiento. Instalación con o sin caja de conexiones.



Snorky

Design U.T. EGOLUCE

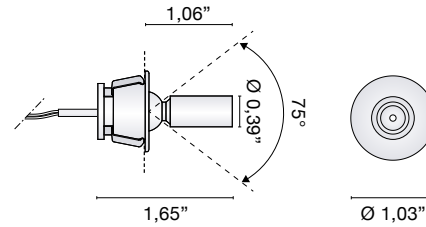

6373. _ _ / _ _ 0.04 lb

.31 ■ Chromed - Cromado

/W	4000K	LED 1W 350mA	151lm
/WW	3000K	LED 1W 350mA	143lm
/XW	2700K	LED 1W 350mA	132lm



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0215



Kit: box + perforated plaster
Kit: caja + yeso perforado

0212

DRIVERS CONDUCTORES

0128	Drivers 350 mA - 1-10 Snorky
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-12 Snorky
0141/DALI	Multi-power DALI dimmable driver - 1-12 Snorky

0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Snorky
0145/DALI	Multi-power DALI dimmable driver - 1-21 Snorky

Only serial connection - Solo conexión serie



INDOOR

Cerchietto

Design U.T. EgoLuce





Recessed spotlight (IP44), white painted aluminium body. Available with white or blue Led. Heat sink included. Mounting with or without junction box.

Foco empotrable (IP44), cuerpo de aluminio pintado en blanco. Disponible con LED blanco o azul. Disipador de calor incluido. Montaje con o sin caja de conexiones.



Cerchietto

Design U.T. EGOLUCE

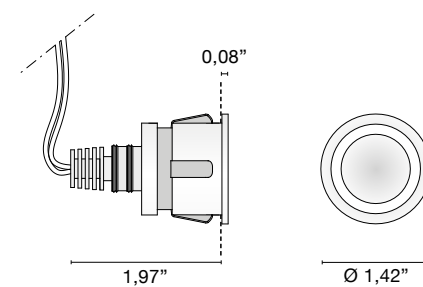

6391. _ _ / _ _ 0.09 lb

.01 ■ White - Blanco

/B LED 1W CRI>90 350mA

/W 4000K LED max 2W CRI>90 500mA 209lm

/WW 3000K LED max 2W CRI>90 500mA 199lm

/XW 2700K LED max 2W CRI>90 500mA 189lm



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0216



Kit: box + perforated plaster
Kit: caja + yeso perforado

0213

DRIVERS CONDUCTORES

0127 Drivers 500 mA - 1-6 Cerchietto

0128 Drivers 350 mA - 1-10 Cerchietto

0141/DIM Multi-power dimmable driver PUSH - 1...10V - 1-11 Cerchietto

0141/DALI Multi-power DALI dimmable driver - 1-11 Cerchietto

0145 Multi-power dimmable driver PUSH - 1...10V - 1-21 Cerchietto


0145/DALI Multi-power DALI dimmable driver - 1-21 Cerchietto

Only serial connection - Solo conexión serie

INDOOR

Cruise

Design U.T. EgoLucce




Recessed spotlight, white painted aluminium body. Heat sink included. Mounting with or without junction box.

Foco empotrable, cuerpo de aluminio pintado en blanco. Disipador de calor incluido. Montaje con o sin caja de conexiones.



Cruise

Design U.T. EGOLUCE

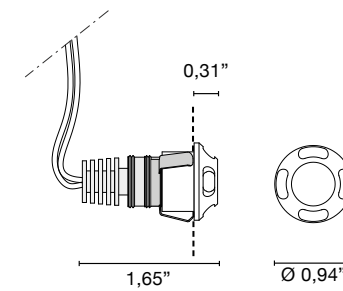

6382 / / 0.04 lb
.01 ■ White - Blanco

/B	LED 1W CRI>90	500mA	
/W	4000K	LED 1W CRI>90	500mA 151lm
/WW	3000K	LED 1W CRI>90	500mA 143lm
/XW	2700K	LED 1W CRI>90	500mA 135lm



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0215



Kit: box + perforated plaster
Kit: caja + yeso perforado

0212

DRIVERS CONDUCTORES

0128	Drivers 350 mA - 1-10 Cruise
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-12 Cruise
0141/DALI	Multi-power DALI dimmable driver - 1-12 Cruise

0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Cruise
0145/DALI	Multi-power DALI dimmable driver - 1-21 Cruise

Only serial connection - Solo conexión serie

INDOOR

Spoon

Design U.T. EgoLucé





Recessed spotlight for asymmetric emission. Aluminium frame in anodized or white finish. Heat sink included. Mounting with junction box.

Foco empotrado para emisión asimétrica. Estructura de aluminio anodizado o blanco. Disipador de calor incluido. Montaje con caja de conexiones.



Spoon

Design U.T. EGOLUCE

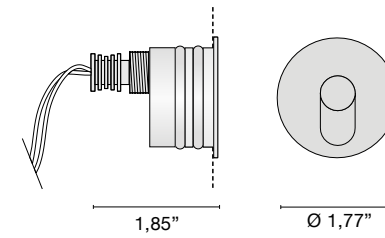


6350. / / 0.15 lb

.01 ■ White - Blanco

.45 ■ Aluminium anodized - Aluminio anodizado

/W	4000K	LED max 2W 500mA	209lm
/WW	3000K	LED max 2W 500mA	199lm
/XW	2700K	LED max 2W 500mA	189lm

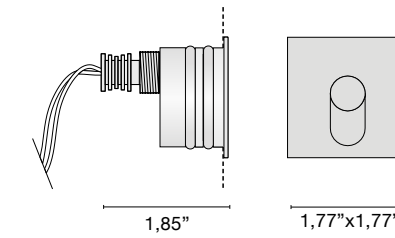

6351. / / 0.15 lb

.01 ■ White - Blanco

.45 ■ Aluminium anodized - Aluminio anodizado

/W	4000K	LED max 2W 500mA	209lm
/WW	3000K	LED max 2W 500mA	199lm
/XW	2700K	LED max 2W 500mA	189lm



ACCESSORIES ACCESORIOS



Plastic Box
Caja de plastico

0217



Kit: box + perforated plaster
Kit: caja + yeso perforado

0214

DRIVERS CONDUCTORES

0127 Drivers 500 mA - 1-6 Spoon tondo

0128 Drivers 350 mA - 1-10 Spoon tondo

0141/DIM Multi-power dimmable driver PUSH - 1...10V - 1-11 Spoon

0141/DALI Multi-power DALI dimmable driver - 1-11 Spoon




0145 Multi-power dimmable driver PUSH - 1...10V - 1-21 Spoon

0145/DALI Multi-power DALI dimmable driver - 1-21 Spoon

Only serial connection - Solo conexión serie

Spoon

Design U.T. EgoLucce

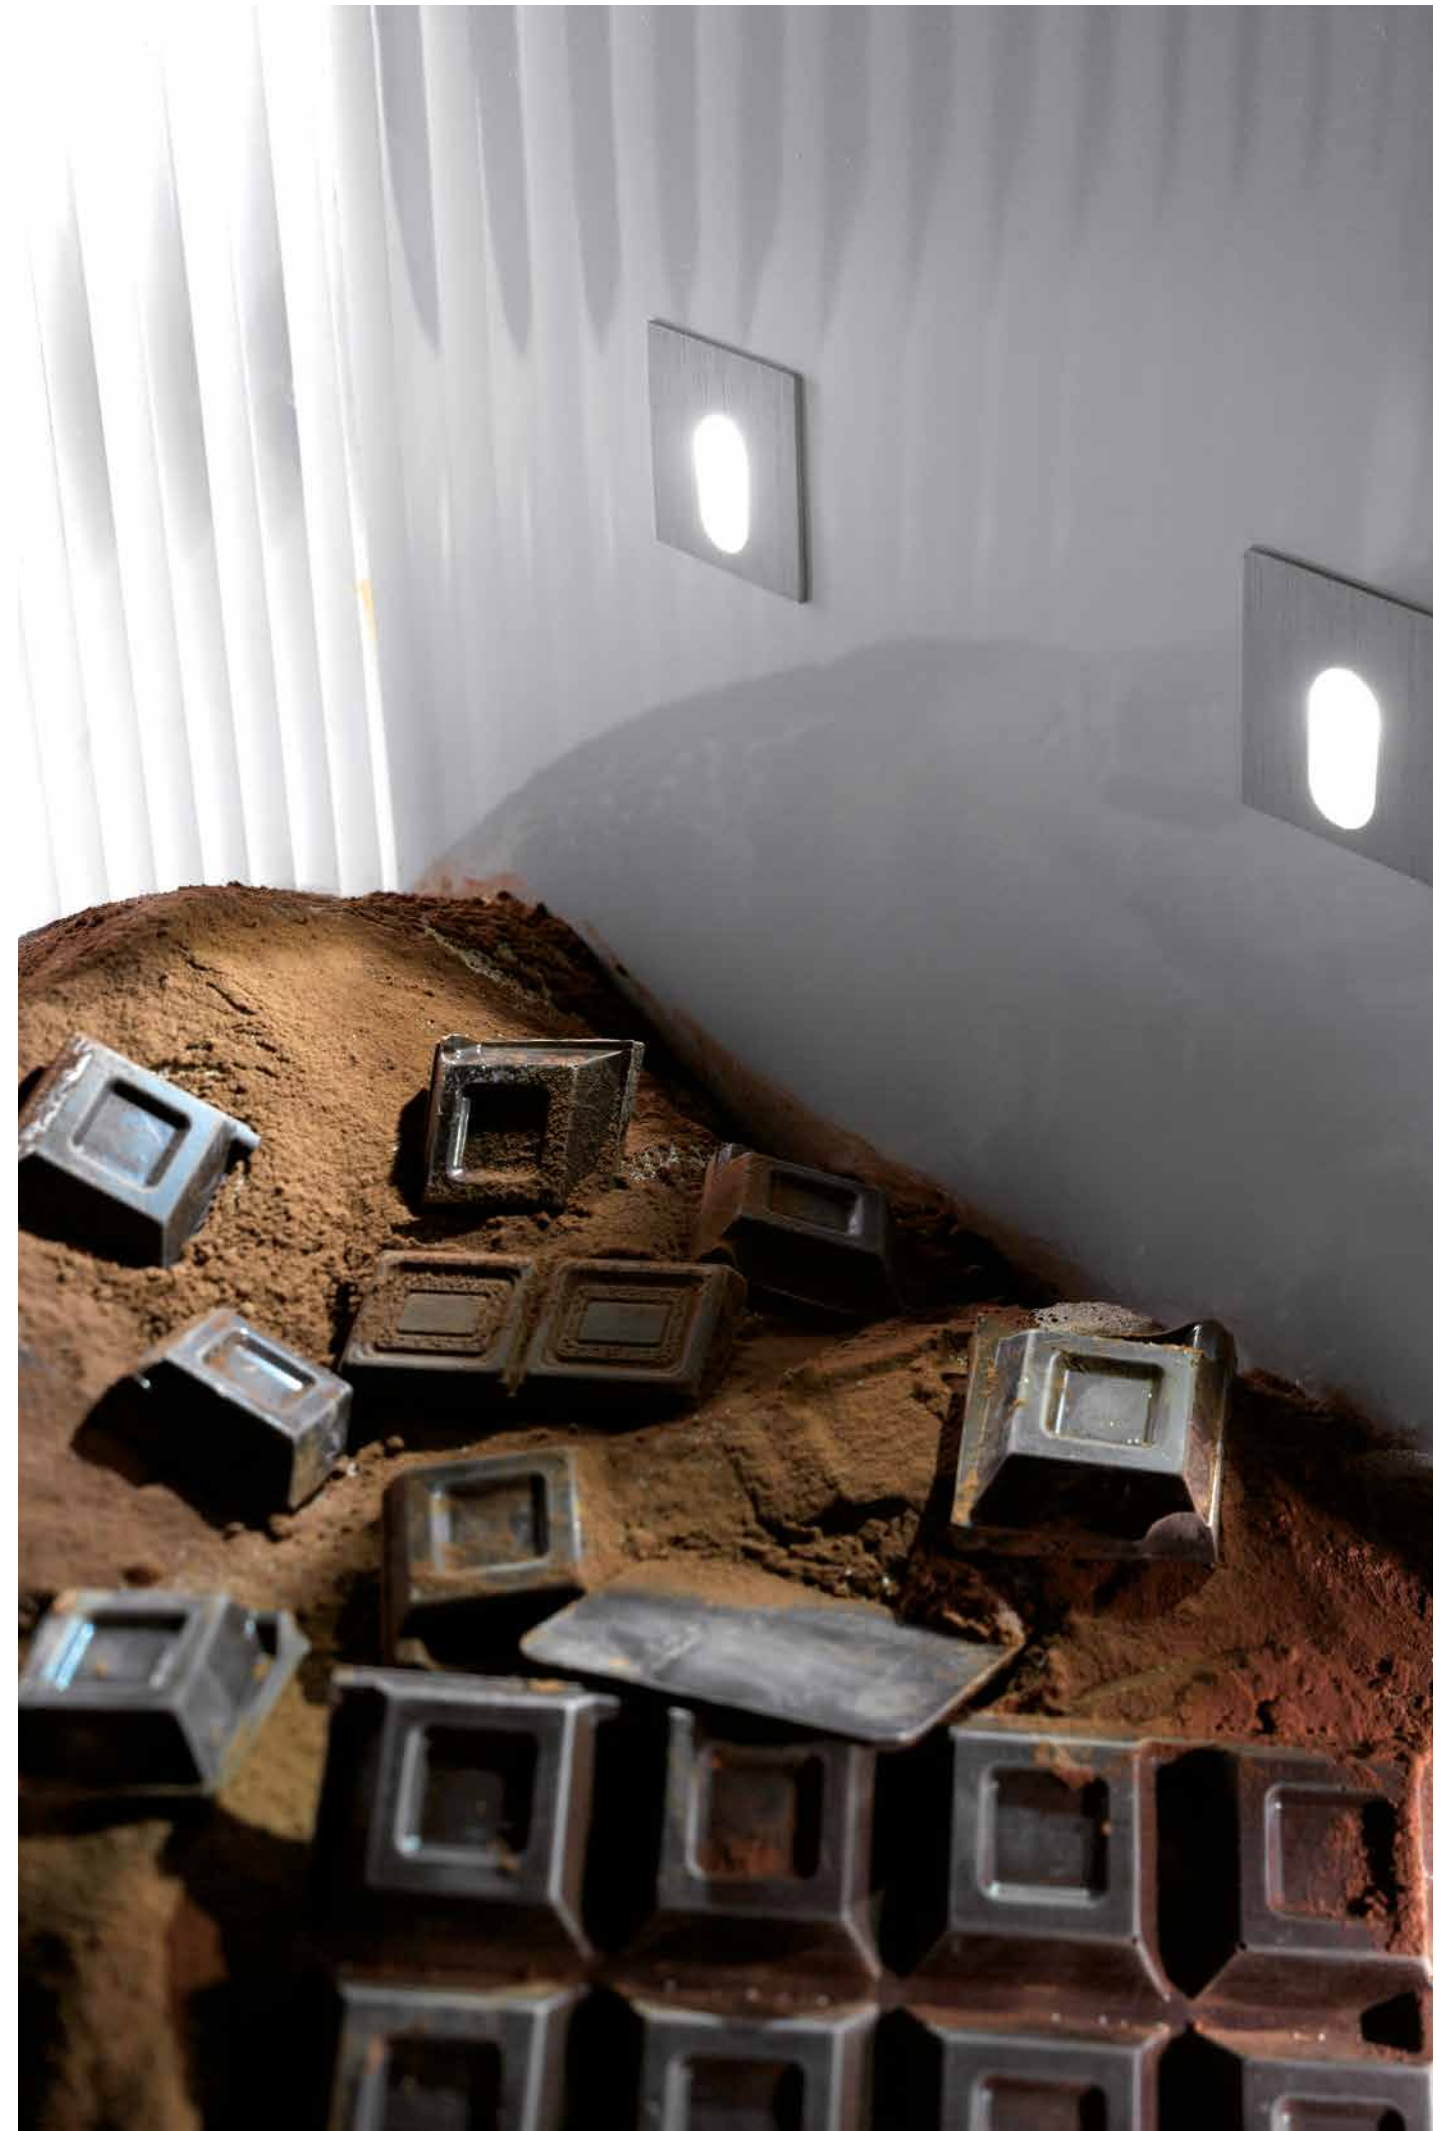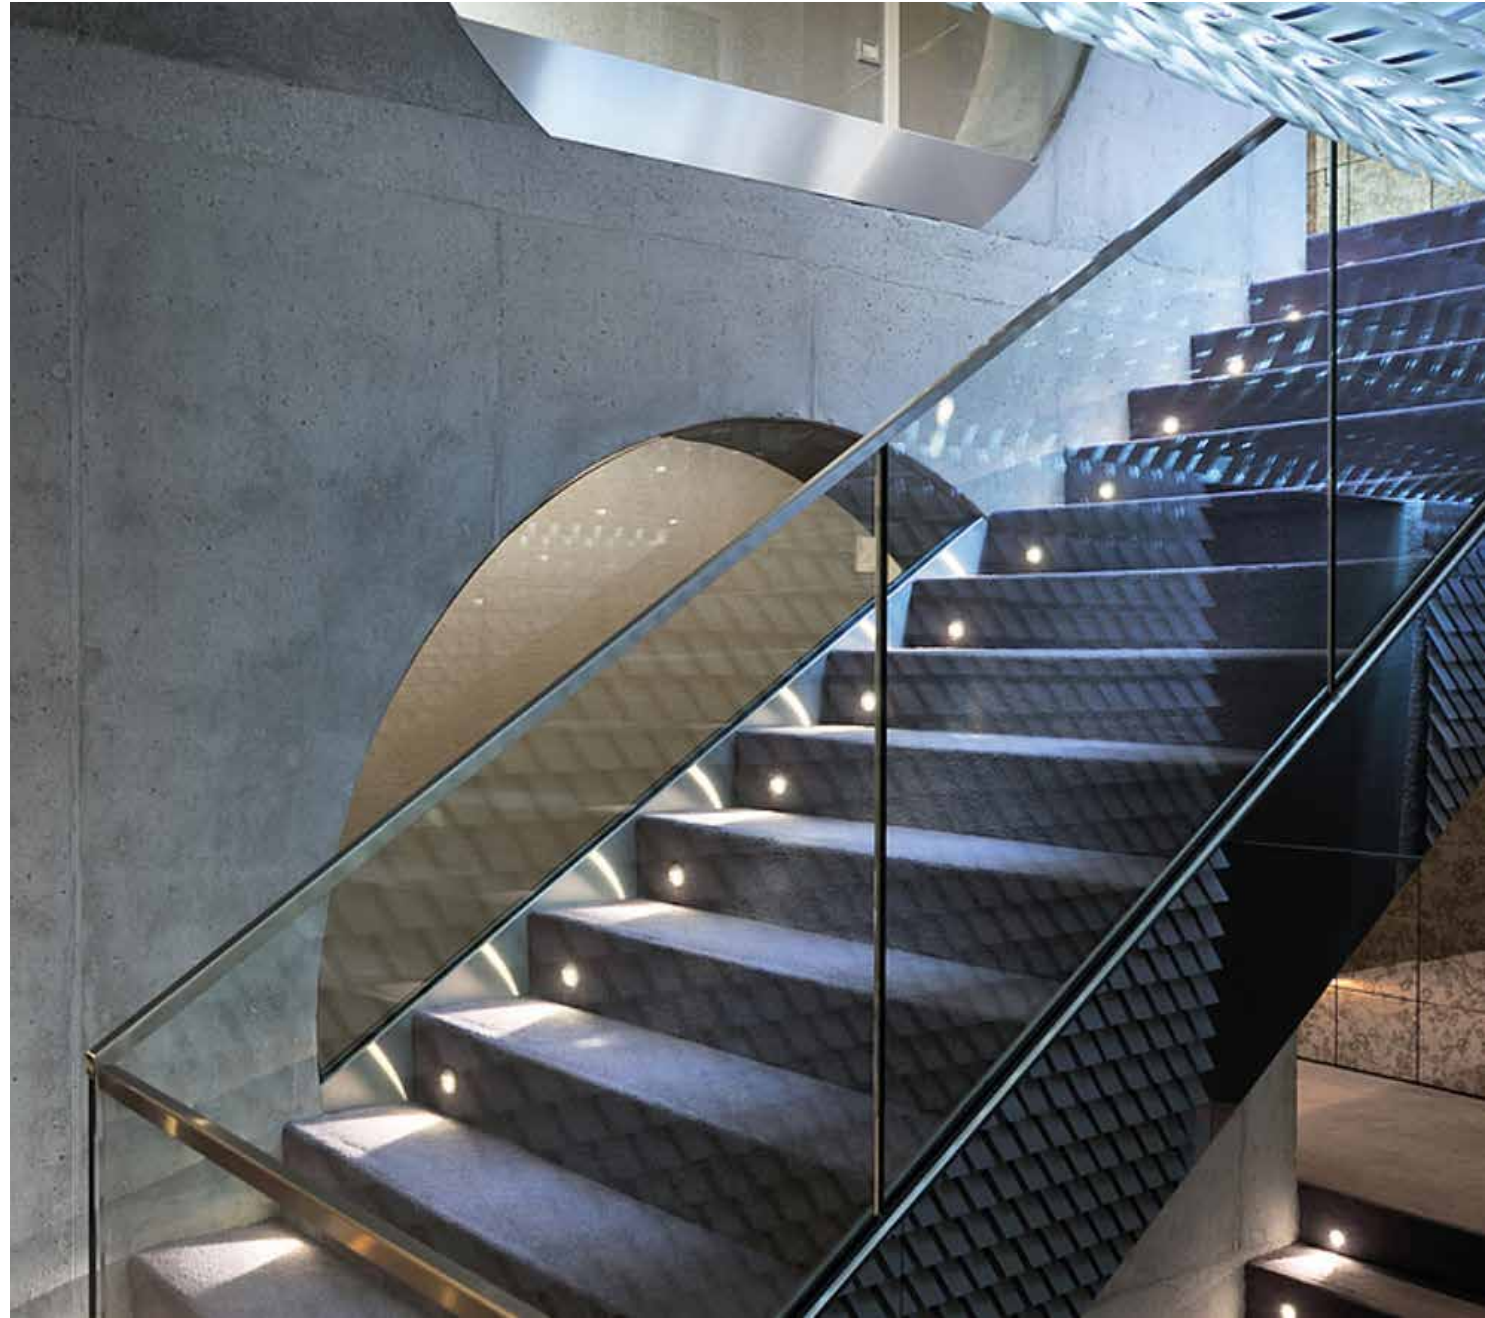

Spoon

Design U.T. Egluce






INDOOR
Slot

Design U.T. EgoLucé




Recessed spotlight for asymmetric light, metal frame in white finish. Heat sink included.
Mounting with or without junction box.

*Foco empotrable con luz asimétrica, estructura metálica con acabado en blanco.
Disipador de calor incluido. Montaje con o sin caja de conexiones.*

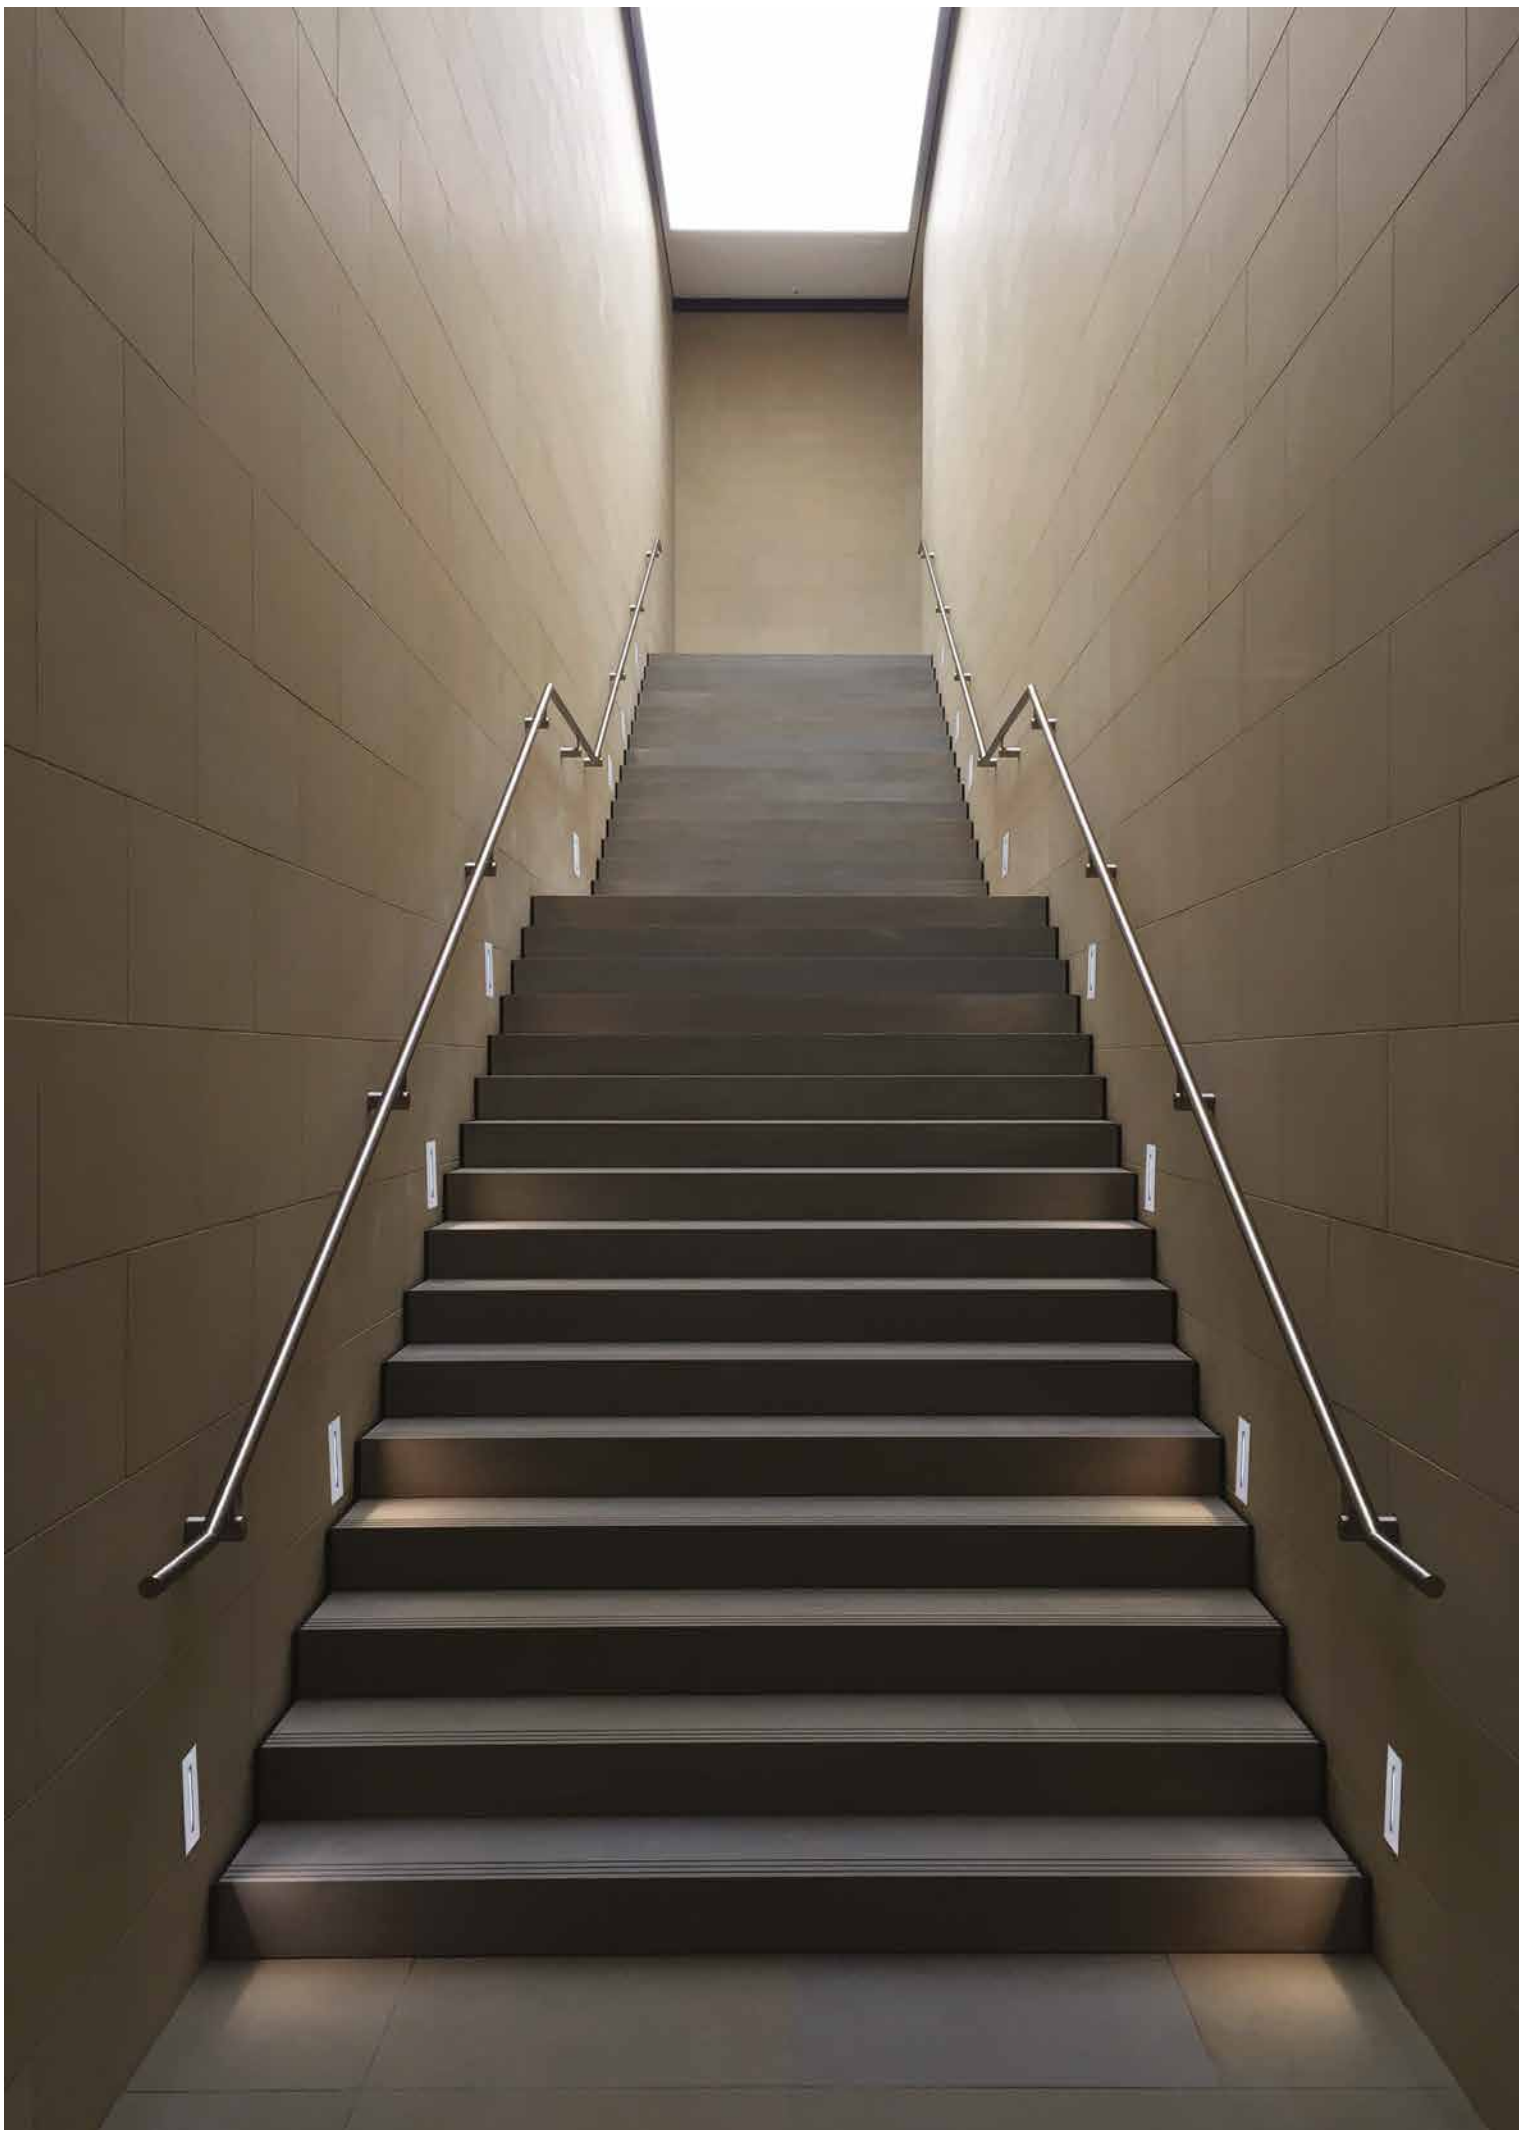

Slot

Design U.T. EGOLUCE

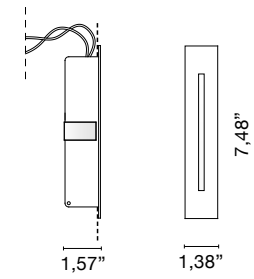

6381._ _ / _ _ 0,44 lb

.01 ■ White - Blanco

/W	4000K	LED 1W CRI>90	350mA	151lm
/WW	3000K	LED 1W CRI>90	350mA	143lm
/XW	2700K	LED 1W CRI>90	350mA	135lm



ACCESSORIES ACCESORIOS



Box + plaster
Caja + yeso

0249

DRIVERS CONDUCTORES

0128	Drivers 350 mA - 1-10 Slot
0141/DIM	Multi-power dimmable driver PUSH - 1...10V - 1-12 Slot
0141/DALI	Multi-power DALI dimmable driver - 1-12 Slot

0145	Multi-power dimmable driver PUSH - 1...10V - 1-21 Slot
0145/DALI	Multi-power DALI dimmable driver - 1-21 Slot

Only serial connection - Solo conexión serie





Technology

Tecnología

General informations

Información general

Our power LED must be powered **ONLY** with low voltage direct current **ONLY IN SERIAL CONNECTION**. Our converters are predisposed for this kind of connection.

We recommend not to exceed 21,87yd of circuit length between converter and LED. Connect all elements before to give tension to the circuit.

Respect correct polarity when connecting.

We strongly recommend to avoid installation of switches between converter and LED.

Nuestros LEDs de potencia deben alimentarse SÓLO con corriente continua de bajo voltaje y conectarse EN SERIE. Nuestras fuentes de alimentación están diseñadas para esta conexión.

Se recomienda no superar los 21,87yd. de longitud de cables entre el balasto y el LED. Conectar todos los focos antes de alimentar el circuito.

Observe las polaridades en la conexión eléctrica para una correcta funcionamiento correcto.

Se desaconseja encarecidamente instalar interruptores entre fuente de alimentación y LED.

REGULACIÓN 1...10V & PUSH PARA COB Y POWER LED

Multi-power drivers supplied with dip-switch for selection of the output current.

Light regulation 0-100% by means of PUSH function, 1...10V interface.

Art. 0133 synchronization cable is sold separately, one commanded master driver can synchronize up to max. 9 slaves

Fuentes de alimentación multipotencia equipadas con interruptores DIP para seleccionar la corriente de salida.

Ajuste de luminosidad 0-100% mediante función PUSH, interfaz 1...10V.

Art. 0133 cable de sincronización suministrado por separado; máx. 10 alimentadores sincronizados, de los cuales sólo se controla uno. (1 Amo + 9 Esclavos)

1...10 V

For light regulation 1...10V the control systems are provided of active terminal connection.

Para la regulación a través de 1...10V, el sistema dispone de un terminal activo específico.



PUSH

Light regulation by means of PUSH function.



A short push to turn on and off; a longer push to increase or decrease light intensity. Regulation automatically stops at minimum and maximum values. For another on, regulation or off command, release the push button and give the desired command again.

Attention: only use normally open push buttons with no incorporated warning light.

0145

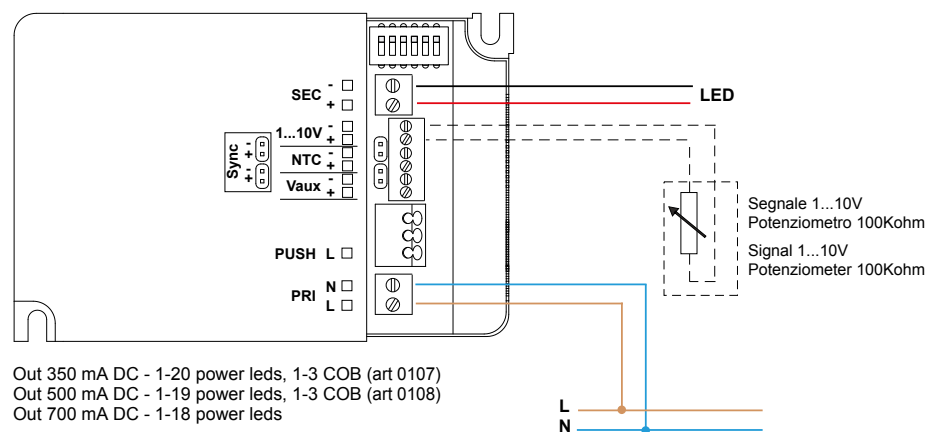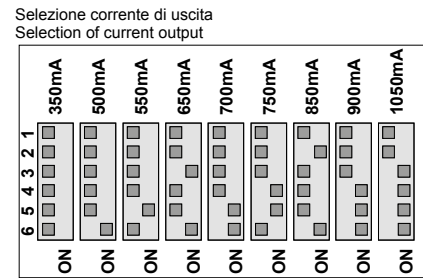

0145

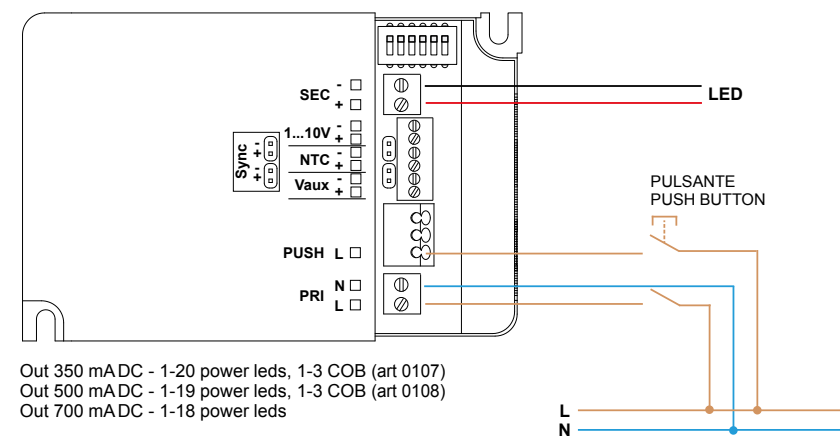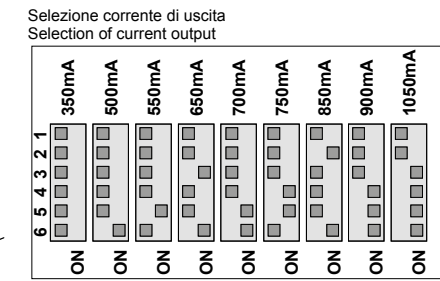

DALI DIMMING PARA COB Y POWER LED



Multi-power drivers supplied with dip-switch for selection of the output current.

Features DALI dimming (0,5-100%):

- memory function for sets or light groups
- recall of stored functions
- compatible with standard DALI interfaces

Art. 0133 synchronisation cable supplied separately; max. 10 synchronised power supplies, of which only one is controlled.

Balastos multipotencia equipados con interruptores DIP para la selección de la corriente de salida.

Funciones de regulación DALI (0,5-100%):

- función de memoria para escenas o grupos de iluminación
- recuperación de funciones almacenadas
- compatibilidad con interfaces estándar DALI



Art. 0133 synchronisation cable is sold separately, one commanded master driver can synchronise up to max. 9 slaves



0129/DALI




0145/DALI

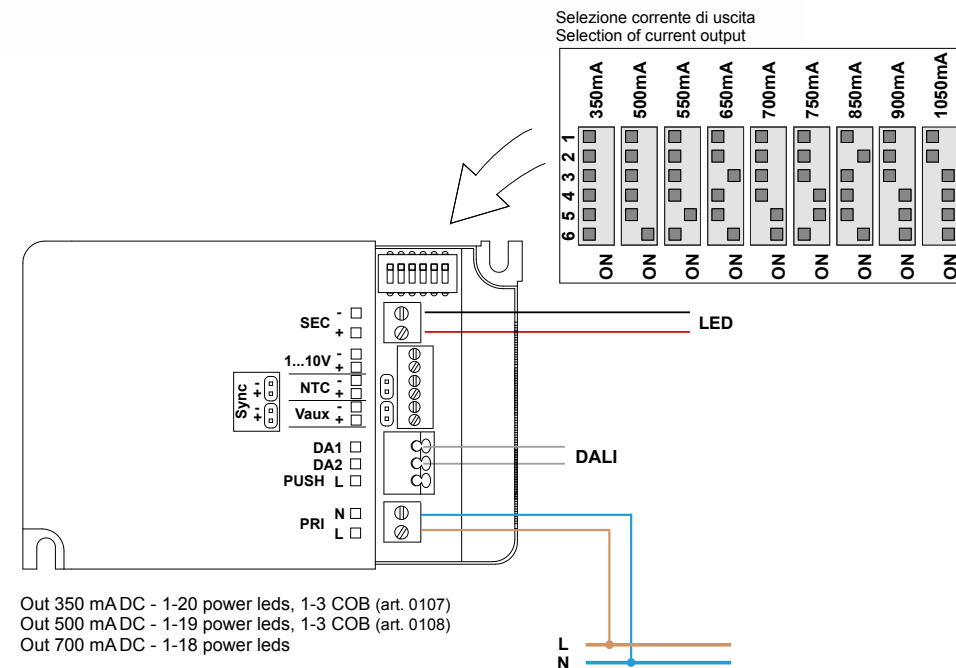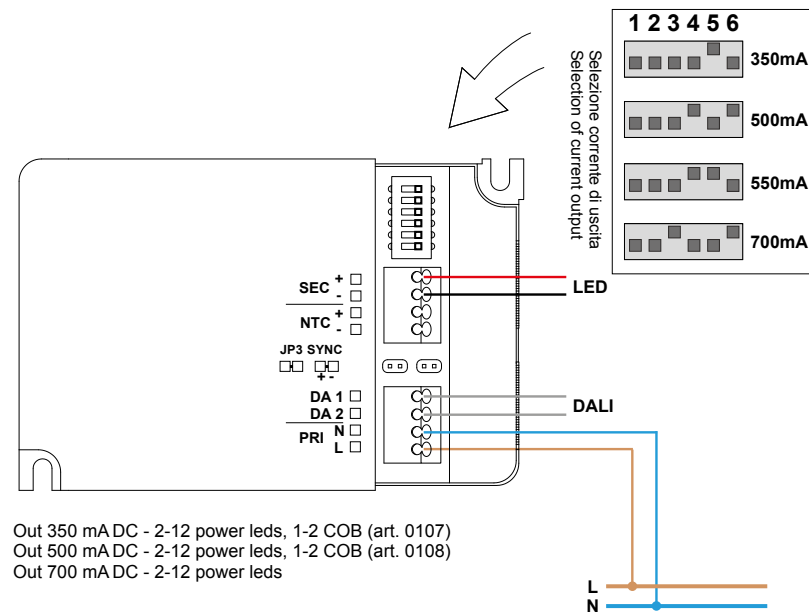


Installations / Instalaciones


0220 - 0228 - 0250 - 0251

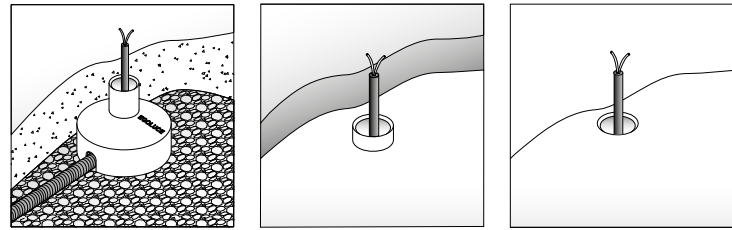




0230 - 0231

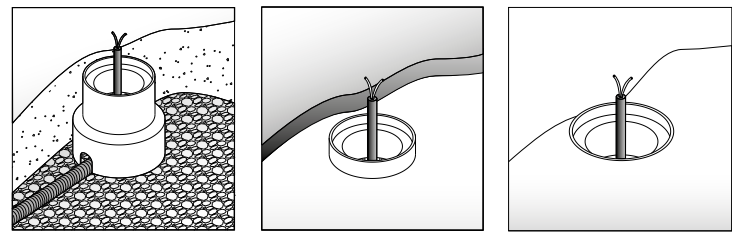


0229

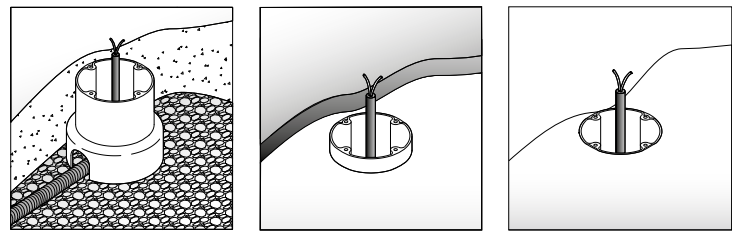


6615 - 6616 - 6617 - 6618

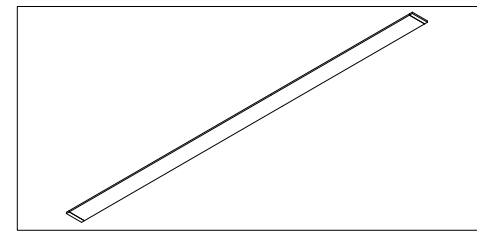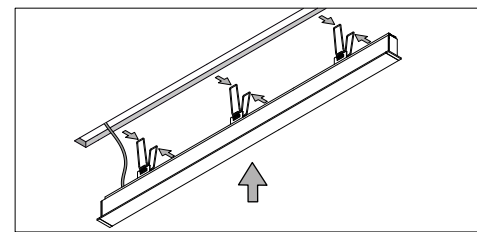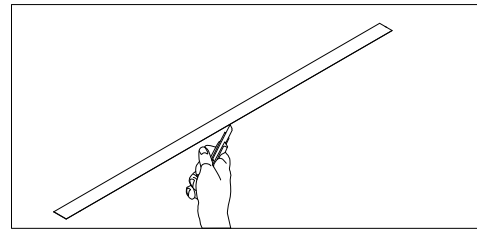


0249

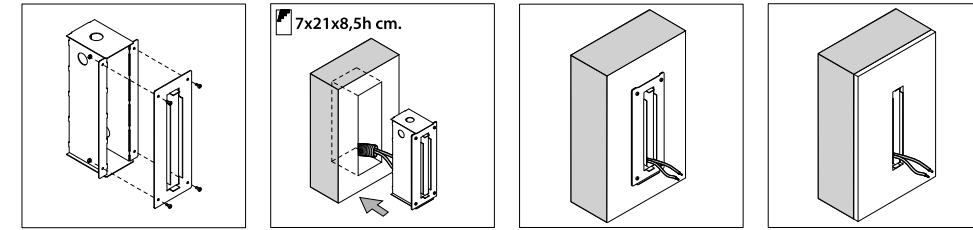


0212 - 0213 - 0214

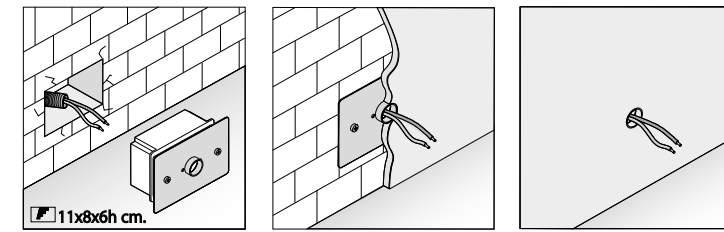


0215 - 0216 - 0217 - 0232

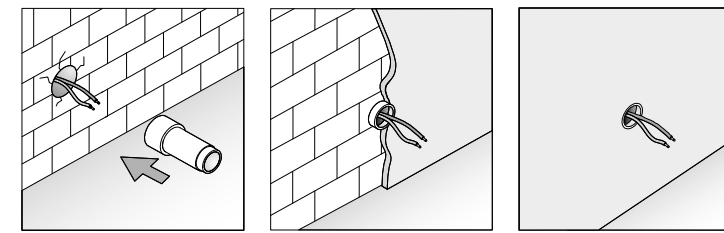

0234

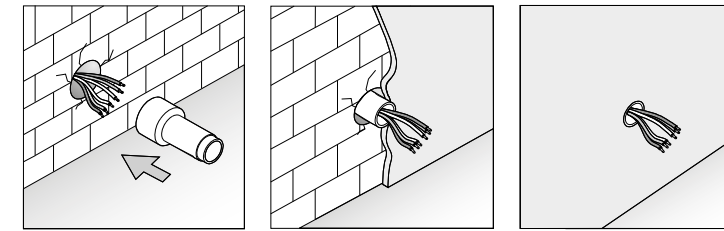


0298 - 0299

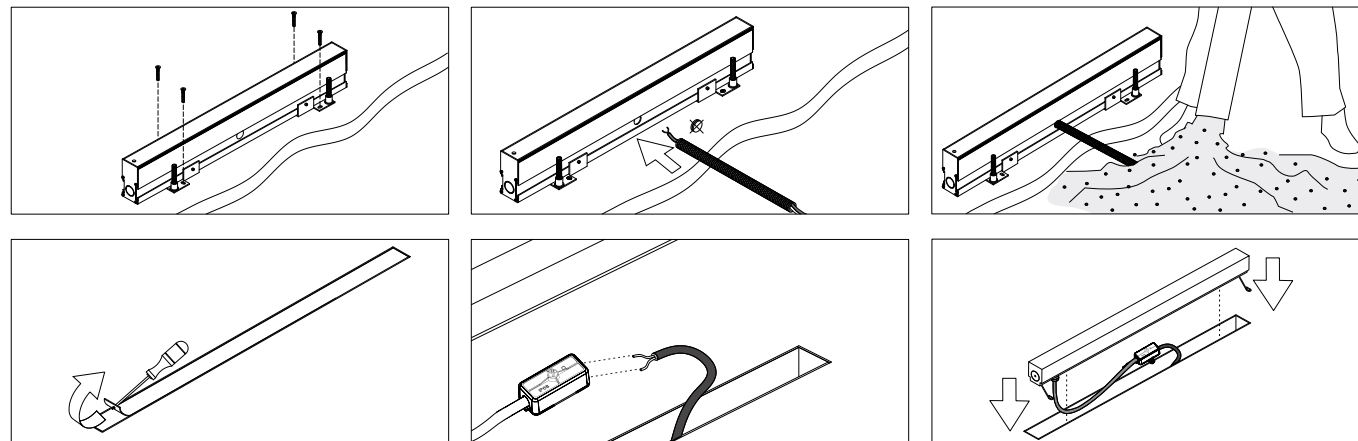

Accessories / Accesorios

0216


Plastic Box
Caja de plástico



Zeppelin, Zeppelin 25 Plus, Kross, Vista, Fire, Ice, Top, Cerchietto, Joy

0220


Kit draining junction box + IP68 connector
Kit de encofrado de drenaje + conector IP68



Zeppelin, Zeppelin 25 Plus, Kross, Vista

0230


Kit draining junction box + IP68 connector
Kit de encofrado de drenaje + conector IP68

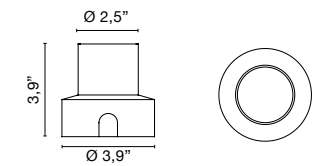

Zeppelin Maxi, Zeppelin turnable

0232

Wall Plastic Box
Encofrado de muros

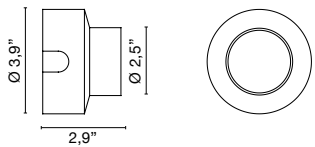

Zeppelin Maxi, Zeppelin turnable, Step

0260

Spring for plasterboar
Accesorio de montaje en cartón yeso



2,36"

Zeppelin Maxi

0238

Spring for plasterboar
Accesorio de montaje en cartón yeso



2,36"

Zeppelin turnable

0210/100


Recessed box 40,7"
Encofrado 40,07"



Linea

0210/150


Recessed box 59,76"
Encofrado 59,76"



Linea

0242/100

Optional L shaped profile to ease installation into plaster-board 39,37"
Perfil angular opcional para facilitar la instalación en cartón yeso 39,37"



Linea

0267

Louvres
Lightbreak



Newton Spots, Newton Track 48V

0274

Anti-glare screen
Pantalla antirreflejos



Newton Spots, Newton Track 48V

0265

Sand-blasted Pirex glass diffuser
Difusor de vidrio Pyrex arenado



Newton Spots Slim, Newton Slim Track 48V

0264

Decorative parabolic reflector
Parábola decorativa



Newton Spots Flat, Newton Flat Track 48V

0247


Stake
Clavija



Vision 1

0243


IP68 Connector for cables
Conector IP68 para cables



Vision 1, Vision 3

0248

Stake
Clavija para instalación temporal en el suelo




Vision 3

Accessories / Accessorios

0231


Kit draining junction box + IP connector
Kit de encofrado de drenaje + conector IP



Tris

0235

Wall Plastic Box
Encofrado de muros



Tris

0233

Spring for plasterboard
Accesorio de montaje en cartón yeso




3,35"

Tris

0217


Plastic Box
Caja de plastico



Soft, Cerchio, Spoon

0250


Kit draining junction box + IP68 connector
Kit de encofrado de drenaje + conector IP68

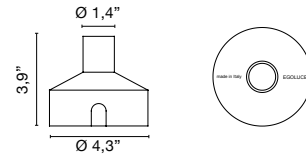

Soft, Cerchio

0229


Kit draining junction box + IP68 connector
Kit de encofrado de drenaje + conector IP68



Drive

0208


Adapter for slats
Adaptador de duelas



Dot

0215



Plastic Box
Caja de plastico



Dot, Sirio, Alcor, Vega, Top Mini, Snorky, Cruise

0212


Kit: box + perforated plaster
Kit: caja + yeso perforado



Dot, Sirio, Alcor, Vega, Top Mini, Snorky, Cruise

0213


Kit: box + perforated plaster
Kit: caja + yeso perforado



Fire, Ice, Top, Pix, Cerchietto, Joy

0209


Adapter for slats
Adaptador de duelas



Pix

0234


Plastic Box
Caja de plastico



Pix

0214


Kit: box + perforated plaster
Kit: caja + yeso perforado

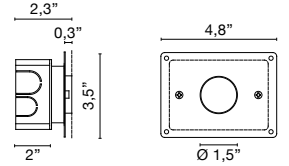

Spoon

0249


Box + plaster
Caja + yeso



Vision 1, Vision 3, Tris, Step, Slot

7521._ _

Aluminium wall base with cover disc
Base mural de aluminio con disco de cubierta de base



.01 White - Blanco

.02 Black - Negro

.06 Green - Verde

.33 Stainless steel AISI 316L - Acero cepillado

.34 Painted corten finishing - Corten pintado

Joy

Accessories / Accesorios

0246/R

Box + plate with steel screws
Caja + placa con tornillos de acero



Joy

7510._ _

Junction element
Elemento de unión

.02 ■ Black - Negro



Joy

0228/R

Draining box
Encofrado drenante



Joy

7522._ _

Base with cover disc
Base con disco de cubierta de base


.01 ■ White - Blanco

.02 ■ Black - Negro

.06 ■ Green - Verde

.33 ■ Stainless steel AISI 316L - Acero cepillado

.34 ■ Painted corten finishing - Corten pintado

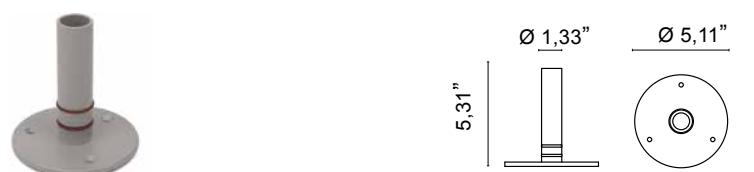

Joy

Numerical index / Índice numérico

code / código	product / producto	pag.	code / código	product / producto	pag.
1665	Wanda System	212	6722	Tiny - 24V track products	94
1690	Lara Maxi	195	6723	Tiny - 24V track products	94
2550	Lara	191	6724	Tiny - 24V track products	94
2552	Lara Maxi	193	6725	Tiny - 24V track products	94
2553	Lara Maxi	193	7516	Joy	170
4510	Vision 1	289	U1540	Lancia	43
4511	Vision 3	290	U1562	Lancia Tonda	16
4536	Wanda	202	U1563	Lancia Tonda	16
4537	Wanda	202	U1564	Lancia Tonda	16
4672	Joy	176	U1566	Lancia Tonda	16
4673	Joy	176	U1567	Lancia di Achille	58
5690	Joy	176	U1570	Radar	72
6320	Dot	301	U1571	Radar	72
6321	Dot	301	U1572	Radar	72
6322	Pix	305	U1573	Lancia Tonda System	18
6323	Pix	305	U1574	Lancia Tonda System	19
6340	Fire	321	U1575	Lancia Tonda XL/XXL	22
6348	Zeppelin	243	U1576	Lancia Tonda XL/XXL	22
6349	Zeppelin	243	U1580	Stick system	147
6350	Spoon	341	U1581	Stick system	147
6351	Spoon	341	U1582	Stick system	147
6354	Ice	325	U1591	Newton System	136
6355	Ice	325	U1592	Newton System	136
6358	Vega	317	U1673	Lancia no limits	50
6359	Sirio	309	U1674	Matita	65
6360	Alcor	313	U1675	Matita	65
6361	Kross	270	U2513	Lancia Tonda	35
6362	Vista	265	U2514	Lancia Tonda	35
6363	Top	295	U3513	Lancia Tonda	36
6364	Top Mini	297	U3514	Lancia Tonda	36
6366	Drive	261	U4582	Moonlight	79
6368	Zeppelin Maxi	247	U4583	Moonlight	79
6369	Step	275	U4620	Moonlight	79
6371	Tris	257	U6342	Newton Spots	112
6373	Snorky	329	U6343	Newton Track 48V	124
6381	Slot	349	U6344	Newton Spots	112
6382	Cruise	337	U6345	Newton Track 48V	124
6383	Zeppelin Maxi	247	U6346	Newton Track 48V	124
6384	Zeppelin 25 Plus	245	U6448	Newton Flat Track 48V	130
6387	Step	275	U6449	Newton Flat Track 48V	130
6388	Soft	279	U6450	Newton Flat Track 48V	130
6389	Cerchio	283	U6451	Newton Slim Track 48V	128
6391	Cerchietto	333	U6452	Newton Slim Track 48V	128
6394	Zeppelin 25 Plus	245	U6468	Newton Spots Flat	123
6397	Zeppelin COB	250	U6469	Newton Spots Flat	123
6411	Zeppelin turnable	253	U6470	Newton Spots Slim	118
6417	Spooky	232	U6471	Newton Spots Slim	118
6418	Spooky	232	U7341	Track 48V	132
6419	Spooky	232	U7342	Track 48V	132
6615	Linea	157	U7343	Track 48V	132
6616	Linea	157			



Our fittings are manufactured in conformity with the european standard CEI-EN 60598 and, consequently, get the mark CE.

Nuestros productos se fabrican de conformidad con las normas europeas CEI-EN 60598 y, como tales, llevan el marcado CE.

Egoluce s.r.l. reserves the right to change, at any time and without prior warning, the technical specification of any product illustrated in this catalogue.
Colours are simply indicative of the real nuance.

Egoluce s.r.l. se riserva el derecho de modificar, en cualquier momento y sin previo aviso, los en cualquier momento y sin previo aviso, las características técnicas de los modelos ilustrados en este catálogo. Los colores son indicativos.

associato a
ASSOLUCE
FEDERLEGNO-ARREDO

ECO LIGHT

Proudly Distributed by



MADE IN ITALY

EGOLUCE s.r.l.

Via I. Newton, 12 - 20016 Pero - Milano - Italy

Tel. +39 02339586.1 - Italia fax +39 023535112 - Int. fax +39 0233911087

E-mail: export@egoluce.com - Int. E-mail: infoworld@egoluce.com

www.egoluce.com

For US Distribution, please contact IM Design Concepts
imdesignconcepts.com | info@imdesignconcepts.com | (813) 284-7435